

DPV11 serial synchronous interface technical manual





EK-DPV11-TM-002

a e Editoria (1981) Sal Status (Roma States)

· 그 회사와 협력 면접 문화를 수 방법에 가 성격을 받을 것 같다.

建设的运行的建筑基本

The endersof in the monad is test adjects much (). Issues and is subject to dimage widows collage

nan gen na vorugen andertogen intergrupt han gib. Einen eine antergene gene dach einem and och allge

DPV11 serial synchronous interface technical manual

tina (hiterativa sentenaria) i liggita (' hiterativa Nara sentenari Xaratarit Xastaratarian

digital equipment corporation ● merrimack, new hampshire

1st Edition, July 1980 2nd Printing (Rev), November 1980

Copyright © 1980 by Digital Equipment Corporation

All Rights Reserved

The material in this manual is for informational purposes and is subject to change without notice.

Digital Equipment Corporation assumes no responsibility for any errors which may appear in this manual.

Printed in U.S.A.

This document was set on DIGITAL's DECset-8000 computerized typesetting system.

The following are trademarks of Digital Equipment Corporation, Maynard, Massachusetts:

DIGITAL	DECsystem-10	MASSBUS
DEC	DECSYSTEM-20	OMNIBUS
PDP	DIBOL	OS /8
DECUS	EduSystem	RSTS
UNIBUS	VAX	RSX
DECLAB	VMS	IAS
		MINC-11

addepend was planship-son softwoaths **translupe islob**

CONTENTS

Page

	SCOPE	
1.2	DPV11 GENERAL DESCRIPTION	1-1
1.3	DPV11 OPERATION	
1.4	DPV11 FEATURES	
1.5	GENERAL SPECIFICATIONS	
1.5.1	Environmental Specifications	
1.5.2	Electrical Specifications	
1.5.3	Performance Parameters	
1.6	DPV11 CONFIGURATIONS	
1.7	EIA STANDARDS OVERVIEW	

CHAPTER 2 INSTALLATION

2.1	INTRODUCTION	
2.2	UNPACKING AND INSPECTION	
2.3	PRE-INSTALLATION REQUIREMENTS	
2.4	INSTALLATION	
2.4.1	Verification of Hardware Operation	
2.4.2	Connection to External Equipment/Link Testing	
2.5	TEST CONNECTORS	

CHAPTER 3 REGISTER DESCRIPTIONS AND PROGRAMMING INFORMATION

3.1	INTRODUCTION	2_1
3.2	DPV11 REGISTERS AND DEVICE ADDRESSES	
3.3	REGISTER BIT ASSIGNMENTS	
3.3.1	Receive Control and Status Register (RXCSR)	
3.3.2	Receive Data and Status Register (RDSR)	
3.3.3	Parameter Control Sync/Address Register (PCSAR)	
3.3.4	Parameter Control and Character Length Register (PCSCR)	3-2
3.3.5	Transmit Data and Status Register (TDSR).	
3.4	DATA TRANSFERS	
3.4.1	Receive Data	
3.4.2	Transmit Data	
3.5	INTERRUPT VECTORS	

iii

CONTENTS (Cont)

Page

CHAPTER 4 TECHNICAL DESCRIPTION

4.1	INTRODUCTION	
4.2	FUNCTIONAL DESCRIPTION	
4.2.1	Logic Description	
4.2.1.1	Bus Transceivers	
4.2.1.2	Read/Write Control USYNRT and Bidirectional Buffer	
4.2.1.3	USYNRT and Bidirectional Buffer	4-1
4.2.1.4	Receive Control and Status Register	4-1
4.2.1.5	Transmit Control and Status Register	4-1
4.2.1.6	Transmit Control and Status Register Interrupt Logic	
4.2.1.7	Data Set Change Logic	4-3
4.2.1.8	Clock Circuit	
4.2.1.9	EIA Level Converters	
4.2.1.10	Charge Pump	
4.2.2	General Operational Overview	
4.2.2.1	Receive Operation	
4.2.2.2	Transmit Operation	
4.3	DETAILED DESCRIPTION	
4.3.1	Bus Transceivers	
4.3.1.1	Address Selection	
4.3.1.2	Address Decode	
4.3.1.3	Bus Data Transfers	
4.3.1.4	Vector Generation.	
4.3.2	Read/Write Control Logic	
4.3.2.1	Register Decode	4-6
4.3.2.2	USYNRT Control	
4.3.3 4.3.3.1	USYNRT, RXCSR and PCSCR USYNRT	/-4-/ / 10
4.3.3.2 4.3.3.3	Receive Control and Status Register Parameter Control and Character Length Register	
4.3.4	Interrupt Logic	
4.3.5	Data Set Change Circuit	
4.3.6	Clock Circuit	
4.3.7	USYNRT Timing	
4.3.8	EIA Receivers	
4.3.9	EIA Drivers	
4.3.10	Maintenance Mode	4-12
CHAPTER 5	MAINTENANCE	
	1. 1. 1. 1. 1. 1. 1. 1. 1. 1. 1. 1. 1. 1	
5.1	SCOPE	5-1
5.2	TEST EOUIPMENT RECOMMENDED	5-1
5.3	MAINTENANCE PHILOSOPHY	
5.4	PREVENTIVE MAINTENANCE	5-2
5.5	CORRECTIVE MAINTENANCE	
5.5.1	Maintenance Mode	
5.5.2	Loopback Connectors	
5.5.3	Diagnostics	
5.5.3.1	CVDPV* Functional Diagnostic	5-3
5.5.3.2	DEC/X11 CXDPV Module	
5.5.3.3	Data Communications Link Test CVCLH* (DCLT)	5-4
0.0.0.0		

CONTENTS (Cont)

Page

APPENDIX A DIAGNOSTIC SUPERVISOR SUMMARY

A.1	INTRODUCTION	A-1
A.2	VERSIONS OF THE DIAGNOSTIC SUPERVISOR	A-1
A.3		
A.4	SUPERVISOR COMMANDS	A-3
A.4.1	Command Switches	
A.4.2	Control/Escape Characters Supported	A-4
A.5		

APPENDIX B USYNRT DESCRIPTION

APPENDIX C IC DESCRIPTIONS

C.1	GENERAL	C-1
C.2	DC003 INTERRUPT CHIP	
C.3	DC004 PROTOCOL CHIP	C-3
C.4	DC005 BUS TRANSCEIVER CHIP	C-3
C.5	26LS32 QUAD DIFFERENTIAL LINE RECEIVER	
C.6	8640 UNIBUS RECEIVER	C-6
C.7	8881 NAND	C-6
C.8	9636A DUAL LINE DRIVER	C-6
C.9	9638 DUAL DIFFERENTIAL LINE DRIVER	C-6

APPENDIX D PROGRAMMING EXAMPLES

GLOSSARY

ILLUSTRATIONS

Figure No.		Page
1-1	DPV11 System	1-1
2-1	DPV11 Jumper Locations	
2-2	H3259 Turn-Around Test Connector	
2-3	RS-423-A with H3259 Test Connector	2-10
2-4	H3260 On-Board Test Connector	
3-1	DPV11 Register Configurations and Bit Assignments	
3-2	Receive Control and Status Register (RXCSR) Format	
3-3	Receive Data and Status Register (RDSR) Format	
3-4	Parameter Control Sync/Address Register (PCSAR) Format	
3-5	Parameter Control and Character Length Register	
	(PCSCR) Format	
3-6	Transmit Data and Status Register (TDSR) Format	
4-1	DPV11 Block Diagram	
4-2	Simplified Functional Diagram	
4-3	Register Decode	
4-4	Timing for Read Operation	
4-5	Timing for Write Operation	
A-1	Typical XXDP+/Diagnostic Supervisor Memory Layout	

ILLUSTRATIONS (Cont)

Figure No.	Title	Page
B- 1	Terminal Connection Identification Diagram	
B-2	5025 Internal Register Bit Map (2112517-0-0 Variation)	
C-1	DC003 Logic Symbol	
C-2	DC004 Simplified Logic Diagram	
C-3	DC005 Simplified Logic Diagram	
C-4	26LS32 Terminal Connection Diagram and Terminal	
	Indentification	
C-5	8640 Equivalent Logic Diagram	C-10
C-6	8881 Pin Identification	
C-7	9636A Logic Diagram and Terminal Identification	
C-8	9638 Logic Diagram and Terminal Identification	

TABLES

	na server and the server of th	1
Table	에는 것은 것을 가지 않는 것을 통해 있었다. 것을 것을 못했다. 것을 것을 것을 것을 것을 것을 것을 못했다. 것을 것을 것을 것 같이 같이 같이 않았다. 것을 것을 것을 것을 것을 것을 것이 같이 않았다. 것을	10
No.	Title Title All All All All All All All All All A	Page
	Title Configuration Sheet	
2-1	Configuration Sheet	2-1
2-2	Vector Address Selection	
2-3	Device Address Selection	2-6
2-4	Voltage Requirements	2-7
2-5	H3259 Test Connections.	
3-1	DPV11 Registers	
3-2	DPV11 Registers Receive Control and Status Register (RXCSR) Bit	A DIGUNAL MANANA AN
	Assignments	
3-3	Assignments Receive Data and Status Register (RDSR) Bit Assignments	3-8
3-4	Parameter Control Sync/Address Register (PCSAR)	
	Bit Assignments	3-11
3-5	Parameter Control and Character Length Register	
55	(PCSCR) Bit Assignments	3-14
3-6	Transmit Data and Status Register (TDSR) Bit Assignments	
4-1	Register Selection	
4-2	USYNRT Register Select	
5-1	Test Equipment Recommended	
C-1	DC003 Pin/Signal Descriptions.	
C-1 C-2		
C-2 C-3	DC004 Pin/Signal Descriptions	
C-3	DC005 Pin/Signal Descriptions	C-0
		t series and series
	South Canter (RADA CONSCIPTION STREET STREET) STREET	
	Receive Data and Status Revisits (PARS) (Somethinson and svices)	
	Parameter Chatesh Synaple variation Regiment (1913) NR House Communication	
	to age of a special solution in the classes of the second special spec	
	(PCSCS) Farast	
	Transmit Data and Stanus Reginer (TherP) Formation of Amazine	
	TALE BROOK BROCK	
	·····································	
	Beger Droode	
	n distant best 2 and grinni l	
		r

PREFACE

This manual was written to satisfy the needs of Field Service and Educational Service Training personnel.

It contains the following categories of information.

- General description including features, specifications, and configurations
- Installation
- Programming
- Technical Description
- Maintenance

The manual also contains four appendixes which include diagnostic information, integrated circuit descriptions, and programming examples.

The DPV11 Field Maintenance Print Set (MP00919) contains useful additional information.

ADA AR**MA**

T**his manual was written to ant**rig the acads of fileld hereics and fiducational <mark>Forvice Fraining</mark> porchange.

It contains the following categories of internetion.

- 🙍 Coneral description included activity, securical activity and configurations :
 - mobaliziasi 🕷
 - 🕸 Programman
 - moliginologi Description
 - sonnsininM &

The mound also contains four appointnes which instruct diagonistic information, integrated circuit de seriotions, and programming ananyles.

The DPV (1 Field Maintenance Drug fact (MP007) (), contrast usofist additional information

CHAPTER 1 INTRODUCTION

1.1 SCOPE

This chapter contains introductory information about the DPV11. It includes a general description, and a brief overview of the DPV11 operation, features, general specifications, and configurations.

1.2 DPV11 GENERAL DESCRIPTION

The DPV11 is a serial synchronous line interface for connecting an LSI-11 bus to a serial synchronous modem that is compatible with EIA RS-232-C interface standards and EIA RS-423-A and RS-422-A electrical standards. EIA RS-422-A compatibility is provided for use in local communications only (timing and data leads only). The DPV11 is intended for character-oriented protocols such as BISYNC, byte count-oriented protocols such as DDCMP, or bit-oriented data communication protocols such as SDLC. The DPV11 does not provide automatic error generating and checking for BISYNC.

The DPV11 consists of one double-height module and may be connected to an EIA RS-232-C modem by a BC26L-25 (RS-232-C) cable.

The DPV11 is a bus request device only and must rely on the system software for service. Interrupt control logic generates requests for the transfer of data between the DPV11 and the LSI-11 memory by means of the LSI-11 bus. (Figure 1-1 shows the DPV11 system.)

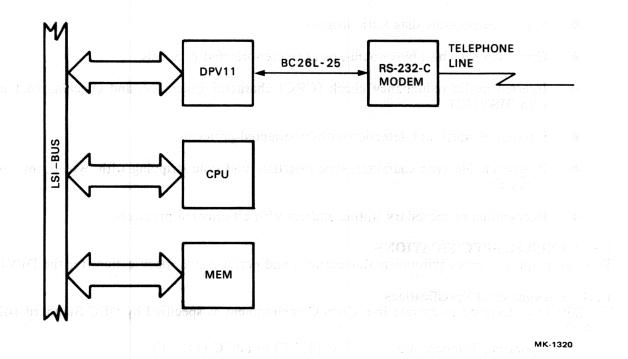


Figure 1-1 DPV11 System

1.3 DPV11 OPERATION

The DPV11 is a double-buffered program interrupt interface that provides parallel-to-serial conversion of data to be transmitted and serial-to-parallel conversion of received data. The DPV11 can operate at speeds up to 56K b/s.* It has five 16-bit registers which can be accessed in word or byte mode. These registers are assigned a block of four contiguous LSI-11 bus word addresses that start on a boundary with the low-order three bits being zeros. This block of addresses is jumper-selectable and may be located anywhere between 160000_8 and 177776_8 . Two of these registers share the same address. One is accessed during a read from the address, the other during a write to the address. For a detailed description of each of the five registers, refer to Chapter 3. These registers are used for status and control information as well as data buffers for both the transmitter and receiver portions of the DPV11.

1.4 DPV11 FEATURES

Features of the DPV11 include:

- Full-duplex or half-duplex operation
- Double-buffered transmitter and receiver
- EIA RS-232-C compatibility
- All EIA RS-449 Category I modem control
- Partial Category II modem control to include incoming call, test mode, remote loopback, and local loopback

state and data leads only). The DF

means of the LSI-11 bus. (Figure 1

The DPVLI consists of one dealership hereitant

- Program interrupt on transitions of modem control signals of straupor saturations and longer
- Operating speeds up to 56K b/s (may be limited by software or CPU memory)
- Software-selectable diagnostic loopback
- Operation with bit-, byte count-, or character-oriented protocols
- Internal cyclic redundancy check (CRC) character generation and checking (not usable with BISYNC)
- Internal bit-stuff and detection with bit-oriented protocols.
- Programmable sync character, sync insertion, and sync stripping with byte count-oriented protocols.
- Recognition of secondary station address with bit-oriented protocols.

1.5 GENERAL SPECIFICATIONS

This paragraph contains environmental, electrical, and performance specifications for the DPV11.

1.5.1 Environmental Specifications

The DPV11 is designed to operate in a Class C environment as specified by DEC Standard 102 (extended).

Operating Temperature	5° C (41° F) to 60° C (140° F)
Relative Humidity	10% to 90% with a max, wet bulb temperature of 28° C (82° F) and a min. dew point of 2° C (36° F)

^{*} The actual speed realized may be significantly less because of limitations imposed by the software and/or CPU memory refresh.

1.5.2 Electrical Specifications

The DPV11 requires the following voltages from the LSI-11 bus for proper operation.

+12 V at 0.30 A max. (0.15 A typical) +5 V at 1.2 A max. (0.92 A typical)

The interface includes a charge pump to generate a negative voltage required to power the RS-423-A drivers.

Full or half-duplex

The DPV11 presents 1 ac load and 1 dc load to the LSI-11 bus.

1.5.3 Performance Parameters

Performance parameters for the DPV11 are listed as follows.

Operating Mode

Data Format

Character Size

Max. Configuration

16 DPV11 modules per LSI-11 bus

Synchronous BISYNC, DDCMP, and SDLC

Max. Distance

15 m (50 ft) for RS-232-C. 61 m (200 ft) for RS-423-A/RS-422-A (Distance is directly dependent on speed, and 200 ft is a suggested average. See RS-449 specification for details.)

Program-selectable (5-8 bits with character-oriented protocols and 1-8 bits with bit-oriented protocols)

Max. Serial Data Rates

56K b/s (May be less because of software and memory refresh limitations.)

1.6 DPV11 CONFIGURATIONS

There are two DPV11 configurations, the DA and the DB.

DPV11-DA Unbundled version consists of: M8020 module Module Configuration Sheet (EK-DPV11-CG)

DPV11-DB Bundled version consists of: M8020 module H3259 turn-around connector BC26L-25 cable DPV11 User Manual (EK-DPV11-UG) LIB kit (ZJ314-RB) Field Maintenance Print Set (MP00919)

Turn-around connectors, cables and documentation may be purchased separately.

1.7 EIA STANDARDS OVERVIEW (RS-449/RS-232-C)

The most common interface standard used in recent years has been the RS-232-C. However, this standard has serious limitations for use in modern data communication systems. The most critical limitations are in speed and distance. For this reason, RS-449 standard has been developed to replace RS-232-C. It maintains a degree of compatibility with RS-232-C to accommodate an upward transition to RS-449.

The most significant difference between RS-232-C and RS-449 is in the electrical characteristics of signals used between the data communication equipment (DCE) and the data terminal equipment (DTE). The RS-232-C standard uses only unbalanced circuits, while the RS-449 uses both balanced and unbalanced electrical circuits. The specifications for the types of electrical circuits supported by RS-449 are contained in EIA standards RS-422-A for balanced circuits and RS-423-A for unbalanced circuits. These new standards permit much greater transmission speed and will allow greater distance between DTE and DCE. The maximum transmission speeds supported by RS-422-A and RS-423-A circuits vary with cable length; the normal speed limits are 20K b/s for RS-423-A and 2M b/s for RS-422-A, both at 61 m (200 feet).

Another major difference between RS-232-C and RS-449 is that additional leads are needed to support the balanced interface circuits and some new circuit functions. Two new connectors have been specified to accommodate these new leads. One connector is a 37-pin Cinch used in applications requiring secondary channel functions. Some of the new circuits added in RS-449 support local and remote loopback testing, and stand-by channel selection.

romana de la sub-ana (ma anna an anarachaenan) anticeas - d'i shi birataid birataith protocols)

(4) m (4) (a) or RN-233-C. [4] m (200 ft) for RS-423-A. [55:422-A. (Distance is directly dependent on apout and 200 ft. Et a suggested average, See RS-449 specifiedtion for details.)

Jax, Serial Data Rates -

Sik and a survey of less because of software and memory reference firsterious.)

1.6 DEVELCONFICURATIONS

Max, Distance

There are two DPVH configurations, the PA and the P.F.

3PV1+DA Inbundled version consists of: M8020 module Module Configuration/Sheet (E3C D2V1

Turn-around connectors, cables and downmentation may be purchased separately.

1.7 BIA STANDARDS OVERVIEW (BS-469)7(S-232-C)

The most common interface standard used in recent years have not RS-232-C. However, this standand has serious limitations for use in modern data communication systems. The most critical limitations are in speed and distance.

CHAPTER 2 INSTALLATION

2.1 INTRODUCTION

This chapter provides all the information necessary for a successful installation and subsequent checkout of the DPV11. Included are instructions for unpacking and inspection, pre-installation, installation and verification of operation.

2.2 UNPACKING AND INSPECTION

The DPV11 is packaged in accordance with commercial packing practices. Remove all packing material and verify that the following are present.

M8020 module H3259 turn-around connector BC26L-25 cable DPV11 User Manual (EK-DPV11-UG) LIB kit (ZJ314-RB) Field Maintenance Print Set (MP00919)

Inspect all parts carefully for cracks, loose components or other obvious damage. Report damages or shortages to the shipper immediately, and notify the DIGITAL representative.

2.3 PRE-INSTALLATION REQUIREMENTS

WON Dutan Addamined on Tommon

Table 2-1 (Configuration Sheet) provides a convenient, quick reference for configuring jumpers.

Driver	Normal* Configuration	Alternate* Option	Description
Terminal Timing	W1 to W2	Not connected	Bypasses attenuation resistor. Jumper must be removed for cer- tain modems to operate properly.

Table 2-1 Configuration Sheet

(W3-W11) Interface Selection Jumpers

Input Signals	Normal* Configuration	Alternate* Option	Description
SQ/TM (PCSCR-5)	W5 to W6		Signal quality
(PCSCR-5)	4 G 20 Trans Cuppe I - 13 George III George III	W7 to W6	Test mode
DM (DSR) (RXCSR-9)	Not connected	W10 to W9	Data mode return for RS-422-A

*Normal configuration is typically RS-423-A compatible. Alternate option is typically RS-422-A compatible.

2-1

Table 2-1 Configuration Sheet (Cont)

(W3-W11) Interface Selection Jumpers (Cont)

Output Signals	Normal* Configuration	Alternate* Option	Description
SF/RL (RXCSR-0)	11 W3 to W4		Select frequency
		W5 to W3	Remote loopback
Local Loopback	W8 to W9	Not connected	This chapter provides all the information out of the DFV11_IAS addool [soc] ruct
Loopback	Not connected	W8 to W11	Local loopback (alternate pin)

(W12-W17) Receiver Termination Jumpers

Receiver	Normal* Configuration	Alternate* Option	M8020 module following are fol
Receive Data	Not connected	W12 to W13	Connects terminating resistor for
Send Timing	Not connected	W14 to W15	RS-422-A compatibility V90
Receive			Field Maintenance Print Set (MP01)
Timing mab Inoqus	Not connected	W16 to W17	Inspect all parts carefully for cracks, lore
	· 사망했던 1011년 소리가 가지 않는다	W16 to W17	li parta carefully for cracks, loss to the shipper framediately, and

(W18-W23) Clock Jumpers

Function	Normal*	Alternate*	T.ble 2-1 (Configuration Sheet) provides
	Configuration	Option	Description
NULL MODEM CLK	W20 to W18	2-1 (mitgaration	Sets NULL CLK MODEM CLK to 2 kHz.
		W21 to W18	Sets NULL MODEM CLK to 50 kHz.
Clock Enable	W19 to W21	W19 to W21	Always installed except for factory
	W22 to W23	W22 to W23	testing. DW formation

(W24-W28) Data Set Change Jumpers

Modem Signal Name	Normal* Configuration	Alternate* Option	(W3-W11) Interface SenoitpinZpers
Data Mode (DSR) Clear to Send	W26 to W24 W26 to W25	Not connected	Connects the DSCNG flip-flop to the respective modem status signal for transition detection.
Incoming Call	W26 to W27	Not connected	Note: W26 is input to DSCNG flip- flop
Receiver Ready (Carrier Detect)	W26 to W28	Not connected	DM (DSR) Not connected (EXCSR-9)

*Normal configuration is typically RS-423-A compatible. Alternate option is typically RS-422-A compatible. According to the second seco

2-2

Table 2-1 Configuration Sheet (Cont)

Device Address Jumpers GND A9 A12 A11 A10 A8 A7 A6 A5 A4 A3 W38 W29 W31 W30 W36 W33 W32 W39 W37 W34 W35

NOTÉ

The address to which the DPV11 is to respond is daisy-chain jumpered to W29 (GND).

Vector Address Jumpers

D 8	D7	D6	D5	D4	D3	Source
W43	W42	W41	W40	W44	W45	W46

NOTE

Vector address to be asserted is daisy-chain jumpered to W46.

NOTE

Table 2-1 shows the recommended normal and alternate jumpering schemes. Any deviation from these will cause diagnostics to fail and require restrapping for full testing and verification. It is recommended that customer configurations that vary from this scheme not be contractually supported.


Prior to installing the DPV11, perform the following tasks.

1. Verify that the following modem interface wire-wrap jumpers are installed (Figure 2-1).

W26 to W25 to W24 to W28 to W27 W22 to W23 and W19 to W21 W18 to W20 W5 to W6 W3 to W4 W8 to W9 W1 to W2

This is the shipped configuration. Some of these jumpers may be changed when the module is connected to external equipment for a specific application. The RS-423-A NULL MODEM CLK is set to 2 kHz as shipped.

- 2. Based on the LSI-11 bus floating vector scheme or user requirements, determine the vector address for the specific DPV11 module being installed and configure W40 through W46 accordingly (Table 2-2). The floating vector ranking is 22.
- 3. Based on the LSI-11 bus floating address scheme or user requirements, determine the device address range for the DPV11 module and configure W30 through W39 accordingly (Table 2-3). Devices may be physically addressed starting at 160000 and continuing through 177776; however, there may be some software restrictions. The normal addressing convention is as shown in Table 2-3. The floating address ranking is 44.

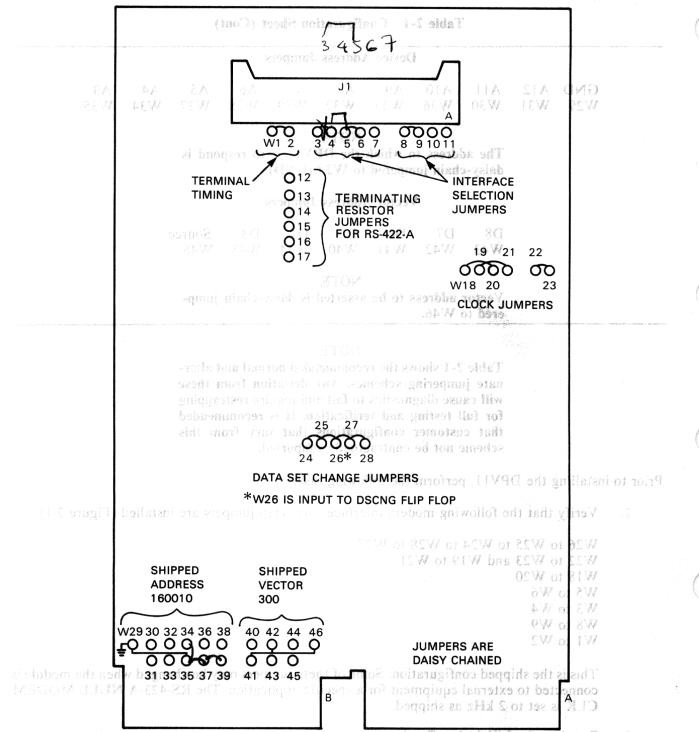

Based on the LSI-11 bus floating vector vehene or user requirements, determine the vector addisservements, determine the vector addisservement, determine the vector addisservements, de

Based on the LSI-11 bus floating address scheme or user requirements, determine the device address range for the DPV11 module and configure W30 through W39 accordingly (Table 2-3); Devices may be physically addressed starting at 160000 and continuing through 177776; however, there may be some software restrictions. The normal addressing convention is as shown in Table 2-3. The floating address ranking is 44.

Table 2-2 Vector Address Selection

DPV11 (M8020) VECTOR ADDRESSING

<u>ASB</u>	Micenicio de	a ann an Annaichean an Annai	anali ke serde		a dan barin		and a final and a second		Kanalagi seri sejar	al energi antika mari dar	a magazi e si sa	an a	a an	elași (preși e opție) e	LSB
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1 ^{31,1}	0
0	0	0	0	0	0	0	0.25	987 D	JUM	PERS	en e chairtí e b	anna an an 1944. Anns an Anns an Anns	1/0	0	0

	JUMPER NUMBER	W43	W42	W41	W40	W44	W45	VECTOR ADDRESS
•			x	x				300
小小			Â	Îx			x	310
			Îx	Îx		x		320
			x	x		x	x	330
			x	x	х			340
1.5	「北京」は「曹」		x	x	X		х	350
		2	X	x	х	x		360
			X	х	X	X	x	370
		X						400
		х		X				500
		х	X					600
		X	X	X				700
6.1								

"X" INDICATES A CONNECTION TO W46. W46 IS THE SOURCE JUMPER FOR THE VECTOR ADDRESS JUMPERS ARE DAISY CHAINED.

2-5

MK-1341

Table 2-3 Device Address Selection

DPV11-XX (M8020) DEVICE ADDRESSING

15 ₍₎	14	13 _S	12	11	10 ₂	9	8	7	6	5	4	3 <u>C</u>	2	1	0
1	1	1 0\	4	alisten Beleiko eskanar ere	, er trischæve 1915 -		JUM	PERS		entralisation constructions of the second	10		0 0	0	0

	JUMPER NUMBER		W31	W30	W36	W33	W32	W39	W38	W37	W34	W35	DEVICE ADDRESS
e o contratos	enne processantois congrafiadationaticada tanàn	is difet materic pr		99 p. 12 10 10 10 10 10 10 10 10 10 10 10 10 10	and a state of the	n finnennen Sj	inter a conservation and	ar ann llon Nice 		geologiocome loco	or O'r - Odersongda	Х	760010
	300				and the second second		έx.				х		760020
			\times				i x		1000		X	Х	760030
							$ \in \mathbb{R}$			х			760040
		1	\rightarrow	X					inter a constant	Х		х	760050
							X		1.1	х	Х		760060
			X		X		1 20	2		Х	Х	х	760070
				X			1 Y		Х				760100
				X	- X	- 19 ×	\rightarrow \times	111					
						100		Х	Carden A.				760200
								X	х				760300
									and the second				
					- Andrews		Х						760400
						Mar .							
								- K.	х				760500
						ALC: N		~					
					and a second		х	х					760600
							х	х	х				
								^	^				760700
						х							761000
								diante a la					761000
					х							and the second second	762000
por presidente de la construcción d	enterentene o de qui de o nacquiada	igen i contrattion de	er närdeller en standaster til	ngo so sé nincin ripala) ni sé	A D	ande ar sense Statue (* 1737)	11.0x11.1	andania yang CANATA	er Albertaleria 1975 - A	n an	OVA V	oentil (/02000
		2.23	ROOR	8000	х	x		가지 있는 가슴 2년 1월 1988년 1월			46.13	N	763000
		an the start	e e hao hao Ki					15 V	1A()	44.21			,00000
				х					1.1.1.2		and the second second		764000

' INDICATES A CONNECTION TO W29. W29 IS TIED TO GROUND. JUMPERS ARE DAISY CHAINED.

MK-1339

2.4 INSTALLATION

The DPV11 can be installed in any LSI-11 bus-compatible backplane such as H9270. LSI-11 configuring rules must be followed. Proceed with the installation as follows. For additional information refer to PDP-11/03 User Manual EK-LSI11-TM or LSI-11 Installation Guide EK-LSI11-IG.

Configure the address and vector jumpers at this time if they have not been previously done 1. (Paragraph 2.3).

WARNING Turn all power OFF.

2. Connect the female Berg connector on the BC26L-25 cable to J1 on the M8020 module [†] and plug the module into a dual LSI-11 bus slot of the backplane.

CAUTION

Insert and remove modules slowly and carefully to avoid snagging module components on the card guides.

- 3. Connect the H3259[†] turn-around connector to the EIA connection on the BC26L-25 cable. The jumper W1 on the H3259 turn-around connector must be removed.
- 4. Perform resistance checks from backplane pin AA2 (+5 V) to ground and from AD2 (+12 V) to ground to ensure that there are no shorts on the M8020 module or backplane.
- 5. Turn system power on.
- 6. Check the voltages to ensure that they are within the specified tolerances (Table 2-4). If voltages are not within specified tolerances, replace the associated regulator (H780 P.S.)

Table 2-4 Voltage Requirements

Voltage	Max.	Min.	Backplane Pin
+5 V	+5.25	+4.75	AA2
+12 V	12.75	+11.25	AD2

2.4.1 Verification of Hardware Operation

The M8020 module is now ready to be tested by running the CVDPV* diagnostic. Additional information on the DPV11 diagnostics is contained in Appendix A and Chapter 5. Proceed as follows.

NOTE The * represents the revision level of the diagnostic.

1. Load and run CVDPV*. Three consecutive error-free passes of this test is the minimum requirement for a successful run. If this cannot be achieved, check the following.

Board seating Jumper connections Cable connection Test connector

If a successful run is still unachievable, corrective maintenance is required (see Chapter 5).

2. Load and run the DEC/X11 System Exerciser configured to test the number of DPV11s in the system.

Each DEC/X11 CXDPV module will test up to eight consecutively addressed DPV11s.

CXDPV uses a software switch register. Refer to the *DEC/X11 Cross-Reference* (AS-F055C-MC) for switch register utilization.

[†] If a BC26L-25 cable and H3259 turn-around connector are not available, an on-board test connector (H3260) can be ordered separately. See Paragraph 2.5.

The DEC/X11 System Exerciser is designed to achieve maximum contention with all devices that make up the system configuration. It is within this environment that the CXDPV module runs. Its intent is to isolate DPV11s which adversely affect the system operation.

For information on configuring and running the DEC/X11 System Exerciser, refer to *DEC/X11 User Manual* (AS-F0503B-MC) and *DEC-X11 Cross Reference* (AS-F055C-MC).

2.4.2 Connection to External Equipment/Link Testing between ball Second and Johnson The DPV11 is now ready for connection to external equipment. The off no IW requires of T

If the DPV11 is being connected to a synchronous modem, remove the H3259 connector and install the EIA connection of the BC26L-25 cable into the connector on the modem. Of ballous of V


Configure jumpers W1-W28 in accordance with operating requirements (Table 2+1)2 man

Load and run DCLT (CVCLH*) if a full link is available. This will check the final configuration and isolate failures to the CPU, the communications link, or the modem.

If the connection to external equipment uses RS-422-A, the user must provide the cable and test support.

2.5 TEST CONNECTORS

The only test connector provided with the DPV11 is the H3259 turn-around connector (Figure 2-2). Table 2-5 and Figure 2-3 show the relationship between pin numbers, signal names and register bits when the H3259 is connected by means of the BC26L-26 cable to the M8020 module.

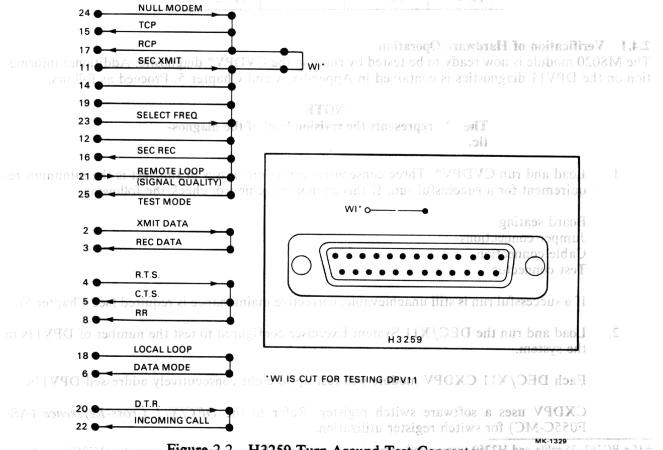

11 a BC261-25 cable and H32 rotsennoo itseT bnuorA-nruT 9258H n (2-2 srugiF connector (H3260) can be as dered separately. See Paragraph of the separately for the sep

From			То		
Signal Name	Pin No. H3259	Pin No. J1	Pin No. J1	Pin No. H3259	Signal Name
SEND DATA	2	F	J	3	RECEIVE DATA
REQUEST TO SEND (RTS) (RXCSR-2)	4	V	BB&T	5&8	CLEAR TO SEND (CTS)(RXCSR-13), RECEIVER READY (RR) (RXCSR-12)
LOCAL LOOPBACK (LL) (RXCSR-3)	18	U	z	6	DATA MODE (DM) (RXCSR-9)
SELECT FREQ/REMOTE LOOPBACK (SF/RL) (RXCSR-0)	23/21	RR/MM	ММ/С	21/25	SIGNAL QUALITY/ TEST MODE (SQ/TM) (PCSCR-5)
NULL MODEM	24	L	N&R	15&17	RCV CLOCK TX CLOCK
DATA TERMINAL READY (DTR) (RXCSR-1)	20	DD	x	22	INCOMING CALL (IC) (RXCSR-14)

Table 2-5 H3259 Test Connections

The following accessories are available for interfacing and may be ordered separately.

- BC26L-X cable. Available in lengths of .3, 1.8, 2.4, 3.0, 3.6, 6.1, and 7.6 meters (1, 6, 8, 10, 12, 20 and 25 feet). When ordering, the dash number indicates the desired cable length in feet; e.g., BC26L-25 or BC26L-1.
- H3259 cable turn-around connector
- H856 Berg connector. Includes H856 Berg connector and 40 pins. Crimping tools are available from:

Berg Electronics, Inc. New Cumberland, PA 17070

• H3260 on-board test connector (includes RS-422-A testing)

The H3260 on-board test connector (Figure 2-4) may be used to test the M8020 circuitry in its entirety. RS-422-A circuitry is not tested with the H3259 cable turn-around connector. The H3260 on-board test connector is shipped configured for testing RS-422-A. It may be configured to test RS-422-A or RS-423-A as follows.


RS-422-A RS-423-A

W1-W2 out	W1-W2
W3-W6 installed	W3-W6

The connector is installed into J1 with the jumper side up.

Since the H3260 on-board test connector does not test the cable, it is recommended that the DPV11 be tested with a turn-around connector at the modem end of the cable if possible.

installed out

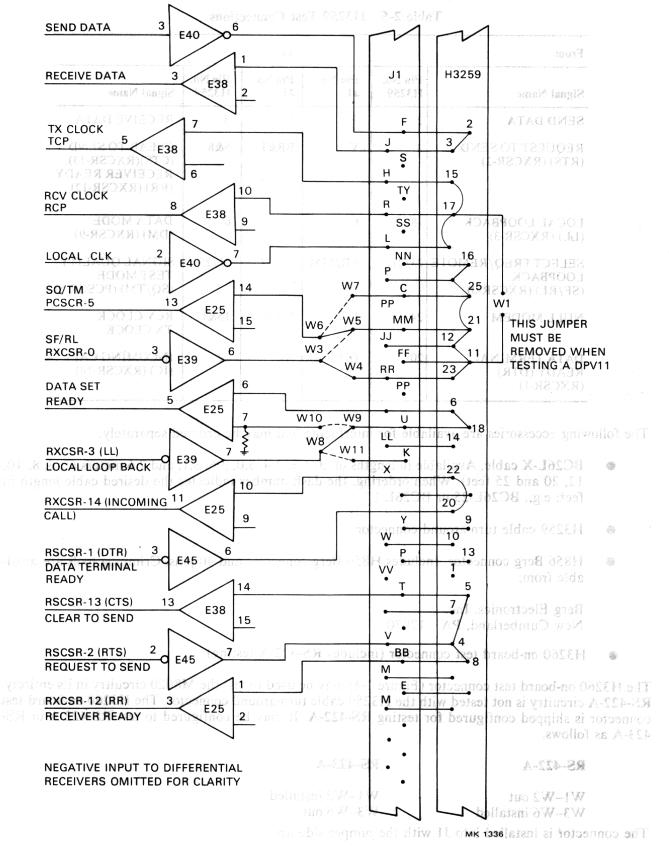

Since the H3260 on boar totsent of the H3259 Test Connection and the DEVIL be tested with a functioned that the DEVIL be

TEST MODE SIGN QUAL SF/RL

SEND DATA RX DATA SEND DATA (RS422) **TERM TIMING** SEND TIMING **RX TIMING TERM TIMING**


CLEAR TO SEND REQ TO SEND RX RDY

INCOMING CALL TERM RDY

DATA MODE DATA MODE RET (LOCAL LOOP)

SEND TIM RET **RX TIM RET** TERM TIM RET (RS422)

SEND DATA RET **RX DATA RET**

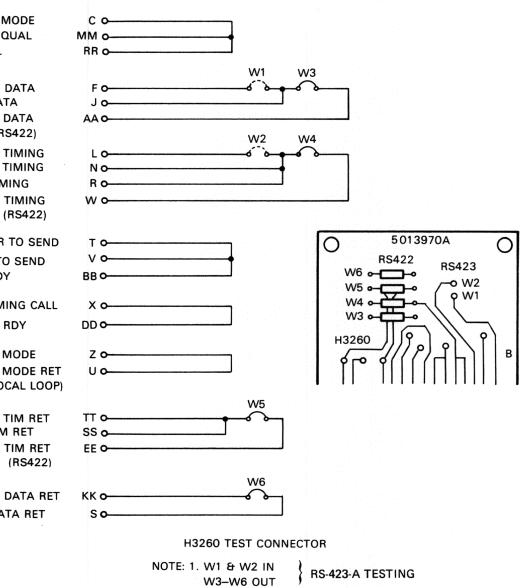

2. W1 & W2 OUT W3-W6 IN

RS-422-A TESTING

MK-1464

Figure 2-4 H3260 On-Board Test Connector

SEND DATA Sector 276 PT and a second second

2010 53400 77551 0851-4

行, "但你的这些我们,是我的好。" "……"我们这些是我们

Figure 2-4 H1150 On Bond Test Competion

CHAPTER 3 REGISTER DESCRIPTIONS AND PROGRAMMING INFORMATION

3.1 INTRODUCTION

This chapter describes the bit assignments and programming considerations for the DPV11. Some typical start and receive sequences for both bit- and character-oriented protocols are included.

3.2 DPV11 REGISTERS AND DEVICE ADDRESSES

The five registers used in the DPV11 are shown in Table 3-1. Note that two of the registers (PCSAR and RDSR) have the same address. This does not constitute a conflict, however, because the PCSAR is a write-only register and the RDSR is a read-only register. These five registers occupy eight contiguous byte addresses which begin on a boundary where the low-order three bits are zero, and can be located anywhere between 160000g and 1777768.

Register Name	Mnemonic	Address	Comments
Receive Control and Status	RXCSR	16xxx0	Word or byte* addressable. Read/write.
Receive Data and Status	RDSR**	16xxx2	Word or byte* addressable. Read-only.
Parameter Control Sync/Address	PCSAR**	16xxx2	Word or byte addressable. Write-only. [†]
Parameter Control and Character Length	PCSCR‡	16xxx4	Word or byte addressable. Read/write.
Transmit Data and Status	TDSR**	16xxx6	Word or byte addressable. Read/write.

Table 3-1 DPV11 Registers

* Reading either byte of these registers, clears data and certain status bits in other bytes. See Paragraphs 3.3.1 and 3.3.2.

** Registers contained within the USYNRT.

[†] It is not possible to do bit set or bit clear instructions on this register.

[‡]The high byte of this register is internal to the USYNRT.

The DPV11 uses a universal-synchronous receiver/transmitter (USYNRT) chip which accounts for a large portion of the DPV11's functionality. The USYNRT provides complete serialization, deserialization and buffering of data to and from the modem.

Most of the DPV11 registers are internal to the USYNRT. Only the receiver control and status register (RXCSR) and the low byte of the parameter control and character length register (PCSCR) are external.

NOTE

When using the special space sequence function, all registers internal to the USYNRT must be written in byte mode.

3.3 REGISTER BIT ASSIGNMENTS

-dos Elgia vausso aistiger avil avail contes

Word or byte addressible:

e retre de la compación de la c

Bit assignments for the five DPV11 registers are shown in Figure 3-1. Paragraphs 3.3.1–3.3.5 provide a description of each register using a bit assignment illustration and an accompanying table with a detailed description of each bit.

3.3.1 Receive Control and Status Register (RXCSR) (Address 16xxx0)

Figure 3-2 shows the format for the receive control and status register (RXCSR). Table 3-2 is a detailed description of the register. This register is external to the USYNRT.

NOTE

mode. However, reading either byte resets certain status bits in both bytes.

3.3.2 Receive Data and Status Register (RDSR) (Address 16xxx2)

Figure 3-3 show the format for the receive data and status register (RDSR). It is a read-only register and shares its address with the parameter control sync/address register (PCSAR) which is write-only. Table 3-3 is a detailed description of the RDSR.

NOTE

The RDSR can be read in either word or byte mode. However, reading either byte resets data and certain status bits in both bytes of this register as well as bits 7 and 10 of the RXCSR.

3.3.3 Parameter Control Sync/Address Register (PCSAR) (Address 16xxx2) The parameter control sync/address register (PCSAR) is a write-only register which can be written in either byte or word mode. Figure 3-4 shows the format and Table 3-4 is a detailed description of the PCSAR. This register shares its address with the RDSR.

NOTE

Bit set (BIS) and bit clear (BIC) instructions cannot be executed on the PCSCR, since they execute and an and an and a manual for the second second

using a read-modify-write sequence.

3.3.4 Parameter Control and Character Length Register (PCSCR) (Address 16xxx4) The parameter control and character length register (PCSCR) can be read from or written into in either word or byte mode. The low byte of this register is external to the USYNRT and the high byte is internal. Figure 3-5 shows the format and Table 3-5 is a detailed description of the PCSCR.

3.3.5 Transmit Data and Status Register (TDSR) (Address 16xxx6)

The format for the transmit data and status register (TDSR) is shown in Figure 3-6 and Table 3-6 is a detailed description. The TDSR is a read/write register which can be accessed in either word or byte mode with no restrictions. All bits can be read from or written into and are reset by Device Reset or Bus INIT except where noted.

tion and buffering of data to and from the modene.

RXCSR 16XXX0 READ/WRITE


15	14	13	12	11	10	09	08	07	06	05	04	03	02	01	00
R	B	R	R	R	R	R	R	R	R/W	R/W	R/W	R/W	R/W	R/W	R/W
ter en a traster de	T			<u> </u>	1							T.		ſ	eren - Enter
DATA SET HANGE	an Artika Artika Artika	CLR TO SEND		RCV ACTIVE		DATA MODE		RCV DATA READY		DATA SET INTR EN		LOCAL (LL) LOOP		DATA TERM RDY	
	CALL	IG	RCVR READY		RCVR STATUS READY		SYNC OR FLAG DETECT		RCV INTR EN		RX ENA		REQ TO SEND		SF/R
OSR 6XXX	2 ONLY	,													MK-1
15	14		12	11	10	09	08	07							00
	A	SSEMB	LED	n forer tersamler sam					I	REC	T EIVE D	T ATA BU	T FFER		1
PCSA 16XX WRIT	R	LY		OVER RUN	RCV ABORT	OF MESG	START OF MESG								
15	14	13	12	11	10	09	08	07							00
						R DETE			SECON	I NDARY S	T STATIOI	N + 1	RECEIVE	ER SYN	
<u> </u>	·	·		IDLE											

Figure 3-1 DPV11 Register Configurations and Bit Assignments (Sheet 1 of 2)

3-3

PCSAR 16XXX4 READ/WRITE

AAUSA T6XXXO READ/WRITE

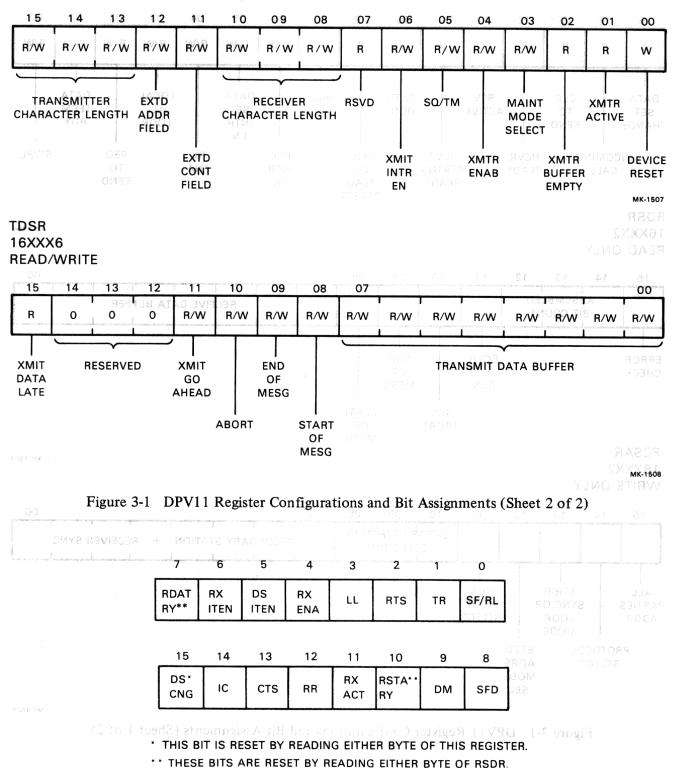

MK-1327

Figure 3-2 Receive Control and Status Register (RXCSR) Format

3-4

Bit	Name	Description
15	Data Set Change (DSCNG)	This bit is set when a transition occurs on any of the following modem control lines:
	utella andre estada de ca 1980 De many estada en 1910 (1990), alta sectore 1910 (1990), alta sectore 1910 (1990), alta sectore 1910 (1990), alta sectore	Clear to Send Data Mode Receiver Ready Incoming Call
	n par sportestin a dib y ras	Transition detectors for each of these four lines can be disabled by removing the associated jumper.
	eseli an colli più de la Persia Persia	Data Set Change is cleared by reading either byte of the RXCSR or by Device Reset or Bus INIT.
	n an thain an the training the Line of the state of the s	Data Set Change causes a receive interrupt if DSITEN (bit 5) and RXITEN (bit 6) are both set.
14	Incoming Call (IC)	This bit reflects the state of the modem Incoming Call line. Any transition of this bit causes Data Set Change bit (bit 15) to be asserted unless the Incoming Call line is disabled by removing its jumper. This bit is read-only and cannot be cleared by soft- ware.
13 	Clear to Send (CTS)	This bit reflects the state of the Clear to Send line of the modem. Any transition of this line causes Data Set Change (bit 15) to be set unless the jumper enabling the Clear to Send signal is removed.
		Clear to Send is a program read-only bit and cannot be cleared by software.
12	Receiver Ready (RR)	This bit is a direct reflection of modem Receiver Ready lead. It indicates that the modem is receiving a carrier signal. For exter- nal maintenance loopback, this signal must be high. If the line is open, RR is pulled high by the circuitry.
		Any transition of this bit causes Data Set Change (bit 15) to be asserted unless the jumper enabling the Receiver Ready signal is removed.
	a de la contaca (com 6.24 Postorio (Ara-66	Receiver Ready is a read-only bit and cannot be cleared by soft- ware.
11 11	Receiver Active (RXACT)	This bit is set when the USYNRT presents the first character of a message to the DPV11. It remains set until the receive data path of the USYNRT becomes idle.
	i selan da ber da och prem Donationalisticker i selation asso	Receiver Active is cleared by any of the following conditions: a terminating control character is received in bit-oriented protocol mode; an off transition of Receiver Enable (RXENA) occurs; or Device Reset or Bus INIT is issued.

Table 3-2 Receive Control and Status Register (RXCSR) Bit Assignments

Table 3-2	Receive	Control a	and Status	Register ((RXCSR)) Bit	Assignments ((Cont)
-----------	---------	-----------	------------	------------	---------	-------	---------------	--------


Bit	Name	Description
1,15 (% r ()	8-8 all ferter un same com	Receiver Active is a read-only bit which reflects the state of the USYNRT output pin 5.
10	Receiver Status Ready (RSTARY)	This bit indicates the availability of status information in the upper byte of the receive data and status register (RDSR). It is set when any of the following bits of the RDSR are set: Receiver End of Message (REOM); Receiver Overrun (RCV OVRUN); Receiver Abort or Go Ahead (RABORT); Error Check (ERRCHK) if VRC is selected.
	ange ander ange ander ange ange ange ange ange ange ange ange	Receiver Status is cleared by any of the following conditions: reading either byte of the RDSR; clearing Receiver Enable (bit 4 of RXCSR); Device Reset, or Bus Init.
	가 가 가 가 가 가 가 가 가 가 가 가 가 가 가 가 가 가 가	When set, Receiver Status Ready causes a receive interrupt if Receive Interrupt Enable (bit 6) is also set.
	Ani No ego metal ususar s Ro Vicoto excerticosi eco	Receiver Status Ready is a read-only bit which reflects the state of USYNRT pin 7.
9 (1289) 19 (128) 19 (128)	Data Mode (DM) (Data Set Ready)	This bit reflects the state of the Data Mode signal from the modem.
6413 (% 1977 (#	anda dinaka na saga sa sa Na 1944 na na sa na saga	When this bit is set it indicates that the modem is powered on and not in test, talk or dial mode.
in van Lee oor	seae a methologebook Lodigoace oo chore	Any transition of this bit causes the Data Set Change bit (bit 15) to be asserted unless the Data Mode jumper has been removed.
		Data Mode is a read-only bit and cannot be cleared by software.
19 - 27 8 - 59 - 57 29 - 59 - 57 29 - 59 - 57 29 - 57 20 - 57 20 20 - 57 20 20 - 57 20 20 - 57 20 20 - 57 20 20 - 57 20 20 - 5	Sync or Flag Detect (SFD)	This bit is set for one clock time when a flag character is de- tected with bit-oriented protocols, or a sync character is de- tected with character-oriented protocols.
tan sati Katata	n El Alfridga d'Al concentra a Ana Managana de Cara a ser	SFD is a read-only bit which reflects the state of USYNRT pin 4.
7 	Receive Data Ready (RDATRY)	This bit indicates that the USYNRT has assembled a data char- acter and is ready to present it to the processor.
	analizio erefficiale derozoare o di General orde o el occazellario	If this bit becomes set while Receiver Interrupt Enable (bit 6) is set, a receive interrupt request will result.
	a Ales averte a faloring contra	Receive Data Ready is reset when either byte of RDSR is read, Receiver Enable (bit 4) is cleared, or Device Reset or Bus INIT is issued.
ena polegen recto polejen	u, adom na seu cou 200 H. De la Baseu EXIII, NUEC VIII da	RDATRY is a read-only bit which reflectes the state of US- YNRT pin 6.

Bit	Name	Description				
6 Receiver Interrupt Enable (RXITEN)		When set, this bit allows interrupt requests to be made to the receiver vector whenever RDATRY (bit 7) becomes set.				
	 A spike constant automotion film A spike c	The conditions which cause the interrupt request are the asser- tion of Receive Data Ready (bit 7), Receive Status Ready (bit 10), or Data Set Change (bit 15) if DSITEN (bit 5) is also set.				
		RXITEN is a program read/write bit and is cleared by Device Reset or Bus INIT.				
5	Data Set Interrupt Enable (DSITEN)	This bit, when set along with RXITEN, allows interrupt requests to be made to the receiver vector whenever Data Set Change (bit 15) becomes set.				
	ud um estis of specifications between The contract of the second operations of the second s	DSITEN is a program read/write bit and is cleared by Device Reset or Bus INIT.				
4	Receiver Enable (RXENA)	This bit controls the operation of the receive section of the US- YNRT.				
		When this bit is set, the receive section of the USYNRT is enabled. When it is reset the receive section is disabled.				
		In addition to disabling the receive section of the USYNRT, re- setting bit 4 reinitializes all but two of the USYNRT receive registers. The two registers not reinitialized are the character length selection buffer and the parameter control register.				
3	Local Loopback (LL)	Asserting this bit causes the modem connected to the DPV11 to establish a data loopback test condition.				
		Clearing this bit restores normal modem operation.				
	en e	Local Loopback is program read/write and is cleared by Device Reset or Bus request to Send is program read/write and is cleared by Device Reset or Bus INIT.				
2	Request to Send (RTS)	Setting this bit asserts the Request to Send signal at the modem interface.				
	가는 가는 것이 있는 것이 있다. 2014년 1월 19일 - 19일 - 2017년 1월 19일 - 1 2017년 1월 19일 - 19 2017년 1월 19일 - 1 2017년 1월 19일 - 193	Request to Send is program read/write and is cleared by Device Reset or Bus INIT.				
1 - 100 - 10	Terminal Ready (TR) (Data Terminal	When set, this bit asserts the Terminal Ready signal to the modem interface.				
	Ready)	For auto dial and manual call origination, it maintains the estab- lished call. For auto answer, it allows handshaking in response to a Ring signal.				

Table 3-2 Receive Control and Status Register (RXCSR) Bit Assignments (Cont)

Bit	Name	Description					
0	Select Frequency or Remote Loopback (SF/RL)	This bit can be wire-wrap jumpered to function as either select frequency or remote loopback. When jumpered as select fre- quency (W3 to W4), setting this bit selects the modem's higher frequency band for transmission to the line and the lower fre- quency band for reception from the line. The clear condition se- lects the lower frequency for transmission and the higher fre- quency for reception.					
		When jumpered for remote loopback (W5 to W3), this bit, when asserted, causes the modem connected to the DPV11 to signal when a remote loopback test condition has been established in the remote modem. SF/RL is program read/write and is cleared by Device Reset or					

Table 3-2	Receive Control	and Status	Register (RXCS	R) Bit Assignments (Cont)
-----------	------------------------	------------	-----------------------	---------------------------



	15	14	13	12	11	10	9	8
Contraction of the International Contractional Contract	ERR CHK		SSEMBL	.ED IT	REC OVRUN	ABORT	REOM	RSOM

MK-1326

Figure 3-3 Receive Data and Status Register (RDSR) Format

Table 3-3 Receive Data and Sta	us Register (RDSR) Bit Assignments
--	-------------------	-------------------

Bit	Name	Description
15	Error Check (ERR CHK)	This bit when set, indicates a possible error. It is used in con- junction with the error detection selection bits of the parameter control sync/address register (bits 8-10) to indicate either an error or an all zeros state of the CRC register.
		With bit-oriented protocols, ERR CHK indicates that a CRC error has occurred. It is set when the Receive End of Message bit (RDSR bit 9) is set.
63		With character-oriented protocols ERR CHK is asserted with each data character if all zeros are in the CRC register. The processor must then determine if this indicates an error-free

Table 3-3 Receive Data and Status Register (RDSR) Bit Assignments (Cont)

Bit	Name	Description
		message or not. If VRC parity is selected, this bit is set for every character which has a parity error.
		ERR CHK is cleared by reading the RDSR, clearing RXENA (RXCSR bit 4), Device Reset or Bus INIT.
14–12	Assembled Bit Count (ABC)	Used only with bit-oriented protocols, these bits represent th number of valid bits in the last character of a message. They ar all zeros unless the message ends on an unstated boundary. Th bits are encoded to represent valid bits as shown below.
		14 13 12 Number of Valid Bits
		0 0 0 All bits are valid
	· 이상 · · · · · · · · · · · · · · · · · ·	0 0 1 One valid bit
		0 1 0 Two valid bits
		0 1 1 Three valid bits
		1 0 0 Four valid bits
		1 0 1 Five valid bits
		1 1 0 Six valid bits
		1 1 1 Seven valid bits
		These bits are presented simultaneously with the last bits data and are cleared by reading the RDSR or by resettin RXENA (bit 4 of RXCSR).
11	Receiver Overrun (RCV OVRUN)	This bit is used to indicate that an overrun situation has o curred. Overrun exists when the data buffer (bits 0-7 of RDSI has not been serviced within one character time.
		As a general rule, the overrun is indicated when the last bit the current character has been received into the shift register the USYNRT and the data buffer is not yet available for a ne character.
		Two factors exist which modify this general rule and apply on to bit-oriented protocols.
		The first factor is the number of bits inserted into the da stream for transparency. For each bit inserted during the for matting of the current character, the controller's maximum r sponse time is increased by one clock cycle.
		The second factor is the result of termination of the current message. When this occurs, the data of the terminated messa which is within the USYNRT is not overrunable. If an attem is made to displace this data by the reception of a subseque message, the data of the subsequent message is lost until t data of the prior message has been released.

Bit	Name	Description
10	Receiver Abort or Go Ahead (RABORT)	This bit is used only with bit-oriented protocols and indicates that either an abort character or a go-ahead character has been received. This is determined by the Loop Mode bit (PCSAR bi 13). If the Loop Mode bit is clear, RABORT indicates reception of an abort character. If the Loop Mode bit is set, RABORT indicates a go-ahead character has been received.
	1999年の第三日本の新知道の 「「「「「「「「「」」」の「「「」」 「「「」」」」の「「」」の「「」」」。 「」」」の目示していた。」の「」」の「」」	The setting of RABORT causes Receiver Status Ready (bit 10 of RXCSR) to be set.
	e d'Attantion de Autor	RABORT is reset when the RDSR is read or when Receiver Enable (bit 4 of RXCSR) is reset.
		The abort character is defined to be seven or more contiguous one bits appearing in the data stream. Reception of this bit pat- tern when Loop Mode is clear causes the receive section of the USYNRT to stop receiving and set RSTARY (bit 10 of RXCSR). The abort character indicates abnormal termination of the current message.
	an Bhaile an an an an an an an an an an Bhaile an	The go-ahead character is defined as a zero bit followed by sev- en consecutive one bits. This character is recognized as a normal terminating control character when the Loop Mode bit is set. If Loop Mode is cleared this character is interpreted as an abort character.
	Receiver End of Message (REOM)	This bit is used only with bit-oriented protocols and is asserted if Receiver Active (bit 11 of RXCSR) is set and a message is ter- minated either normally or abnormally. When REOM becomes set, it sets RSTARY (bit 10 of RXCSR).
		REOM is cleared when RDSR is read or when Receive Enable (bit 4 of RXCSR) is reset.
	Receiver Start of Message (RSOM)	Used only with bit-oriented protocols. This bit is presented to the processor along with the first data character of a message and is synchronized to the last received flag character. Setting of RSOM does not set RSTARY (RXCSR bit 10).
anta Santa da	ante a diferencia de la composición de	RSOM is cleared by Device Reset, Bus INIT, resetting Re- ceiver Enable (RXCSR bit 4), or the next transfer into the Re- ceive Data buffer (low byte of RDSR).
-0	Receive Data Buffer	The low byte of the RDSR is the Receive Data buffer. The se- rial data input to the USYNRT is assembled and transferred to the low byte of the RDSR for presentation to the processor. When the RDSR receives data, Receive Data Ready (bit 7 of RXCSR) becomes set to indicate that the RDSR has data to be picked up. If this data is not read within one character time, a data overrun occurs.
		The characters in the Receive Data buffer are right-justified with bit 0 being the least significant bit.

Table 3-3 Receive Data and Status Register (RDSR) Bit Assignments (Cont)

7 6 5 4 3 2 1 0

SYNC CHA	RACTER OR	I I		
SECONDAR	RY STATION	ADDRESS	e in an i	e a general de las

	15	14		12	11	10	9	8
Γ	ΑΡΑ	PROT SEL	STRIP SYNC	SEC ADR MDE	IDLE	ER	R DET S	EL I
			n dentre La constante La constante					MK-13

MK-1330

Figure	3-4	Parameter	Control Sync/Address Register (PCSAR) Format	
			- 1997年の日本の記録の「「「「「「「」」」「「」」」	
bla 2 4	Dor	amotor Con	tral Suma / Address Desister (DCSAD) Dit Assignments	

	MK-1330
Figure 3-4	Parameter Control Sync/Address Register (PCSAR) Format
Table 3-4 Pa	rameter Control Sync/Address Register (PCSAR) Bit Assignments

Bit	Name	Description
15	All Parties Addressed (APA)	This bit is set when automatic recognition of the All Parties Addressed character is desired. The All Parties Addressed character is eight bits of ones with necessary bit stuffing so as not to be confused with the abort character.
		Recognition of this character is done in the same way as the sec- ondary station address (see bit 12 of this register) except that the broadcast address is essentially hardwired within the receive data path. The logic inspects the address character of each frame for the broadcast address. When the broadcast address is recognized, the USYNRT makes it available and sets Receiver Start of Message (bit 8 of RDSR).
	e aan too Alban Too an too Alban Albana ay ahaa	If the broadcast address is not recognized, one of two possible actions occurs.
a je vlagit i		1. If the Secondary Address Select mode bit (bit 12) is set, a test of the secondary station address is made.
		2. If bit 12 is not set or the secondary station address is not recognized, the receive section of the USYNRT renews its search for synchronizing control characters.
14	Protocol Select (PROT SEL)	This bit is used to select between character- and byte count-ori- ented or bit-oriented protocols. It is set for character- and byte count-oriented protocols and reset for bit-oriented protocols.
13	Strip Sync or	This bit serves the following two functions.
	Loop Mode (STRIP SYNC)	1. Strip Sync (character-oriented protocols) – In character-oriented protocols, all sync characters after the initial synchro- nization are deleted from the message and not included in the
an an Anna Anna Anna Anna Anna Anna Anna Anna		CRC computation if this bit is set. If it is cleared, all sync char- acters remain in the message and are included in the CRC com- putation.

Table 3-4 Parameter Control Sync/Address Register (PCSAR) Bit Assignments (Cont)

Bit	Name	Description
		2. Loop Mode (bit-oriented protocols) – With bit-oriented pro- tocols, this bit is used to control the method of termination. If it is set, either a flag or go-ahead character can cause a normal termination of a message. If it is cleared, only a flag character can cause a normal termination.
12	Secondary Address Mode (SEC ADR MDE)	This bit is used with bit-oriented protocols when automatic rec- ognition of the secondary station address is desired. If it is set, the station address of the incoming message is compared with the address stored in the low byte of this register. Only messages prefixed with the correct secondary address are presented to the processor. If the addresses do not compare, the receive section of the USYNRT goes back to searching for flag or go-ahead characters.
		When SEC ADR MDE is cleared, the receive section of the USYNRT recognizes all incoming messages.
11	Idle Mode Select (IDLE)	This bit is used with both bit- and character-oriented protocols.
		With bit-oriented protocols, IDLE is used to select the type of control character issued when either Transmit Abort (bit 10 of TDSR) is set or a data underrun error occurs. If IDLE is set, flag characters are issued. If IDLE is clear, abort characters are issued.
		With character-oriented protocols, IDLE is used to control the method in which initial sync characters are transmitted and the action of the transmit section of the USYNRT when an under- run error occurs. IDLE is cleared to cause sync characters from the low byte of PCSAR to be transmitted. When IDLE is set, the transmit data output is held asserted during an underrun er- ror and at the end of a message.
10–8	Error Detection Selection (ERR DEL SEL)	These bits are used to determine the type of error detection used on received and transmitted messages. In bit-oriented protocols, the selection is independent of character length. In character- and byte count-oriented protocols, CRC error detection is us- able only with 8-bit character lengths. The maximum character length for VRC is seven. The bits are encoded as follows.
		10 9 8 CRC Polynomial
	agen en transport 2013 - Alf Arreng, Son (2017) 2014 - Nortffren Phones, Son (2017) 2014 - Norte Arreng, Son (2017)	0 0 0 $x^{16}+x^{12}+x^5+1$ (CRC CCITT) (Both CRC data registers in the transmit and receive sections are set to all ones prior to the computation.)
	a se la constance de la serie de la se La serie de la s	0 0 1 $x^{16}+x^{12}+x^5+1$ (CRC CCITT) (Both CRC data registers set to all zeros.)

Name	Description	gelegenter en
	0 1 0	Not used
	0 1 1	$x^{16}+x^{15}+x^2+1$ (CRC 16) (Both CRC registers set to all zeros.)
	1 0 0	Odd VRC Parity (A parity bit is attached to each transmitted character.) Should be used only in character-oriented protocols.
	1 0 1	Even VRC parity (Resembles odd VRC except that an even number of bits are generated.)
	1 1 0	Not used.
	$\frac{1}{1} \left\{ \sqrt{1} \right\} = 1$	All error detection is inhibited.
Sync Character or Secondary Address	character-orier for bit-oriented	of PCSAR is used as either the sync character for need protocols or as the secondary station address protocols.
	Sync Character or Secondary	010011100101101110111111111111111111111Sync Character or Secondary AddressThe low byte of character-orient for bit-oriented

Table 3-4 Parameter Control Sync/Address Register (PCSAR) Bit Assignments (Cont)

EXTERNAL TO THE USYNRT

7	6	5	4	3	2	1	0
RSVD	TX INT EN	SQ/TM	TXENA	MM SEL	ТВ ЕМТҮ	тхаст	RESET

INTERNAL TO THE USYNRT

15	14	13	12	11	10	9	8
TRANS	MITTER	NGTH	EXADD	EXCON	RECEIVE	ER CTER L	ENGTH

MK-1325

.

Figure 3-5 Parameter Control and Character Length Register (PCSCR) Format

Bit	Name	Description exclusion cannot a cannot a						
15–13	Transmitter Character Length	These bits can be read or written and are used to determine th length of the characters to be transmitted.						
~ <u>~ 1호</u> 전함	가 가 있는 것 같아요. 가 가지 않는 것 같아요. 가 있는 것 같아. 아파 가 있는 것 같아. 아파 가 있는 것 같아.	They are encoded to set up character lengths as follows.						
	ala a në përe 1 e et Fatadë detremit të	15 14 13 Character Length						
	istoort og dat elteret	0 0 0 Eight bits per character						
	建築 建静脉 无法法法法理解释 化合物 化合物 化精膜 化合物化物化合物	1 1 1 Seven bits per character						
		1 1 0 Six bits per character						
	. Baidele versef:	1 0 1 Five bits per character (bit-oriented protocol only)						
nol nix sensitio	unada ang salam dinasa. Caditat galamang at m	1 0 0 Four bits per character (bit-oriented protocol only)						
	n diff de and langes participad	0 1 1 Three bits per character (bit-oriented protocol only)						
n magagan dan Konstan (Konst		0 1 0 Two bits per character (bit-oriented protocol only)						
		0 0 1 One bit per character (bit-oriented protocol only)						
		These bits can be changed while the transmitter is active, in which case the new character length is assumed at the com- pletion of the current character. This field is set to a character length of eight by Device Reset or Bus INIT. When VRC error detection is selected, the default character length is eight bits plus parity.						
12	Extended Address Field (EXADD)	This bit is used with bit-oriented protocols and affects the ad- dress portion of a message in receiver operations. When it is set, each address byte is tested for a one in the least significant bit position. If the least significant bit is zero, the next character is an extension of the address field. If the least significant bit is one, the current character terminates the address field and the next character is a control character.						
		EXADD is not used with Secondary Address Mode (bit 12 of PCSAR).						
		EXADD is read/write and is reset by Device Reset or Bus INIT.						
1	Extended Control Field (EXCON)	This bit is used with bit-oriented protocols and affects the con- trol character of a message in receiver operations. When EX-						

Table 3-5 Parameter Control and Character Length Register (PCSCR) Bit Assignments

Table 3-5 Parameter Control and Character Length Register (PCSCR) Bit Assignments (Cont)

Bit	Name	Description				
		CON is set it extends the control field from one 8-bit byte to two 8-bit bytes.				
	n on an an an an an an an an an 1973 an Saintean Charles Tarrethan 1997 (1976)	EXCON is not used with Secondary Address Mode (bit 12 of PCSAR)				
		EXCON is read/write and is reset by Device Reset or Bus INIT.				
10–8	Receiver Character Length	These bits are used to determine the length of the characters to be received.				
	· 通行 · 正 · 1、 · · · · · · · · · · · · · · · · ·	They are encoded to set up character lengths as follows.				
	n ann an 1990 ann an Airtean 1986 - Calin Corresto ann an Airtean 1986 - Calina Anna Airtean Anna Airtean	10 9 8 Character Length				
		0 0 0 Eight bits per character				
		1 1 1 Seven bits per character				
		1 1 0 Six bits per character				
		1 0 1 Five bits per character				
		1 0 0 Four bits per character (bit-oriented protocols only)				
		0 1 1 Three bits per character (bit-oriented proto cols only)				
		0 1 0 Two bits per character (bit-oriented protocols only)				
		0 0 1 One bit per character (bit-oriented protocols only)				
7	Reserved	Not used by the DPV11				
6	Transmit Interrupt Enable (TXINTEN					
5	Signal Quality or Test Mode (SQ/TI	M) This bit can be wire-wrap jumpered to function as either Signa Quality or Test Mode.				
		When jumpered for signal quality (W5 to W6), this bit reflect the state of the signal quality line from the modem. When as serted, it indicates that there is a low probability of errors in the received data. When clear it indicates that there is a high proba- bility of errors in the received data.				

Table 3-5 Parameter Control and Character Length Register (PCSCR) Bit Assignments (Cont)

Bit	Name	Description
		When jumpered for the test mode (W6 to W7), this bit indicates that the modem has been placed in a test condition when as- serted. The modem test condition could be established by assert- ing Local Loophack (bit 3 of BYCSB). Bernste Loophack (bit 3
	이 이 일반 동생은 이 가지 않을 수가가 가지 않을 것을 가지 않는다. 이 이 일반 동생은 이 가지 않을 수가가 가지 않는다.	ing Local Loopback (bit 3 of RXCSR), Remote Loopback (bit 0 of RXCSR) or other means external to the DPV11.
	an i santa por estas.	When SQ/TM is clear, it indicates that the modem is not in test mode and is available for normal operation.
	ali en la agua se sa	SQ/TM is program read-only and cannot be cleared by soft-ware.
4	Transmitter Enable (TXENA)	This bit must be set to initiate the transmission of data or con- trol information. When this bit is cleared, the transmitter will revert back to the mark state once all indicated sequences have been completed. TXENA should be cleared after the last data character has been loaded into the transmit data and status reg- ister (TDSR). Transmit End of Message (bit 9 of TDSR) should be asserted when TXENA is reset (if it is to be asserted at all) and remain asserted until the transmitter enters the idle mode. TXENA is connected directly to USYNRT pin 37. It is a read/write bit and is reset by Device Reset or Bus INIT.
3 4000000 - 100000 - 100000	Maintenance Mode Select (MM SEL)	When this bit is asserted, it causes the USYNRT's serial output to be internally connected to the USYNRT's serial input. The serial send data output line from the interface is asserted and the receive data serial input is disabled. Send timing and receive timing to the USYNRT are disabled and replaced with a clock signal generated on the interface. The clock rate is either 49.152K b/s or 1.9661K b/s depending on the position of a jumper on the interface board.
Acco	.uc. whather the ¹ store time	Maintenance mode allows diagnostics to run in loopback with- out disconnecting the modem cable.
		MM SEL is a read/write bit and is cleared by Device Reset or Bus INIT. When it is cleared, the interface is set for normal operation.
2	Transmitter Buffer Empty (TBEMTY)	This bit is asserted when the transmit data and status register (TDSR) is available for new data or control information. It is also set after a Device Reset or Bus INIT.
	ndro o adanar o ton qr	The TDSR should be loaded only in response to TBEMTY being set. When the TDSR is written into, TBEMTY is cleared.
in multar National de la composition	an air carl a bhairtean A naisinn càr an shi	If TBEMTY becomes set while Transmit Interrupt Enable (bit 6 of PCSCR) is set, a transmit interrupt request results.
nde stille Seletene	ore songräftelm, en balv. Rid av en en britter versonder	TBEMTY reflects the state of USYNRT pin 35.

Table 3-5 Parameter Control and Character Length Register (PCSCR) Bit Assignments (Cont)

Bit	Name	Description	
1	Transmitter Active (TXACT)	This bit indicates the state of the tra YNRT. It becomes set when the first trol information is transmitted.	ansmit section of the US- character of data or con-
	n essa part das se di Torra se des references	TXACT is cleared when the transmit when Device Reset or Bus INIT is iss	ter has nothing to send or sued.
		TXACT reflects the state of USYNR	RT pin 34.
0	Device Reset (RESET)	When a one is written to this bit all co are initialized. It performs the same f respect to this interface. Modem Sta Send, Receiver Ready, Incoming Ca Mode) is not affected. RESET is wri- by software.	unction as Bus INIT with tus (Data Mode, Clear to ll, Signal Quality or Test

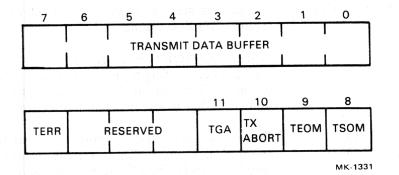


Figure 3-6 Transmit Data and Status Register (TDSR) Format

Table 3-6 Transmit Data and Status Register (TDSR) Bit Assignments

Bit	Name	Description
15	Transmitter Error (TERR)	This is a read-only bit which becomes asserted when the Trans- mitter Buffer Empty (TBEMTY) indication has not been ser- viced for more than one character time.
		When TERR occurs in bit-oriented protocols, the transmit sec- tion of the USYNRT generates an abort or flag character based on the state of the IDLE bit (PCSAR bit 11). If IDLE is set, a flag character is sent. If it is reset, an abort character is sent.
		When TERR occurs in character-oriented protocols, the state of the IDLE bit again determines the result. If IDLE is set, the transmit serial output is held in the MARK condition. If it is cleared, a sync character is transmitted.

Table 3-6 Transmit Data and Status Register (TDSR) Bit Assignments (Cont)

Bit	Name	Description
n di kun di k	t a ana ing tang tang tang tang tang <u>tan</u> uning tang tang tang tang tang ta ta	TERR is cleared when TSOM (TDSR bit 8) becomes set or by Device Reset or Bus INIT.
	al grant to order and the second s	Clearing Transmitter Enable (PCSCR bit 4) does not clear TERR and TERR is not set with Transmit End of Message.
14–12	Reserved	Not used by the DPV11
	Transmit Go Ahead (TGA)	This bit, when asserted, modifies the bit pattern of the control character initiated by either Transmit Start of Message (TSOM) or Transmit End of Message (TEOM). TSOM or TEOM normally causes a flag character to be sent. If TGA is set, a go-ahead character is sent in place of the flag character.
		TGA is only used with bit-oriented protocols.
10	Transmit Abort (TXABORT)	This bit is used only with bit-oriented protocols to abnormally terminate a message or to transmit filler information used to es- tablish data link timing.
		When TXABORT is asserted, the transmitter automatically transmits either flag or abort characters depending on the state of the IDLE mode bit. If IDLE is cleared, abort characters are sent. If IDLE is set, flag characters are sent.
9	Transmit End of Message (TEOM)	This control bit is used to normally terminate a message in bit- oriented protocol. It also terminates a message in character-ori- ented protocols when CRC error detection is used. As a second- ary function, it is used in conjunction with the Transmit Start of Message (TSOM) bit to transmit a SPACE SEQUENCE. Re- fer to the TSOM bit description (bit 8 of this register) for infor- mation regarding this sequence.
	e generalisti (2003) Solari Solari	With bit-oriented protocols, asserting this bit causes the CRC information to be transmitted, if CRC is enabled, followed by flag or go-ahead characters depending on the state of the Transmit Go Ahead (TGA) bit. See bit 11 of this register.
n an an Suite an An Suite an Suite an		With character-oriented protocols, asserting this bit causes CRC information, if CRC is enabled, to be transmitted followed by either sync characters or a MARK condition depending on the state of the IDLE bit. If IDLE is cleared, sync characters are transmitted.
ne one en order onder Standard of the standard of the standard of the standard of the standard of the standard Standard of the standard of the	e de la company d'in La description de la company La company de la description	The character following the CRC information is repeated until the transmitter is disabled or the TEOM bit is cleared.
udi (1993) Nagolia	a da antena da da antena da A cura da Rija da Rija Renamente	A subsequent message may be initiated while the transmit sec- tion of the USYNRT is active. This is accomplished by clearing the TEOM bit and supplying new message data without setting

Table 3-6 Transmit Data and Status Register (TDSR) Bit Assignments (Cont)

Bit	Name	Description
	 ・・・・・・・・・・・・・・・・・・・・・・・・・・・・・	the Transmit Start Of Message bit. However, the CRC charac- ter for the prior message must have completed transmission.
8	Transmit Start of Message (TSOM)	This bit is used with either bit- or character-oriented protocols. As long as it remains asserted, flag characters (bit-oriented pro- tocols) or sync characters (character-oriented protocols) are transmitted.
	ander Son	With bit-oriented protocols, a space sequence (byte mode only) of 16 zero bits can be transmitted by asserting TSOM and TEOM simultaneously provided the transmitter is in the idle state and Transmit Enable is cleared. This should not be done during the transfer of data, and must only be done in byte mode.
u, saise Nu vaise	ang nan kayan sa mini jaké a Kang ngang ang Kangan Ka	NOTE When using the special space sequence function, all registers in- ternal to the USYNRT must be written in byte mode.
		Normally at the completion of each sync, flag, go-ahead on Abort character, the TBEMTY indication is asserted. This al- lows the software to count the number of transmitted charac- ters. In certain applications, the software may elect to ignore the service of the Transmitter Buffer Empty (TBEMTY) indication Normally during data transfers, this would cause a transmit data late error. The TSOM bit asserted suppresses this error and provides the necessary synchronization to automatically transmit another flag, go-ahead or sync character.
7–0	Transmit Data Buffer	Data from the processor to be transmitted on the serial output line is loaded into this byte of the TDSR when Transmitter Buf fer Empty (TBEMTY) is asserted. If the transmitter buffer is not loaded within one character time, an underrun error occurs The characters are right-justified, with bit 0 being the least sig nificant bit.

3.4 DATA TRANSFERS

Paragraphs 3.4.1 and 3.4.2 discuss receive and transmit data transfers as they relate to the system software.

3.4.1 Receive Data

Serial data to be presented to the DPV11 from the modem enters the receiver circuit and is presented to the USYNRT. Recognition by the USYNRT of a control character initiates the transfer. When a transfer has been initiated, a character is assembled by the USYNRT and then placed in the low byte of the receive data and status register (RDSR) when it is available. If the RDSR is not available, the transfer is delayed until the previous character has been serviced. This must take place before the next character is fully assembled or an overrun error exists. Refer to the description of bit 11 in Table 3-3 for more details on Receiver Overrun. Servicing of the RDSR is the responsibility of the system software in response to the Receive Data Ready (RDATRY) signal. This signal is asserted when a character has been transferred to the RDSR. The setting of RDATRY would also cause a receive interrupt request if Receive Interrupt Enable (RXITEN) is set. The software's response to RDATRY is to read the contents of the RDSR. At the completion of this operation, the new information is loaded into the RDSR and RDATRY is reasserted. This operation continues until terminated by some control character. The upper byte of the RDSR contains status and error indications which the software can also read.

The DPV11 will handle data in bit-, byte count- or character-oriented protocols.

With bit-oriented protocol, only flag characters are used to initiate the transfer of a message. Information inserted into the data stream for transparency or control is deleted before it is presented to the RDSR. This means that only data characters are available to the software. The first two characters of every message or frame are defined to be 8-bit characters and the USYNRT will handle them as such regardless of the programmed character length. All subsequent data is formatted in the selected character length. When CRC error detection is selected, the received CRC check characters are not presented to the software, but the error indication will be presented if an error has been detected.

If the secondary address mode is implemented, the first received data character must be the selected address. If this is not the case, the USYNRT will renew its search for flag or go-ahead characters. Refer to the description of bit 12 of the PCSAR in Table 3-4.

With byte count- or character-oriented protocols, two consecutive sync characters are required to synchronize the transfer of data. The sync characters used in the message must be the same as the sync character loaded by the software into the low byte of the parameter control sync/address register (PCSAR). If leading sync characters subsequent to the initial two syncs are to be deleted from the data stream, the Strip Sync bit (bit 13) must also be set in the upper byte of the PCSAR. The character length of the data to be received should also be set in bits 8, 9, and 10 of the parameter control and character length register (PCSCR). Sync characters and data must have the same character length and only characters of the selected length will be presented to the receive buffer. Sync characters following the initial two will be presented to the buffer and included in the CRC computation unless the Strip Sync bit is set. If vertical redundancy check (VRC) parity checking is selected, the parity bit itself is deleted from the character before it is presented to the buffer.

3.4.2 Transmit Data

System software loads information to be transmitted to the modem into the transmit data and status register (TDSR). This does not ordinarily include error detection or control character information. Loading of the TDSR occurs in response to the Transmitter Buffer Empty (TBEMTY) signal from the USYNRT. The character length of information to be transmitted is established by the software when it loads the transmit character length register (bits 13, 14, and 15 of the PCSCR). The default length of eight is assigned when the transmit character length register equals zero. The length of characters presented to the TDSR should not exceed the assigned character length. When the information in the TDSR is transmitted, the TBEMTY signal is again asserted to request another character. The setting of TBEMTY also causes a transmit interrupt request if Transmit Interrupt Enable is set.

Byte count- or character-oriented protocols require the transmission of synchronizing information normally referred to as sync characters. The sync characters can be transmitted when Transmit Start of Message (TDSR bit 8) is set. This happens in one of two ways depending on the state of the IDLE bit (PCSAR bit 11). When the IDLE bit is cleared, the sync character is taken directly from the common sync register (PCSAR bits 7–0). The sync register would have been previously loaded by the software. If the IDLE bit is set, the sync character must be loaded into the TDSR by the software when it is to be transmitted. If multiple sync characters are to be transmitted, the TDSR must only be loaded with the first one of the sequence. This character will be transmitted until data information is loaded into the TDSR. The TBEMTY signal is asserted at the end of each sync character but the TSOM signal allows it to be ignored without causing a data late error. With bit-oriented protocols, the USYNRT automatically generates control characters as initiated by the software and inserts necessary information into the data stream to maintain transparency.

Typical programming examples in bit- and byte count-oriented protocols appear in Appendix D.

3.5 INTERRUPT VECTORS

The DPV11 generates two vector addresses, one for receive data and modem control and the other for transmit data.

The receive and modem control interrupt has priority over the transmit interrupt and is enabled by setting bit 6 (RXITEN) of the receiver control and status register (RXCSR).

If bit 6 of the RXCSR is set, a receiver interrupt may occur when any one of the following signals is asserted.

- Receive Data Ready (RDATRY)
- Receive Status Ready (RSTARY)
- Data Set Change (DAT SET CH)

The signal DAT SET CH only causes an interrupt if bit 5 (DSITEN) of the RXCSR is also set.

It is possible that a data set change interrupt could be pending while a receiver interrupt is being serviced, or the opposite could be true. In either case, the hardware ensures that both interrupt requests are recognized.

NOTE

The modem status change circuit interprets any pulse of two microseconds or greater duration as a data set change. This ensures that all legitimate transitions of modem status will be detected. However, on a poor line, noise may be interpreted as a data set change. Software written for the DPV11 must account for this possibility.

A transmitter interrupt request occurs if Transmit Interrupt Enable (TXINTEN) is set when Transmit Buffer Empty (TBEMTY) becomes asserted.

·清·《教授》:《1998年》:"你们是你有些人,你们们的是你的,你们的你们,你们们就是我们的你们。""你们,你们们不是你的。""你们,你们不是你的吗?"

化化物理验 网络印度希腊 医结束 医视觉 法问题 化分子 化分子合金 医子宫 医神经炎 化化化合物 法法法 化分子分子

1. X. S. S. S.

는 것으로 하는 것으로 알았는 것으로 있다. 위험에서 가지 것이 있는 것이 가지 않는 것으로 알려야 할 수 있다. 한 1943년 1945년 - 1970년 1971년 - 1975

CHAPTER 4 TECHNICAL DESCRIPTION

4.1 INTRODUCTION

This chapter provides a 2-level discussion of the DPV11. Paragraph 4.2 includes a description of the DPV11 logic in functional groups at the block diagram level. At this level, a general operational overview is also discussed. The second level of discussion is the detailed description, which covers the complete DPV11 logic at the circuit schematic level, as shown in the DPV11 print set.

4.2 FUNCTIONAL DESCRIPTION

4.2.1 Logic Description

For discussion purposes, the DPV11 logic is divided into the ten sections shown in Figure 4-1. The sections are described in Paragraphs 4.2.1.1 through 4.2.1.10.

4.2.1.1 Bus Transceivers – The interface for data, and address on the LSI-11 bus consists of four bus transceiver chips (DC005). These function as bidirectional buffers between the LSI-11 bus and the DPV11 Logic. These transceivers provide isolation, address comparison, and vector generation.


4.2.1.2 Read/Write Control – The read/write control logic consists of a DC004 protocol chip and its associated logic. It provides the control signals for accessing registers and strobing data. It controls reading from and writing into registers in both word and byte mode, and provides the deskew delays for these operations. When data has been placed on or picked up from the LSI-11 bus or when vector information has been placed on the LSI-11 bus, the read/write control logic notifies the processor by asserting BRPLY.

4.2.1.3 USYNRT and Bidirectional Buffer – The USYNRT provides a large portion of the functionality of the DPV11. The USYNRT is installed in a socket for ease of replacement. It provides complete serialization, deserialization and buffering of data between the modem and the LSI-11 bus. The USYNRT also provides logic support, via program parameter registers, for basic protocol handling and error detection.

The tri-state bidirectional buffer provides the fan-out drive to accommodate the number of circuits the USYNRT feeds.

4.2.1.4 Receive Control And Status Register (RXCSR) – This register contains most of the control and status information pertaining to receiver operation, including the status of the lines to and from the data set. The receive and data set interrupt enable bits are also contained in this register, but the receive interrupt enable is actually generated by the interrupt logic. The high byte of the RXCSR is read-only and the low byte is read/write. RXCSR is both word- and byte-addressable.

4.2.1.5 Transmit Control And Status Register – This register is the low byte of the parameter control and character length register (PCSCR). (The high byte is internal to the USYNRT). It contains most of the control and status information pertaining to transmit operations. The maintenance mode bit is also a part of this register. The register is read/write and can be accessed separately as the low byte of the PCSCR or in word mode when the entire PCSCR is accessed.

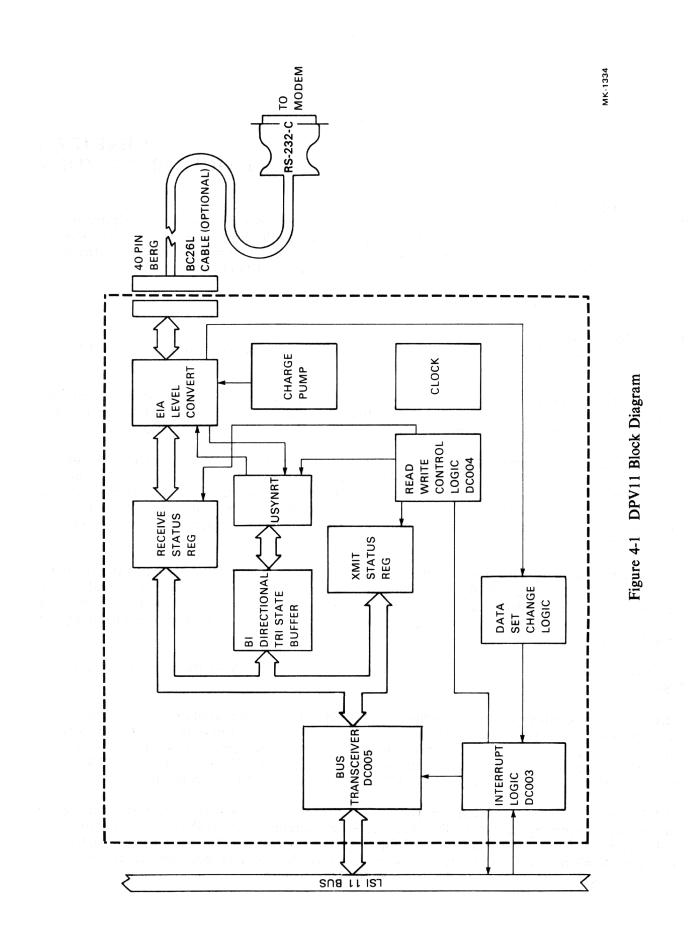

4-2

4.2.1.6 Interrupt Logic – Most of the logic for interrupts is contained in a single DC003 interrupt chip. The chip contains two interrupt channels: one for receive and one for transmit interrupts. The circuit generates a receive interrupt when the Receiver Interrupt Enable bit (RXITEN) is set and one of the following signals becomes asserted.

Receive Status Ready (RSTARY) Receive Data Ready (RDATRY) Modem Control Interrupt Request (MCINT)

MCINT requires that DSITEN (RXCSR bit 5) also be set.

If the Transmit Interrupt Enable bit (PCSCR bit 6) is set, a transmit interrupt is generated when the Transmit Buffer Empty signal (TBEMTY) is asserted.

Receive interrupts have priority over transmit interrupts.

4.2.1.7 Data Set Change Logic – This logic is used to determine if the modem had a change in status. Jumpers can be removed or installed to allow any or all of the following signals to set the Data Set Change bit (RXCSR bit 15).

RS-232-C	RS-449
Clear to Send (CTS)	Clear to Send (CTS)
Carrier Detect (CD)	Receiver Ready (RR)
Data Set Ready (DSR)	Data Mode (DM)
Ring Indicator (RI)	Incoming Call (IC)

If the Data Set Interrupt Enable bit and Receiver Interrupt Enable (RXCSR bits 5 and 6) are both set, Data Set Change causes the interrupt logic to generate an interrupt request.

4.2.1.8 Clock Circuit – The clock circuit consists of a 19.6608 MHz off-the-shelf oscillator and two 74LS390 dividers to provide the clock signals for the DPV11.


4.2.1.9 EIA Level Converters – These circuits contain drivers and receivers necessary for converting from TTL levels to EIA levels and from EIA levels to TTL levels. There are drivers and receivers to accommodate both RS-422-A (RS-449 compatible: limited to clock and data) and RS-423-A (RS-232-C compatible) electrical standards. Selection of RS-422-A or RS-423-A interface standard is provided by wire-wrap jumpers.

4.2.1.10 Charge Pump – This circuit converts the +12 volts to a negative voltage to power the RS-423-A drivers.

4.2.2 General Operational Overview

This discussion describes the relationships between the different sections of the block diagram from a simplified operational viewpoint. It is assumed for the purpose of this discussion that the DPV11 will be operated with the interrupts enabled. A simplified diagram which emphasizes the functions of the USYNRT (Figure 4-2) is referenced for both the receive and transmit operations. Bit-oriented protocol (BOP) and byte count-or character-oriented protocols (BCP) are not discussed in detail here.

4.2.2.1 Receive Operation – Serial data from the modem enters the EIA receiver where it is converted from EIA to TTL level. This TTL data is then presented directly to the receive serial input of

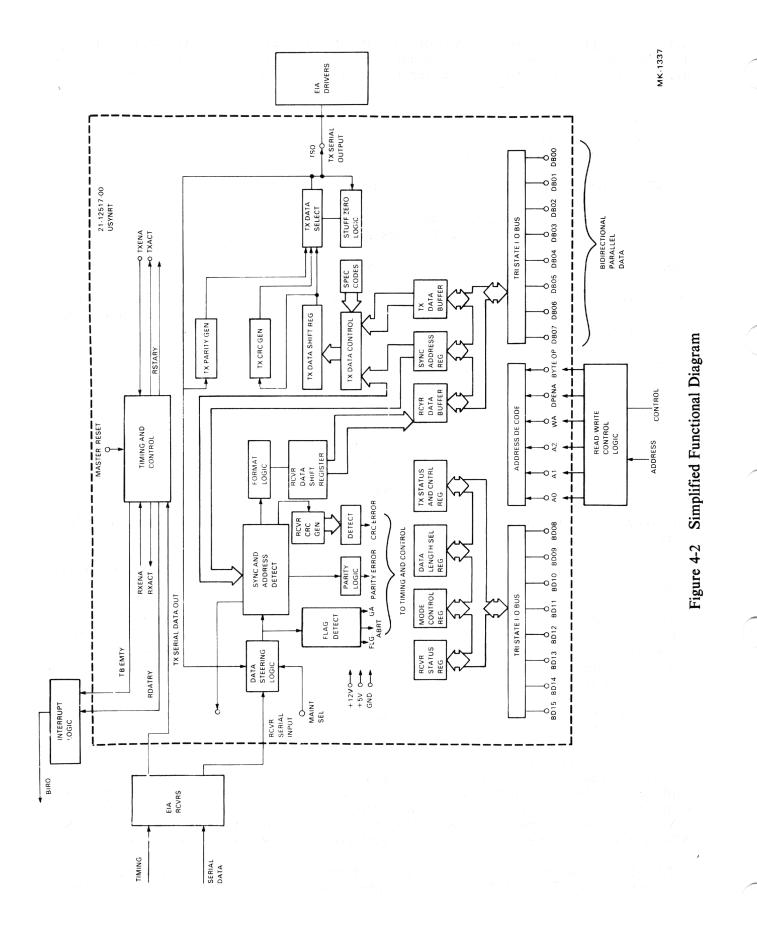

4-4

the USYNRT. At the same time the EIA receiver converts the receive timing signal from the modem to TTL level and presents it to the USYNRT. The USYNRT uses the timing signal to control the assembling of the incoming data characters. As the information enters the USYNRT, sync-detect and flag-detect circuits check for FLAG (BOP) or SYNC (BCP) until there is a match. When a match occurs, assembling of data characters begins. Error circuits check for errors while the data is being assembled. When a character is assembled in the receive data shift register, it is then transferred to the receive data buffer, and the USYNRT timing and control logic generates the signal receive data ready (RDATRY). Interrupt logic uses this signal to produce an interrupt request to the processor. When the processor responds to the interrupt request, the interrupt logic causes the bus transceiver circuits to assert the associated vector and the interrupt sequence takes place.

The processor now retrieves the data from the receive data buffer which resets the interrupt condition. To do this the processor asserts the address of the buffer and the necessary control signals on the bus. The bus transceivers recognize the address and enable the read/write control logic. The read/write control logic then generates the necessary control signals to select and read from the receive data buffer (low byte of RDSR). Data in the buffer is sent through the bidirectional tri-state buffer to the LSI-11 bus transceivers where it is enabled onto the LSI-11 bus and picked up by the processor. The US-YNRT is double-buffered so that while the processor is picking up the character from the receive data buffer, the receive data shift register is already assembling a second character. This process is repeated until the entire message is received.

4.2.2.2 Transmit Operation – When the processor wishes to send data to the modem, it first places the address of the transmit buffer (low byte of TDSR) and the necessary control signals on the LSI-11 bus.

The bus transceivers recognize the address and enable the read/write control logic which selects the register. The processor then places the parallel data on the LSI-11 bus and the read/write control logic gates it through the bus transceivers and writes it into the transmit buffer. When a character is written into the transmit data buffer, the USYNRT transfers it to its transmit shift register and asserts TBEMTY. Once the character is in the shift register, the USYNRT begins to serialize and send it by means of the serial output line to the EIA drivers. Here it is converted from TTL to EIA level and sent to the modem.

TBEMTY causes the interrupt logic to generate an interrupt request to the processor. At the completion of the interrupt sequence, the processor repeats the process of addressing the transmit buffer and sending another character. This operation continues until the entire message has been sent.

4.3 DETAILED DESCRIPTION

The circuit operation is described in Paragraphs 4.3.1 through 4.3.9.

4.3.1 Bus Transceivers

Data, address and control signals move between the LSI-11 bus and the DPV11 by means of a group of bus transceivers. The bus transceivers are contained in four DC005 transceiver chips and perform the following functions.

- Address selection/decode
- Data transfers to and from the LSI-11 bus
- Vector generation

4.3.1.1 Address Selection – Each DPV11 is assigned four consecutive addresses that are decoded to generate control signals to enable five registers in the DPV11. Four addresses are able to access five registers because two of the registers (RDSR and PCSAR) share the same address. RDSR is a read-only register and PCSAR is a write-only register. Refer to Chapter 2 for address assignments.

When the software communicates with the DPV11, it does so by placing the address of the register it wishes to access and the necessary control signals on the LSI-11 bus. The DPV11 checks the address to see if it is within the range assigned to it. If so, access to the register is allowed. Paragraphs 4.3.1.2 through 4.3.1.4 describe the decoding of the address.

4.3.1.2 Address Decode – Address decoding is accomplished in the DC005 chips where a comparison is made of the BDAL03 through BDAL12 lines with the states selected by the address jumpers W29 through W39. (Refer to Chapter 2 for address selection and jumper connections). Each DC005 chip looks at three address lines and compares each of them against a corresponding jumper connection. When each address line agrees with its jumper input, the DC005 asserts pin 3 high. If all four DC005 chips have pin 3 asserted, the address on the bus is within the range assigned to this DPV11. When this condition exists, the register decode circuit is enabled to allow access to the specific register being addressed. Notice that BDAL00 through BDAL02 are not used in the address compare. Line zero is used in byte selection and lines one and two are used to select a particular register. Register selection and byte operation are discussed in Paragraph 4.3.2.

4.3.1.3 Bus Data Transfers – Once the address has been accepted and access to the selected register has been granted, data transfers can take place on the bus. The DC005 chips handle this function too. Consider first the operation in which the processor is sending data to a register in the DPV11. In this case, the DC005s would be placed in receive mode by a high on pin 4. This is a result of control signals placed on the bus by the processor. In the receive mode, data on the BDAL0 through BDAL15 lines is passed through the DC005 and made available to the register on the DA0 through DA15 lines.

When the processor is requesting information from one of the DPV11 registers, the DC005s are placed in transmit mode by a high on pin 5. In the transmit mode, data from the selected register is presented to the DC005s on the DA0 through DA15 lines. The DC005s then pass this data to the bus on the BDAL0 through BDAL15 lines.

4.3.1.4 Vector Generation – A third function of the DC005 chips is vector generation. This is accomplished by daisy-chain strapping W40 through W45 to W46 in the proper configuration for the vector address desired. Refer to Chapter 2 for information on vector assignments and jumper connections. W46 is high when the vector is to be sent to the processor. The signal VECTOR H is asserted by the interrupt logic during an interrupt sequence. W45 corresponds to BDAL3 and W43 corresponds to BDAL8.

4.3.2 Read/Write Control Logic

The read/write control logic contains circuits for controlling register decoding, USYNRT operations, and BRPLY. A description of each follows.

4.3.2.1 Register Decode (Figure 4-3) – The selection of individual registers within the DPV11 is accomplished by a DC004 protocol chip and its associated logic. This circuit is enabled by an address match from the DC005s. When enabled, the DC004 decodes address lines 1 and 2 to produce one of four select signals. These select lines, however, do not directly select the registers. Two registers share the same address, one being a read-only and the other, a write-only register. One entire register and the low byte of another are external to the USYNRT. For these reasons, additional gates are used with the select lines to properly select the one register in five to be accessed. These gates use byte and write signals to aid in the register selection. Table 4-1 shows the register selection based on the three low-order address bits.

NOTE

All registers can be accessed in either word or byte mode. However, reading either byte of the RXCSR resets certain status bits in both bytes. Reading either byte of the RDSR resets data and certain status bits in both bytes of this register as well as bits 7 and 10 of the RXCSR.

NOTE

The address inputs to the DC004 are inverted, thereby causing a reverse order on the select lines. Pin 17 corresponds to select 0 and pin 14 corresponds to select 6. This applies also to the OUTLB (pin 13) and OUTHB (pin 12).

4.3.2.2 USYNRT Control – Most of the control signals for the USYNRT are generated by the DC004 and its associated logic. This paragraph describes the control signals and their functions.

ADR0, ADR1, and ADR2 are used to select a register within the USYNRT. They are encoded as shown in Table 4-2. ADR0 is used in conjunction with BYTE OP to select a byte.

WRITE USYNRT is used to control writing into or reading from registers within the USYNRT. When it is asserted, a write operation is indicated. When it is not asserted, a read operation is indicated. WRITE USYNRT is generated by ORing the OUTLB and OUTHB signals from the DC004. OUTLB and OUTHB are used to write data into the low byte, high byte or both bytes of a selected register. They are generated by the DC004 in response to the bus signals BWTBT, BDOUT, and BDAL0. OUTLB and OUTHB do not directly control byte selection for the USYNRT but are used to generate ADR0 and BYTE OP.

BYTE OP is used to indicate to the USYNRT that a byte operation is to be performed on the selected register. It is generated during a write operation when either OUTLB or OUTHB but not both are asserted.

DPENA (Data Port Enabled) is used to enable the tri-state data bus of the USYNRT and supply the necessary timing for transactions between the USYNRT and the external circuits. DPENA strobes the data for write or read operations. It is generated from the register select signals and the output of pin 8 of the DC004 chip which results directly from BDIN or BDOUT. Deskew delay is accomplished by using a 74LS164 serial to parallel shift register. Pin 8 of the DC004 is used as the serial input to the shift register which is clocked by a 100 ns clock. Initially the serial input is high and the shift register outputs are all high. 100 to 200 ns after the serial in goes low, DPENA becomes asserted to strobe the USYNRT. DPENA remains asserted for at least 300 ns as determined by pin 10 of the shift register. For read operations, DPENA will remain asserted until BDIN becomes not asserted. This is to ensure that the data is on the bus when the processor strobes it. For write operations DPENA will be asserted for 300 ns.

BRPLY (Bus Reply) indicates to the processor that the DPV11 has placed data on the bus or has received data from the bus. It is generated from the same circuit as DPENA and is asserted 300 ns after DPENA. BRPLY remains asserted until the processor responds by negating BDIN or BDOUT.

Figure 4-4 shows the timing for the generation of DPENA and BRPLY for a read operation. Figure 4-5 shows the timing for a write operation.

4.3.3 USYNRT, RXCSR, and PCSCR

Most of the registers used in the DPV11 are contained within the USYNRT. The receive control and status register (RXCSR) and the low byte of the parameter control and character length register (PCSCR) are external to the USYNRT. The USYNRT and the external registers are discussed in Paragraphs 4.3.3.1 through 4.3.3.

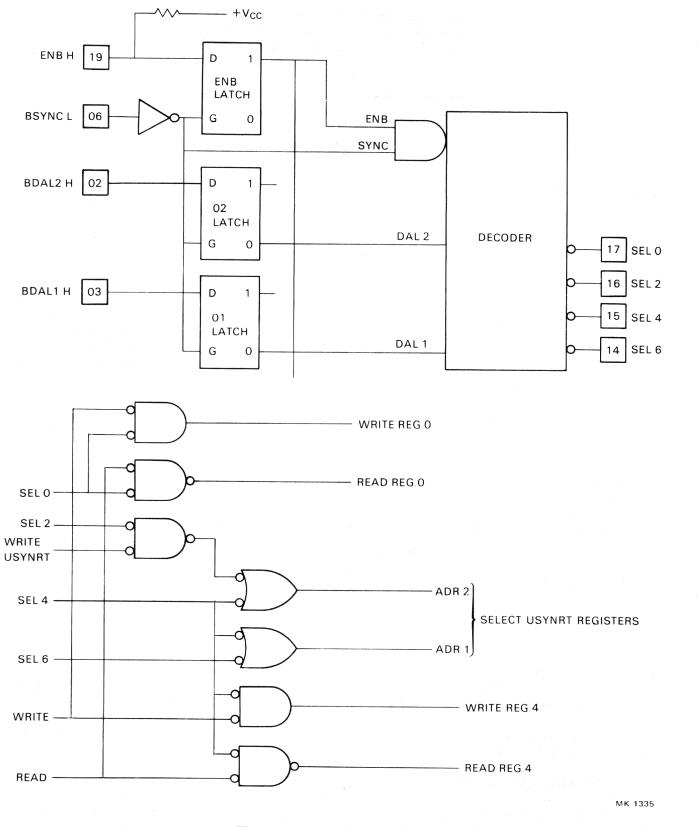


Figure 4-3 Register Decode


4-8

A2	A1	AO	Register
0 0 0 1 1	0 0 1 1 0 0	0 1 0 1 0 1	RXCSR (word or low byte) RXCSR (high byte) RDSR (read) or PCSAR (write) RDSR or PCSAR (high byte) PCSCR (word or low byte) PCSCR (high byte) TDSR (word or low byte)
ĩ	Î	1	TDSR (high byte)


 Table 4-1
 Register Selection

Table 4-2 USYNRT Register Select

ADR2	ADR1	Register
0	0	RDSR (read only)
0	1	TDSR
1	0	PCSAR (write only)
1	1	PCSCR (high byte)

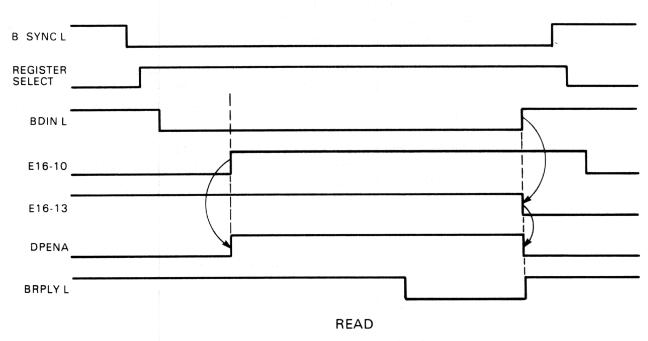

MK-1333



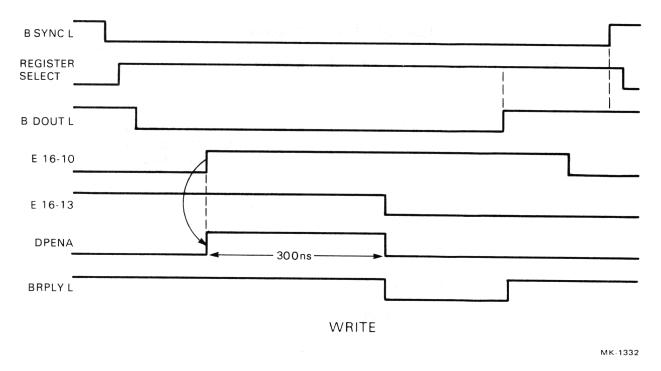


Figure 4-5 Timing for Write Operation

4.3.3.1 USYNRT – The universal synchronous receiver/transmitter (USYNRT) functions as a large scale integration (LSI) subsystem for synchronous communications. The USYNRT provides the logic support, via program parameter registers, for basic protocol handling and error detection. Protocol handling by the USYNRT conforms to standards imposed by these protocols, but is slightly different in each version of the USYNRT. The 5025 (2112517-00) is implemented in the DPV11. For more details on the USYNRT, refer to Appendix B or to A-PS-2112517-0-0 Purchase Specification.

4.3.3.2 Receive Control and Status Register (RXCSR) – The RXCSR is described in detail in Chapter 3. It is a buffer and line driver consisting of two 74LS244 chips and one 74LS174 hex D flip-flop. The low byte can be read or written into but the high byte can only be read. The write operation occurs on the positive transition of WREG0. The register can be read when RREG0 is asserted low.

4.3.3. Parameter Control and Character Length Register (PCSCR) – This register is described in Chapter 3. Its upper byte is internal to the USYNRT and its low byte is external. Three bits (0, 3, and 4) of the low byte of this register are directly program-writable with bit zero being write-only. Bit 6 is program writable but is a function of the interrupt circuit.

4.3.4 Interrupt Logic

Most of the logic for interrupts is contained in a single DC003 interrupt chip. The chip contains two interrupt channels: one for receiver and modem control interrupts and one for transmitter interrupts.

The receive and modem control interrupt has the higher priority and may occur when receive interrupt enable (RX INT ENA) is set and any of the following signals become asserted.

Receive Data Ready (RDATRY) Receive Status Ready (RSTARY) Data Set Change (DAT SET CH)

Notice that DAT SET CH requires that MC INT ENA (RXCSR bit 5) also be asserted.

When a register in the receive section (RXCSR or RDSR) is accessed; i.e., when servicing a receive interrupt request, the receive interrupt request is disabled for 600 ns by the output on pin 5 of the 74LS74 flip-flop. This is done to ensure that any modem control interrupt request that might have occurred while servicing the receive interrupt request, is recognized. When the flip-flop is reset by the 600 ns signal, a negative to positive transition is recognized on pin 17 of the DC003 if a modem control interrupt request is present.

A transmitter interrupt is generated by the DC003 if the TBEMTY signal is asserted when transmitter interrupt enable (bit 6 of PCSCR) is set.

Both the TX INT ENA and RX INT ENA bits are located physically in the DC003 interrupt chip although they are functionally part of the PCSCR and RXCSR respectively.

The bus interrupt request (BIRQ) is asserted by the DC003 for either a receive or transmit interrupt request. The processor responds to BIRQ by asserting BIAKI and BDIN. BIAKI is the interrupt acknowledge signal. It is passed down the priority chain until it reaches the section of the interrupt chip that initiated the request.

When the interrupt logic receives both BDIN and BIAKI, it asserts the signal VECTOR. VECTOR enables the assertion of the vector address by the DS005s. If the interrupt is a transmitter interrupt, the RQSTB signal would assert vector address bit 2.

4.3.5 Data Set Change Circuit (Transition Detector)

The data set change circuit consists of a 74LS273 D-register, exclusive NOR gates and two flip-flops. Setting of the Data Set Change bit (DAT SET CH) is determined by the configuration of jumpers W24 through W28. Any or all of the following modem signals can set DAT SET CH if its associated jumper is installed.

RS-232-C	RS-449
Clear to Send (CTS)	Clear to Send (CTS)
Carrier Detect (CD)	Receiver Ready (RR)
Data Set Ready (DSR)	Data Mode (DM)
Ring Indicator (RI)	Incoming Call (IC)

NOTE

The modem change circuit interprets any pulse of two microseconds or greater duration as a modem status change. This ensures that all legitimate modem status changes will be detected. However, on a poor line, noise may be interpreted as a modem status change. Software written for the DPV11 must account for this possibility.

4.3.6 Clock Circuit

The clock circuit consists of an off-the-shelf 19.6608 MHz crystal oscillator, and two 74LS390 counters. The 19.6608 MHz signal is divided by the counter circuits to produce the following four clock signals.

1. LOCAL CLK (49.152 kHz) – Normally jumpered to NULL MODEM CLK (W18 and W21) and used as the data clock.

- 2. DIAG CLK (1.9661 kHz) Nonsymmetrical clock available for diagnostic purposes (not recommended for local communications). It becomes the transmit clock when the DPV11 is placed in diagnostic mode. DIAG CLK can also be jumpered to LOCAL CLK for 50 kHz operation but some of the tests must be omitted.
- 3. SR CLK (9.8304 MHz) Used to clock the shift register to establish delays for DPENA and BRPLY.
- 4. Charge PUMP CLK (491.52 kHz) Used by the charge pump circuit and transition detector.

4.3.7 USYNRT Timing – USYNRT timing for the transmit and receive sections originates with the modem and is gated through the AND-OR inverter to the USYNRT.

During normal receive data transfers, the 74LS51 gates receiver timing from the modem as receive clock pulse (RCP) to the USYNRT. If the modem clock stops with the last valid data bit, Receiver Ready becomes not asserted. The next positive transition of the NULL MODEM CLK causes 74LS74 pin 8 to go high, thus substituting NULL MODEM CLK for modem receive timing. In this way, the USYNRT receives the necessary 16 clock pulses to complete its operation after the modem has stopped sending.

During normal transmit data transfers, timing for the USYNRT is gated from the modem through the 74LS51 pin 6 to the USYNRT.

In maintenance mode, the signal MSEL disables the modem timing and enables the DIAG CLK as the clock for the USYNRT.

4.3.8 EIA Receivers

26LS32 quad differential line receivers are used to accept signals and data from the modem. Jumpers W12 through W17 are terminating resistors which may be connected for RS-422-A but must be disconnected for RS-423-A.

4.3.9 EIA Drivers

Two types of drivers are used to send signals and data to the modem. 9638 drivers are used for RS-422-A and 9636 drivers are used for RS-423-A.

4.3.10 Maintenance Mode

The USYNRT is placed in maintenance mode by setting Maintenance Mode Select (bit 3 of the PCSCR). When this happens, the serial output of the transmit section is internally looped back as serial input and the transmit serial output is held asserted. All clocking of both the receive and transmit sections is controlled by the transmitter clock input. This signal is derived from the 2 kHz clock as determined by the 74LS51 AND-OR inverter.

CHAPTER 5 MAINTENANCE

5.1 SCOPE

This chapter provides a complete maintenance procedure for the DPV11 and includes a list of required test equipment and diagnostics. The maintenance philosophy and procedures for preventive and corrective maintenance are discussed.

5.2 TEST EQUIPMENT RECOMMENDED

Maintenance procedures for the DPV11 require the test equipment and diagnostic programs listed in Table 5-1.

Equipment	Manufacturer	Designation
Multimeter	Triplett or Simpson	Model 630-NA or 260 or equivalent
Oscilloscope	Tektronix	Type 453 or equivalent
X10 Probes (2)	Tektronix	P6008 or equivalent
Module extenders	DIGITAL	W984 (double)
Cable turn-around connector	DIGITAL	H3259
On-board test connector	DIGITAL	H3260
Breakout box	IDS	
LIB kit	DIGITAL	ZJ314-RB
Document only		ZJ314-RZ
Document and paper tape	a se se se se de la servicie de la s servicie de la servicie de la servic servicie de la servicie de la servic	ZJ314-RB
Paper tape only	에 가장은 문제에 가지되었다. 이상 가지 않는 것이다. - 사업에 	ZJ314-PB
Fiche		ZJ314-FR

Table 5-1 Test Equipment Recommended

5-1

5.3 MAINTENANCE PHILOSOPHY

The basic approach to DPV11 fault isolation is the use of stand-alone diagnostic programs and maintenance mode features supported by the hardware.

Typical applications of the DPV11 do not allow lengthy troubleshooting sessions; therefore, the maintenance philosophy in the field is module swapping. The defective module is returned to the factory for repair.

5.4 PREVENTIVE MAINTENANCE

There is no scheduled preventive maintenance for the DPV11. Preventive maintenance for the DPV11 is integrated into its corresponding system preventive maintenance and consists of checking the power supply voltage. Whenever the module or cables have been disturbed, diagnostics (specifically DEC/X11 and DCLT) should be run to verify proper operation.

5.5 CORRECTIVE MAINTENANCE

Since the field replaceable units are the M8020 and the cables, all diagnosis should be directed to isolation of one of these components.

NOTE

The operating jumper configuration of the DPV11 module being serviced should be recorded prior to any changes for maintenance purposes. This will facilitate reconfiguring the module when the service activity is complete.

5.5.1 Maintenance Mode

To aid in troubleshooting, the DPV11 has a software-selectable maintenance mode which causes the serial output of the USYNRT to be internally connected to its serial input. When in maintenance mode, serial data from the modem is disabled and the send and receive timing from the modem are replaced with a clock signal generated on the M8020 module. The clock rate is 2K b/s.

The diagnostics normally operate with and without the Maintenance Mode Select (MSEL) bit set. In this way the USYNRT chip can be isolated from the remainder of the circuitry.

5.5.2 Loopback Connectors

The cable loopback connector shipped with the DPV11-DB (bundled version) is the H3259. This connector is connected to the modem end of the BC26L cable when it is used. No cables or test connectors are shipped with the DPV11-DA (unbundled versions). An on-board connector (H3260) can be purchased separately (see Paragraph 2.5 and Figure 2-4) for connecting to J1 on the M8020 module. It provides for testing of all M8020 logic.

5.5.3 Diagnostics

DPV11 diagnostics aid in the isolation process and should be run when a malfunction is indicated. Diagnostics should also be run to verify operation after repair.

NOTE

To ensure that all M8020 logic circuits are checked, on-board test connector H3260 must be used. However, the DPV11 system cannot be assumed to be thoroughly checked unless the DIGITAL-supplied cable is also tested.

Diagnostics must be run with a cable turn-around connector (H3259) at the modem end of the BC26L-25 cable.

The following diagnostics are available to aid in the isolation and verification process.

5.5.3.1 CVDPV* Functional Diagnostic – CVDPV* is designed to verify the functionality of the DPV11. No resolution to the chip is intended. CVDPV* is a stand-alone program that must be executed under control of the PDP-11 diagnostic supervisor (DS). Errors are reported as they occur in the program, unless they are inhibited, and conform to the DS error report format. For information on loading and running of the DS, see Appendix A.

CVDPV* is compatible with XXDP+, ACT/SLIDE, APT or ABS. It consists of a number of tests which function as follows.

Test No.	Description
and in a star and a star a	Verifies that addressing the RXCSR does not cause a nonexistent memory trap.
2	Verifies that the DPV11 may be properly initialized by a Master Clear or LSI-11 Re- set.
lange plant komme "Britt ander och inkar	Writes and reads data patterns into all writable bits to verify bit validity and address- ing paths.
4	Enables and ensures that the transmitter is activated.
5	Verifies that TBEMTY is asserted and cleared properly for all possible conditions.
6	Verifies proper operation of the transmit interrupt.
7	Enables and ensures that the receiver is activated, and RDATRY is asserted properly.
8	Verifies proper operation of the receive interrrupt for the reception of data.
9	Verifies proper operation of RSTARY for all possible conditions.
10	Verifies proper operation of the receive interrupt for status.
11	Ensures that both transmit and receive interrupts are recognized.
12	Verifies proper operation of all modem status bits and ensures that DSCNG is set when a transition occurs.
13	Verifies that an interrupt is received when DSCNG is set.
14	Verifies that if a DSCNG occurs during a receive interrupt, it will be recognized.
15–20	Verifies proper operation with bit-oriented protocols (BOP).
21–23	Verifies proper operation with byte count-oriented protocols (BCP).
24–28	Verifies CRC and VRC functions.
29	Verifies maintenance mode noninterrupt data operations.
30–36	Verifies BOP data operation.
37-40	Verifies BCP data operation.

5-3

- 41 Verifies DDCMP message protocol and message transmission.
- 42 Verifies high-speed BCP data operation.

43 Verifies high-speed BOP data operation.

5.5.3.2 DEC/X11 CXDPV Module – CXDPV exercises up to six consecutively addressed DPV11 synchronous interfaces as they relate to the total system configuration. It is very useful in determining whether a DPV11 is the failing component among other system components in a system environment. It is a system exerciser and does not operate as a stand-alone test. It must be configured and run as part of a total system exerciser.

The DEC/X11 System Exerciser must be run after the stand-alone diagnostic CVDPV* has been run. It determines if the DPV11 or another device adversely affects the total system operation. For more information on DEC/X11, refer to the DEC/X11 User Manual (AC-FO53B-MC) and DEC/X11 Cross-Reference (9AC-F055C-MC)

5.5.3.3 Data Communications Link Test CVCLH* (DCLT) – DCLT is a communications equipment maintenance tool designed to isolate failures to either the interface, the telephone communication line, or the modem. It exercises DPV11 to DPV11 links.

DCLT is XXDP+ or APT compatible and runs under control of the diagnostic supervisor (DS) (see Appendix A). It requires 24K of memory. For more information on DCLT refer to CVCLH* document AC-F582A-MC.

5-4

APPENDIX A DIAGNOSTIC SUPERVISOR SUMMARY

A.1 INTRODUCTION

The PDP-11 diagnostic supervisor is a software package that performs the following functions.

- Provides run-time support for diagnostic programs running on a PDP-11 in stand-alone mode
- Provides a consistent operator interface to load and run a single diagnostic program or a script of programs
- Provides a common programmer interface for diagnostic development
- Imposes a common structure upon diagnostic programs
- Guarantees compatibility with various load systems such as APT, ACT, SLIDE, XXDP+, ABS Loader
- Performs nondiagnostic functions for programs, such as console I/O, data conversion, test sequencing, program options

A.2 VERSIONS OF THE DIAGNOSTIC SUPERVISOR

File Name	Environment
HSAA **.SYS	XXDP+
HSAB **.SYS	APT
HSAC **.SYS	ACT/SLIDE
HSAD **.SYS	Paper Tape (Absolute Loader)

In the above file names, "**" stands for revision and patch level, such as "A0".


A.3 LOADING AND RUNNING A SUPERVISOR DIAGNOSTIC

A supervisor-compatible^{*} diagnostic program may be loaded and started in the normal way, using any of the supported load systems. Using XXDP+ for example, the program CVDPVA.BIN is loaded and started by typing .R CVDPVA.

The diagnostic and the supervisor will automatically be loaded as shown in Figure A-1 and the program started. The program types the following message.

> DRS LOADED DIAG.RUN-TIME SERVICES CVDPV-A-0

* To determine if diagnostics are supervisor-compatible, use the List command under the Setup utility (see Paragraph A.5.).

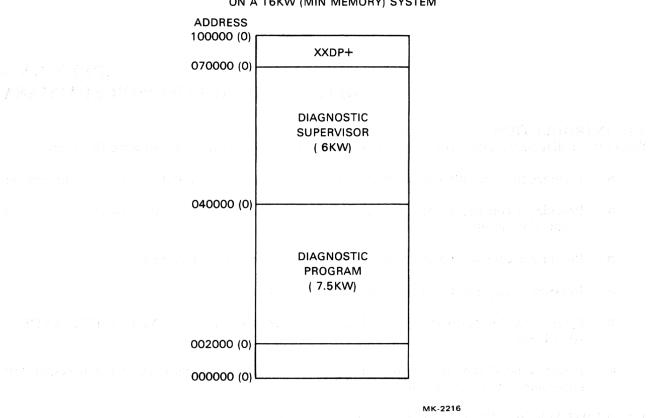

XXDP+ / DIAGNOSTIC SUPERVISOR MEMORY LAYOUT ON A 16KW (MIN MEMORY) SYSTEM

Figure A-1 Typical XXDP+/Diagnostic Supervisor Memory Layout

DIAGNOSTIC TESTS UNIT IS DPV11 DR>

DR> is the prompt for the diagnostic supervisor routine. At this point a supervisor command must be entered (the supervisor commands are listed in Paragraph A.4).

Five Steps to Run a Supervisor Diagnostic

1. Enter Start command.

When the prompt DR > is issued, type:

STA/PASS:1/FLAGS:HOE <CR>

The switches and flags are optional.

2. Enter number of units to be tested.

The program responds to the Start command with:

UNITS?

At this point enter the number of devices to be tested.

A-2

3. Answer hardware parameter questions.

After the number of devices to be tested has been entered, the program responds by asking a number of hardware questions. The answers to these questions are used to build hardware parameter tables in memory. A series of questions is posed for each device to be tested. A "Hardware P-Table" is built for each device.

4. Answer software parameter questions.

When all the "Hardware P-Tables" are built, the program responds with:

CHANGE SW?

If other than the default parameters are desired for the software, type Y. If the default parameters are desired, type N.

If you type Y, a series of software questions will be asked and the answers to these will be entered into the "Software P-Table" in memory. The software questions will be asked only once, regardless of the number of units to be tested.

5. Diagnostic execution.

After the software questions have been answered, the diagnostic begins to run.

What happens next is determined by the switch options selected with the Start command, or errors occurring during execution of the diagnostic.

A.4 SUPERVISOR COMMANDS

The supervisor commands that may be issued in response to the DR> prompt are as follows.

- Start Starts a diagnostic program.
- Restart When a diagnostic has stopped and control is given back to the supervisor, this command restarts the program from the beginning.
- Continue Allows a diagnostic to continue running from where it was stopped.
- Proceed Causes the diagnostic to resume with the next test after the one in which it halted.
- Exit Transfers control to the XXDP+ monitor.
- Drop Drops units specified until an Add or Start command is given.
- Add Adds units specified. These units must have been previously dropped.
- Print Prints out statistics if available.
- Display Displays P-Tables.
- Flags Used to change flags.
- ZFLAGS Clears flags.

All of the supervisor commands except Exit, Print, Flags, and ZFLAGS can be used with switch options.

A.4.1 Command Switches

Switch options may be used with most supervisor commands. The available switches and their function are as follows.

• ./TESTS: - Used to specify the tests to be run (the default is all tests). An example of the tests switch used with the Start command to run tests 1 through 5, 19, and 34 through 38 would be:

DR> START/TESTS : 1-5 : 19 : 34-38 <CR>

• ./PASS: – Used to specify the number of passes for the diagnostic to run. For example:

DR> START/PASS : 1

In this example, the diagnostic would complete one pass and give control back to the supervisor.

- ./EOP: Used to specify how many passes of the diagnostic will occur before the end of pass message is printed (the default is one).
 - ./UNITS: Used to specify the units to be run. This switch is valid only if N was entered in response to the CHANGE HW? question.
- ./FLAGS: Used to check for conditions and modify program execution accordingly. The conditions checked for are as follows.

:HOE –Halt an error (transfers control back to the supervisor)

:LOE - Loop on error

:IER – Inhibit error reports

:IBE – Inhibit basic error information

:IXE - Inhibit extended error information

:PRI – Print errors on line printer

:PNT – Print the number of the test being executed prior to execution

:BOE – Ring bell on error

:UAM – Run in unattended mode, bypass manual intervention tests

:ISR – Inhibit statistical reports

:IOU - Inhibit dropping of units by program

A.4.2 Control/Escape Characters Supported

The keyboard functions supported by the diagnostic supervisor are as follows.

• CONTROL C (\uparrow C) – Returns control to the supervisor. The DR> prompt would be typed in response to CONTROL C. This function can be typed at any time.

- CONTROL Z (\uparrow Z) Used during hardware or software dialogue to terminate the dialogue and select default values.
- CONTROL O (\uparrow O) Disables all printouts. This is valid only during a printout.
- CONTROL S (\uparrow S) Used during a printout to temporarily freeze the printout.
- CONTROL Q (\uparrow Q) Resumes a printout after a CONTROL S.

A.5 THE SETUP UTILITY

Setup is a utility program that allows the operator to create parameters for a supervisor diagnostic prior to execution. This is valid for either XXDP+ or ACT/SLIDE environments. Setup asks the hardware and software questions and builds the P-Tables.

The following commands are available under Setup.

List – list supervisor diagnostics Setup – create P-Tables Exit – return control to the supervisor

The format for the List command is:

LIST DDN:FILE.EXT

Its function is to type the file name and creation date of the file specified if it is a revision C or later supervisor diagnostic. If no file name is given, all revision C or later supervisor diagnostics are listed. The default for the device is the system device, and wild cards are accepted.

The format for the Setup command is:

SETUP DDN:FILE.EXT = DDN:FILE.EXT

It reads the input file specified and prompts the operator for information to build P-Tables. An output file is created to run in the environment specified. File names for the output and input files may be the same. The output and input device may be the same. The default for the device is the system device and wild cards are not accepted.

- キーキャン研究会会の生活が必要的な必要がないため、そのため、特別はないのでの許定のため、行い改立で したいたちがす 読み成正 からい
 - - - 그는 資源을 가지 않는 것 같은 물로 물로 가지 않을까? 그는 것을 안 가지? 귀엽다는 명

그들을 담은 것은 말 많은 것 같을 것 같다.

うくせい しんしゅうしょう 見たがたい したい さんしく したい ちょういしょう ショット・ション かいしょう ちゅうかん しょうかい たましん あいしょう しょうしょう しょうしょう しょうしょう しょうしょう しょうし しんのでする しゃしみのみ (予測した) かかまた しょうかしょう 人 不能行う ショット・ビード しいく パット・ション かいしい べいたる あい たたい しょう つかり 使用の かないの あみの コン みたいとう かんかん はたい 学 学 し

一下,后周,一只不同,不可以的人,如何不能在一次的"就是"的过去式和过去分词 放作的

网络拉拉斯 网络普通德国际法的领袖分词

그는 것이 이 문화가 같았다.

ीष्ठ मान्य स्थल के क्षेत्र सेन्द्र हिंदा साथ प्राप्त के प्राप्त के प्राप्त के प्राप्त के साथ स्थल सेन्द्र से सा प्रकृषिक्षेत्र व्यक्तिय हो से 14 फीट क्षण्य त्या द्या के विद्यालय के प्राप्त के प्राप्त के प्राप्त कर साथ से गई "फिट क्षेत्र में 15 फीट क्षणक त्या कर के लिया जात्र के किराज प्राप्त के प्राप्त के प्राप्त कर के साथ से गई त्या

化二乙酸 计加入性心器 医糖 计算法或目的 医硫

이 이번 이 가슴에 가지 않는 것 같은 것 같은 것 같아요.

, a such that eight film that from precise a commence of the firm of the state of antifer for a such that the Adversary both many for the constraint of the such and the more and the such precise of the device of the film Support from from a state that the such as the such as the such as the such precise of the such precise of the and full hoge days of the state of the such as the such as the such as the such precise of the such precise of the

APPENDIX B USYNRT DESCRIPTION

5025 Universal Synchronous Receiver/Transmitter (USYNRT)

The data paths of the USYNRT provide complete serialization, descrialization and buffering. Output signals are provided to the USYNRT controller to indicate the state of the data paths, the command fields or recognition of extended address fields. These tasks must be performed by the USYNRT controller.

The USYNRT is a 40-pin dual-in-line package (DIP). Figure B-1 is a terminal connection (identification) diagram.

Data port bits DP07:DP00 are dedicated to service four 8-bit wide registers. Bits DP15:DP08 service either control information or status registers. The PCSCR register is reserved. (See Figure B-2.)

Purchase Specification 2112517-0-0 provides a detailed description of the 5025 USYNRT.

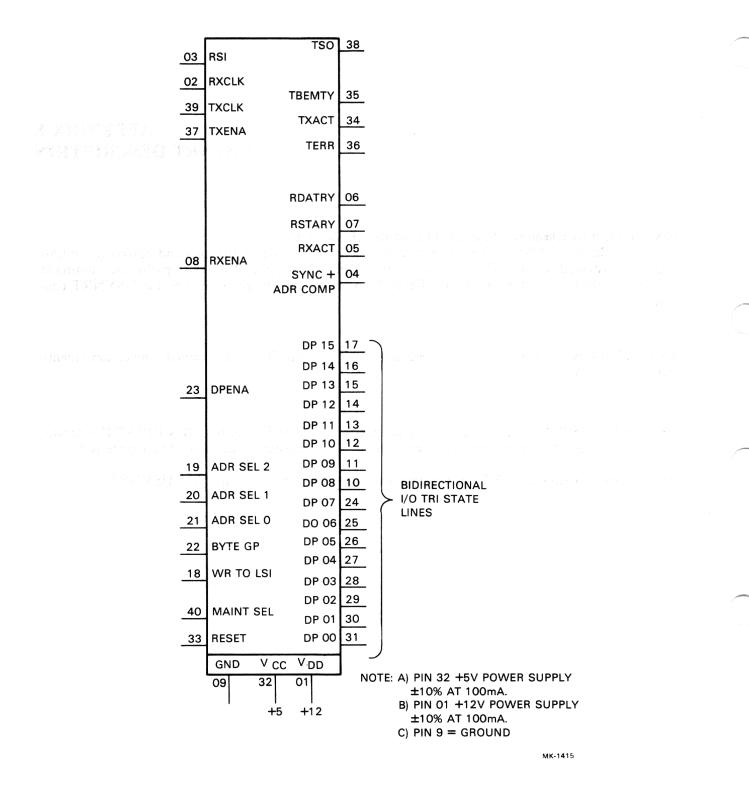


Figure B-1 Terminal Connection Identification Diagram (2112517-0-0 Variation)

DP15	14	13	12	11	10	9	8
ERR CHK	ASSY	BIT ACCO	DUNT	OVER RUN	ABORT OR GA	REOM	RSON
R/O	R/O	R/O	R/O	R/O	R/O	R/O	R/O
			ana para di sa ka ka Ka				
7	6	5	4	3	2	1	DPOO
	and a state	с				ter an ann an	
n - na an an			RX D	ATA			1-11
R/O	R/O	R/O	R/O	R/O	R/O	R/O	R/O
					RDSR		ADRO
			n an sin an	n an an an an an a' san sinn Sinn Sinn Sinn Sinn Sinn Sinn Sinn			an a
15	14	13	12	11	10	9	8
TERR				TGA	TABORT	TEOM	TSOM
R/O		- 	all all a	R/W	R/W	R/W	R/W
7	6	5	4	3	2	1	0
			TX DA	ATA	14 - 14 - 14 - 14 - 14 - 14 - 14 - 14 -		

MK-1502

R/W

R/W

Figure B-2 5025 Internal Register Bit Map (2112517-0-0 Variation) (Sheet 1 of 2)

R/W

R/W

TDSR

R/W

R/W

R/W

R/W

15	14	13	12	11	10	9	8
ویک رو د در بروز . در در در در در در . در این در در در در در در .	CCP + MODE	LOOP + STRIP SYNC	SEC ADRS MODE	IDLE SEL	<ei< td=""><td>R TYPE S</td><td>SEL</td></ei<>	R TYPE S	SEL
	R/O	R/O	R/O	R/O	R/O	R/O	R/O
							•
7	6	5	4	3	2	1	0
			OR	 "X RX SYN X SEC ADF 			
R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W
				· · ·	-9		ADR4
15	14	13	12	11	10	9	8

15	14	13	12	11	10	9	8
						11 m - 1	
	DATA LEN	SEL	EXADD	EXCON		DATA LEN	SEL>
02	01	00			02	01	00
R/W	R/W	R/W	R/W	R/W	R/W	R/W	
					· · · · · ·		
7	6	5	4	3	2	1	0
		-	RESE	RVED		n na serie de la composición de la comp	
					PCSCR		ADR 6

Figure B-2 5025 Internal Register Bit Map (2112517-0-0 Variation) (Sheet 2 of 2)

MK-1503

APPENDIX C IC DESCRIPTIONS


C.1 GENERAL

This appendix contains data on the LSI-11 chips and some of the unusual ICs used by the DPV11. The other ICs are common, widely-used logic devices. Detailed specifications on these chips are readily available, and hence are not included here.

C.2 DC003 INTERRUPT CHIP

The interrupt chip is an 18-pin DIP device. It provides the circuits to perform an interrupt transaction in a computer system that uses a "pass-the-pulse" type arbitration scheme. The device provides two interrupt channels labeled A and B, with the A section at a higher priority than the B section. Bus signals use high-impedance input circuits or high-drive open-collector outputs, which allow the device to directly attach to the computer system bus. Maximum current required from the V_{cc} supply is 140 mA.

Figure C-1 is a simplified logic diagram of the DC003 IC. Table C-1 describes the signals and pins of the DC003.

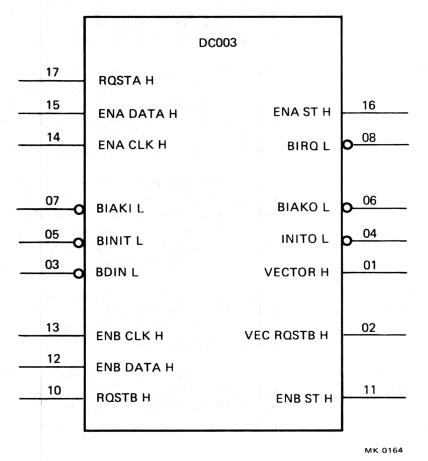



C-1

Table C-1 DC003 Pin/Signal Descriptions

Pin	Signal	Description
1	VECTOR H	Interrupt Vector Gating Signal – This signal gates the appropri- ate vector address onto the bus and forms the bus signal BRPLY L. Not used in the DPV11.
2	VEC RQSTB H	Vector Request B Signal – When asserted, this signal indicates RQST B service vector address is required. When negated, it indicates RQST A service vector address is required. VECTOR H is the gating signal for the entire vector address; VEC RQST B H is normally bit 2 of the address.
3	BDIN L	Bus Data In – THE BDIN signal always precedes a BIAK sig- nal.
4	INITO L	Initialize Out – This is the buffered BINIT L signal used in the device interface for general initialization.
5	BINIT L	Bus Initialize – When asserted, this signal brings all drive lines to their negated state (except INITO L).
6	BIAKO L	Bus Interrupt Acknowledge – This signal is the daisy-chained signal that is passed by all devices not requesting interrupt service (see BIAKI L). Once passed by a device, it must remain passed until a new BAIKI L is generated.
7	BIAKI L	Bus Interrupt Acknowledge – This signal is the processor's re- sponse to BIRQ L true. This signal is daisy-chained such that the first requesting device blocks the signal propagation while nonrequesting devices pass the signal on as BIAKO L to the next device in the chain. The leading edge of BIAKI L causes BIRQ L to be unasserted by the requesting device.
8	BIRQ L	Asynchronous Bus Interrupt Request – The request is generated by a true RQST signal along with the associated true Interrupt Enable signal. The request is removed after the acceptance of the BDIN L signal and on the leading edge of the BAIKI L sig- nal, or the removal of the associated interrupt enable, or due to the removal of the associated request signal.
17 10	RQSTA H RQSTB H	Device Interrupt Request Signal – When asserted with the en- able A/B flip-flop asserted, this signal causes the assertion of BIRQ L on the bus. This signal line normally remains asserted until the request is serviced.
16 11	ENA ST H ENB ST H	Interrupt Enable – This signal indicates the state of the inter- rupt enable A/B internal flip-flop which is controlled by the sig- nal line ENA/B DATA H and the ENA/B CLK H clock line.

Pin	Signal	Description
15 12	ENA DATA H ENB DATA	Interrupt Enable Data – The level on this line, in conjunction with the ENA/B CLK H signal, determines the state of the in- ternal interrupt enable A flip-flop. The output of this flip-flop is monitored by the ENA/B ST H signal.
14 13	ENA CLK H ENB CLK H	Interrupt Enable Clock – When asserted (on the positive edge), interrupt enable A/B flip-flop assumes the state of the ENA/B DATA H signal line.

 Table C-1
 DC003
 Pin/Signal
 Descriptions (Cont)

C.3 DC004 PROTOCOL CHIP

The protocol chip is a 20-pin DIP device that functions as a register selector, providing the signals necessary to control data flow into and out of up to four word registers (8 bytes). Bus signals can directly attach to the device because receivers and drivers are provided on the chip. An RC delay circuit is provided to slow the response of the peripheral interface to data transfer requests. The circuit is designed such that if tight tolerance is not required, then only an external 1K \times 20 percent resistor is necessary. External RCs can be added to vary the delay. Maximum current required from the V_{cc} supply is 120 mA.

Figure C-2 is a simplified logic diagram of the DC004 IC. Signal and pin definitions for the DC004 are shown in Table C-2.

C.4 DC005 BUS TRANSCEIVER CHIP

The 4-bit transceiver is a 20-pin DIP, low-power Schottky device for primary use in peripheral device interfaces, functioning as a bidirectional buffer between a data bus and peripheral device logic. In addition to the isolation function, the device also provides a comparison circuit for address selection and a constant generator, useful for interrupt vector addresses. The bus I/O port provides high-impedance inputs and high-drive (70 mA) open-collector outputs to allow direct connection to a computer's data bus. On the peripheral device side, a bidirectional port is also provided, with standard TTL inputs and 20 mA tri-state drivers. Data on this port is the logical inversion of the data on the bus side.

Three address jumper inputs are used to compare against three bus inputs and to generate the signal MATCH. The MATCH output is open-collector, which allows the output of several transceivers to be wire-ANDed to form a composite address match signal. The address jumpers can also be put into a third logical state that disconnects that jumper from the address match, allowing for "don't care" address bits. In addition to the three address jumper inputs, a fourth high-impedance input line is used to enable/disable the MATCH output.

Three vector jumper inputs are used to generate a constant that can be passed to the computer bus. The three inputs directly drive three of the bus lines, overriding the action of the control lines.

Two control signals are decoded to give three operational states: receive data, transmit data, and disable.

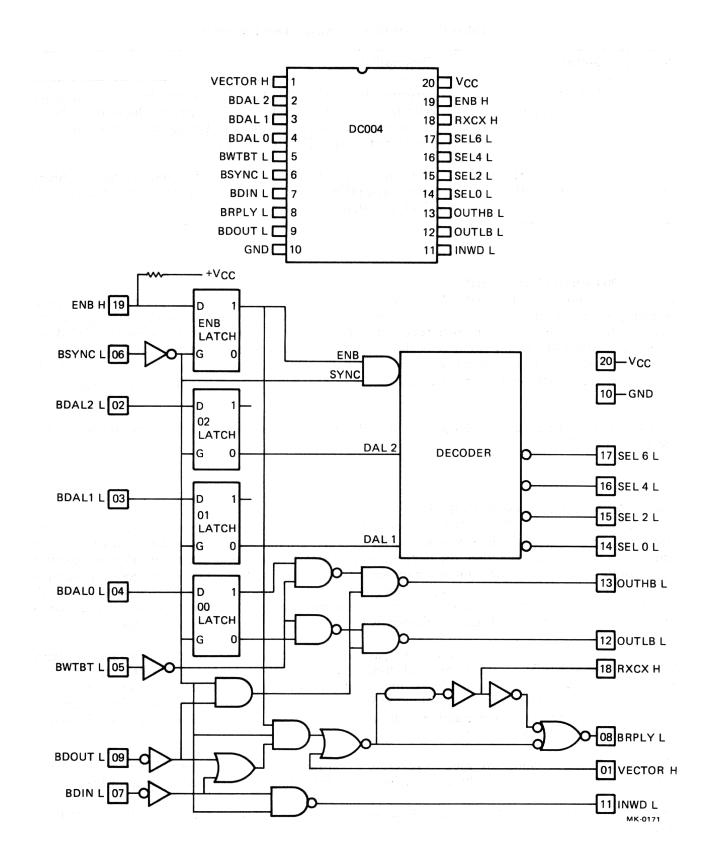


Figure C-2 DC004 Simplified Logic Diagram

C-4

Table C-2 DC004 Pin/Signal Descriptions

Pin	Signal	Description
1	VECTOR H	Vector – This input causes BRPLY L to be generated through the delay circuit. Independent of BSYNC L and ENB H.
2 3 4	BDAL2 L BDAL1 L BDAL0 L	Bus Data Address Lines – These signals are latched at the assert edge of BSYNC L. Lines 2 and 1 are decoded for the select out puts; line 0 is used for byte selection.
5	BWTBT L	Bus Write/Byte – While the BDOUT L input is asserted, this signal indicates a byte or word operation: asserted = byte, unas- serted = word. Decoded with BDOUT L and latched BDALC L, BWTBT L is used to form OUTLB L and OUTHB L.
6	BSYNC L	Bus Synchronize – At the assert edge of this signal, address in- formation is trapped in four latches. While unasserted, this sig- nal disables all outputs except the vector term of BRPLY L.
7	BDIN L	Bus Data In – This is a strobing signal to effect a data input transaction. BDIN L generates BRPLY L through the delay cir- cuit and INWD L.
8	BRPLY L	Bus Reply – This signal is generated through an RC delay by VECTOR H, and strobed by BDIN L or DBOUT L, and
		BSYNC L and latched ENB H.
9 	BDOUT L	Bus Data Out – This is a stobing signal to effect a data output transaction. Decoded with BWTBT L and BDALO, it is used to form OUTLB L and OUTHB L. BDOUT L generates BRPLY L through the delay circuit.
11	INWDL	In Word – Used to gate (read) data from a selected register onto the data bus. It is enabled by BSYNC L and strobed by BDIN L.
12 13	OUTLB L OUTHB L	Out Low Byte, Out High Byte – Used to load (write) data into the lower, higher, or both bytes of a selected register. It is en- abled by BSYNC L and the decode of BWTBT L and latched BDAL0 L. It is strobed by BDOUT L.
14 15 16 17	SELO L SEL2 L SEL4 L SEL6 L	Select Lines – One of these four signals is true as a function of BDAL2 L and BDAL1 L if ENB H is asserted at the assert edge of BYSNC L. They indicate that a word register has been selected for a data transaction. These signals never become as- serted except at the assertion of BSYN L (then only if ENB H is asserted at that time) and, once asserted, are not negated until BSYNC L is negated.
18	RXCX	External Resistor Capacitor Node – This node is provided to vary the delay between the BDIN L, BDOUT L, and VECTOR H inputs and BRPLY L output. The external resistor should be tied to V_{cc} and the capacitor to ground. As an output, it is the logical inversion of BRPLY L.

Pin	Signal	Description	a series a	
19	ENB H	Enable – This signal is latched at the a L and is used to enable the select outp of BRPLY L.	asserted edge of BS outs and the address	YNC term

 Table C-2
 DC004 Pin/Signal Descriptions (Cont)

Maximum current required from the V_{cc} supply is 100 mA.

Figure C-3 is a simplified logic diagram of the DC005 IC. Signal and pin definitions for the DC005 are shown in Table C-3.

C.5 26LS32 QUAD DIFFERENTIAL LINE RECEIVER

The 26LS32 line receiver is a 16-pin DIP device. Terminal connections are shown in Figure C-4.

C.6 8640 UNIBUS RECEIVER

The 8640 is a quad 2-input NOR. Its equivalent circuit is shown in Figure C-5.

C.7 8881 NAND

The 8881 is a quad 2-input NAND. The schematic and pin identifications are shown in Figure C-6.

C.8 9636A DUAL LINE DRIVER

The 9636A is an 8-pin DIP device specified to satisfy the requirements of EIA standards RS-423-A and RS-232-C. Additionally, it satisfies the requirements of CCITT V.28, V.10 and the federal standard FIPS 1030.

The output slew rates are adjustable by a single external resistor connected from pin 1 to ground.

The logic diagram and terminal identification are shown in Figure C-7.


C.9 9638 DUAL DIFFERENTIAL LINE DRIVER

The 9638 is an 8-pin DIP device specified to satisfy the requirements of EIA RS-422-A and CCITT V.11 specifications.

The logic diagram and terminal identification are shown in Figure C-8.

DC005 TRANSCEIVER

ì

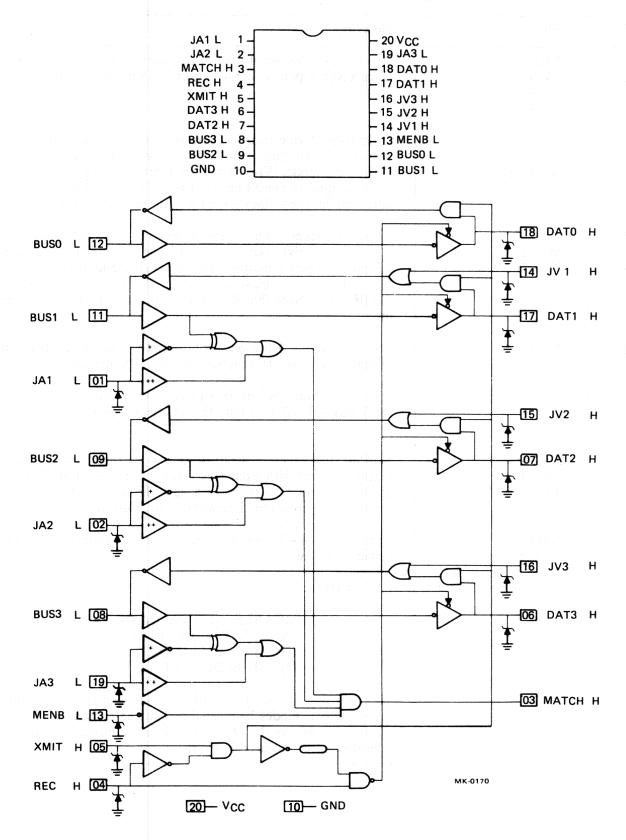






Table C-3 DC005 Pi	n/Signal Descriptions
--------------------	-----------------------


Pin	Signal	Description
12 11 9 8	BUS 0 L BUS 1 L BUS 2 L BUS 3 L	Bus Data – This set of four lines constitutes the bus side of the transceiver. Open-collector output; high-impedance inputs. Low = 1.
18 17 7 6	DAT0 H DAT1 H DAT2 H DAT3 H	Peripheral Device Data – These four tri-state lines carry the inverted received data from BUS (3:0) when the transceiver is in the receive mode. When in transmit data mode, the data carried on these lines is passed inverted to BUS (3:0). When in the disabled mode, these lines go open (high impedance). High = 1.
14 15 16	JV 1 H JV 2 H JV 3 H	Vector Jumpers – These inputs, with internal pull-down resist- ors, directly drive BUS (3:1). A low or open on the jumper pin causes an open condition on the corresponding BUS pin if XMIT H is low. A high causes a one (low) to be transmitted on the BUS pin. Note that BUS 0 L is not controlled by any jumpr input.
13	MENB L	Match Enable – A low on this line enables the MATCH output. A high forces MATCH low, overriding the match circuit.
3	МАТСН Н	Address Match – When BUS (3:1) matches with the state of JA (3:1) and MENB L is low, this output is open; otherwise, it is low.
1 2 19	JA 1 L JA 2 L JA 3 L	Address Jumpers – A strap to ground on these inputs allows a match to occur with a one (low) on the corresponding BUS line; an open allows a match with a zero (high); a strap to V_{cc} disconnects the corresponding address bit from the comparison.
5 4	XMIT H REC H	Control Inputs – These lines control the operational of the trans- ceiver as follows.
	and the second sec	REC XMIT
		00DISABLE: BUS and DAT open01XMIT DATA: DAT to BUS10RECEIVE: BUS to DAT11RECEIVE: BUS to DAT
		To avoid tri-state overlap conditions, an internal circuit delays the change of modes between Transmit data mode, and delays tri-state drivers on the DAT lines from enabling. This action is independent of the disable mode.

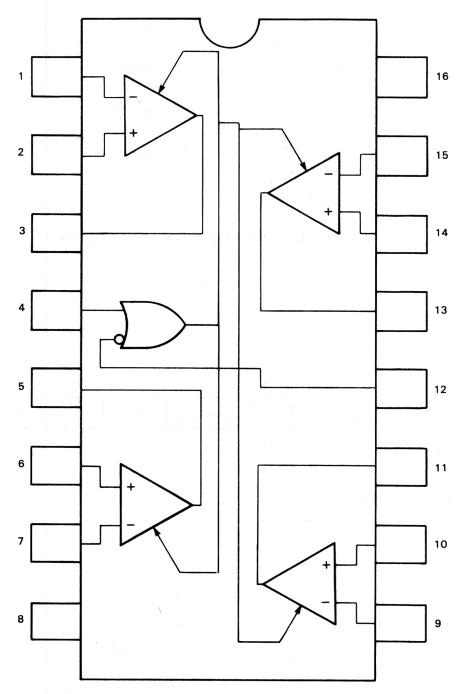





1. INPUT A	16. POSITIVE SUPPLY VOLTAGE (VCC)	
2. INPUT A	15. INPUT B	
3. OUTPUT A	14. INPUT B	
4. ENABLE	13. OUTPUT B	
5. OUTPUT C	12. ENABLE	
6. INPUT C	11. OUTPUT D	
7. INPUT C	10. INPUT D	
8. GROUND	9. INPUT D	
	MK-1340	

Figure C-4 26LS32 Terminal Connection Diagram and Terminal Identification

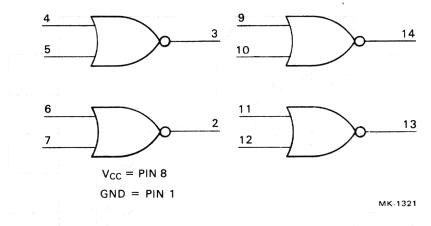




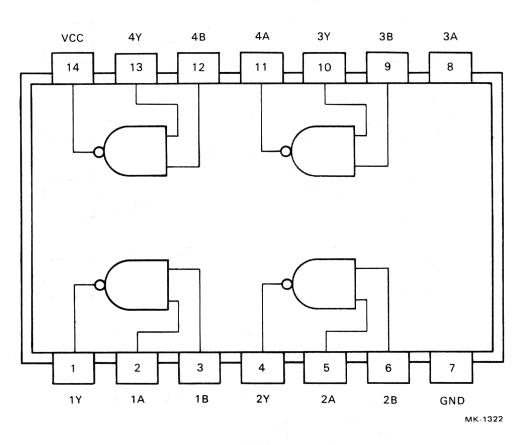



C-10

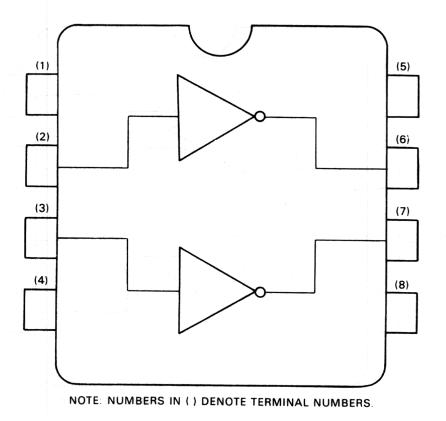


TERMINAL IDENTIFICATION

(1) WAVESHAPE CONTROL (RISE AND FALL TIME)
 (2) INPUT A
 (3) INPUT B
 (4) POWER AND SIGNAL GROUND
 (5) NEGATIVE SUPPLY VOLTAGE
 (6) OUTPUT B
 (7) OUTPUT A
 (8) POSITIVE SUPPLY VOLTAGE (V_{CC})

MK-1323

Figure C-7 9636A Logic Diagram and Terminal Identification

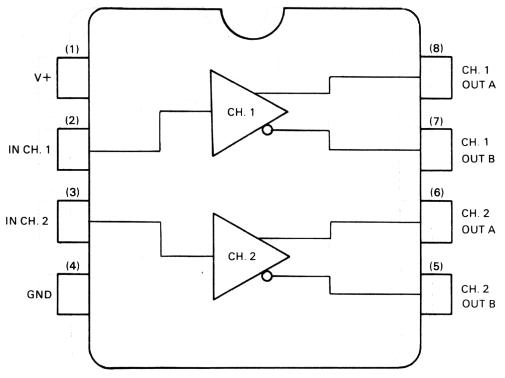

~



TERMINAL IDENTIFICATION

1. POSITIVE SUPPLY VOLTAGE
2. CHANNEL 1 INPUT
3. CHANNEL 2 OUTPUT
4. SUPPLY AND SIGNAL GROUND
5. CHANNEL 2 INVERTED OUTPUT
6. CHANNEL 2 NON INVERTED OUTPUT
7. CHANNEL 1 INVERTED OUTPUT
8. CHANNEL 1 NON INVERTED OUTPUT

MK-1324

Figure C-8 9638 Logic Diagram and Terminal Identification

C-12

APPENDIX D PROGRAMMING EXAMPLES

Two examples are included in this appendix. The first is an example for bit-oriented protocols, and the second is an example for byte count-oriented protocols.

These are only examples and are not intended for any other purpose.

	.TITLE DPV11 DPV-11 DDM FOR BIT ORIENTED PROTOCOLS .IDENT /X00/
	IGHT (C) 1980 BY AL EQUIPMENT CORPORATION, MAYNARD, MASS.
ý Xira	EXAMPLE OF AN APPLICATION RSX-11M BIT ORIENTED DPV-11 DEVICE DRIVER *** NOTE - THIS IS NOT A RUNNING DRIVER
	.MCALL HWDDF\$,\$INTSX,\$INTXT,MDCDF\$,CCBDF\$,TMPDF\$,ASYRET,SYNRET
	HWDDF\$; DEFINE THE HARDWARE REGISTERS CCBDF\$: DEFINE THE CCB OFFSETS magained to be below
; ; ;	DEVICE CHARACTERISTICS DEFINED IN -D.DCHR-
DC.HDX	= 000001 ; HALF-DUPLEX LINE INDICATOR (WORD #0)
DC.PRT	= ØØØØØ7 ; PROTOCOL SELECTION FIELD (WORD #1) = ØØØ©1Ø ; MULTI-POINT CONFIGURATION (WORD #1)
DC.MPT	= ØØØØ1Ø ; MULTI-POINT CONFIGURATION (WORD #1)
DC.SEC	= 000020 ; MULTI-POINT SECONDARY MODE (WORD #1) = 000020 ; MULTI-POINT SECONDARY MODE (WORD #1) = 000040 ; STATION ADDESS 16 BITS (WORD #1)
DC.SPS	= ØØØØ4Ø ; STATION ADDRESS IS 16 BITS (WCRD #1) = ØØØØ13 ; SDLC PRIMARY STATION (COMPOSITE)
DC.SSS	= ØØØØ33 ; SDLC SECONDARY STATION (COMPOSITE)
; ;	DEVICE STATUS FLAGS DEFINED IN -D.FLAG-
DD.ENB	== ØØ1 ; IF ZERO, LINE HAS BEEN ENABLED
DD.STR	== ØØ2 ; IF ZERO, LINE HAS BEEN STARTED
DD.EOM	== CF.EOM ;(UNUSED)
DD.SOM	== CF.SOM ;(UNUSED)
DD.ABT	== 020 ; TRANSMIT ABORTED DUE TO UNDERRUN
DD. TRN	== CF.SIN ; IRANSMIT SINC-TRAIN REQUIRED == CF.TRN • TRANSMIT LINE THRN_ADOUND DECUIDED
DD.ACT	== 200 ; TRANSMITTER READY FOR NEXT FRAME
DD.DIS	<pre>== ØØ2 ; IF ZERO, LINE HAS BEEN ENABLED == ØØ2 ; IF ZERO, LINE HAS BEEN STARTED == CF.EOM ;(UNUSED) == Ø2Ø ; TRANSMIT ABORTED DUE TO UNDERRUN == CF.SYN ; TRANSMIT ABORTED DUE TO UNDERRUN == CF.TRN ; TRANSMIT SYNC-TRAIN REQUIRED == 2ØØ ; TRANSMIT LINE TURN-AROUND REQUIRED == DD.ENB!DD.STR ; INITIAL STATUS = DISABLED, STOPPED</pre>
; ; ;	[SEL Ø] MODEM CONTROL BITS
DSCHG	= 100000 ; DATA SET CHANGE
DSRING	$= \emptyset 4 \emptyset \emptyset \emptyset \emptyset \qquad ; \text{ RING INDICATOR}$
DSCTS	= 020000; CLEAR TO SEND
	= Ø10000 ; CARRIER INDICATOR = Ø01000 ; MODEM READY
	= ØØØØ4Ø ; DATA SET INTERRUPT ENABLE
	= 000010; DATA SET LOOPBACK
DSRTS	= ØØØØØ4 ; REQUEST TO SEND
DSDTR	= ØØØØØ2 ; DATA TERMINAL READY
DSSEL ;	<pre>= ØØØØØ1 ; SELECT FREQUENCY OR REMOTE LOOPBACK [SEL Ø] RECEIVER CONTROL BITS</pre>
; ;	
RXACT	
	= ØØ2ØØØ ; RECEIVER STATUS READY = ØØØ4ØØ ; RECEIVER FLAG DETECT
	= 000400 ; RECEIVER FLAG DETECT = 000200 ; RECEIVER DONE
	= ØØØ1ØØ ; RECEIVER INTERRUPT ENABLE
RXREN	= ØØØØ2Ø ; RECEIVER ENABLE
; ;	[SEL 2] RECEIVER STATUS INPUTS
RXERR	
RXABC RXBFOV	= Ø7ØØØØ ; RECEIVER ASSEMBLED BIT COUNT = Ø1ØØØØ ; RECEIVER BUFFER OVERFLOW (SOFTWARE ERROR)
	= 004000 ; RECEIVER BOFFER OVERFLOW (SOFTWARE ERROR) = 004000 ; RECEIVER DATA OVERRUN
•	,

RXA	RT = 002000; RECEIVED ABORT
	· · · · · · · · · · · · · · · · · · ·
RXS	RM = 000400 ; RECEIVED START OF MESSAGE
;	
;	[SEL 2] MODE CONTROL OUTPUTS
:	
000	
	A = 1000000 ; ALL PARTIES ADDRESSED
DPDI	
DPS	$RP = \emptyset 20000$; STRIP SYNC OR LOOP MODE
DPSI	
	LE = 004000; IDLE MODE SELECT
	C = 3*400; USE CRC 16 ERROR DETECTION
	RC = ØØØ377 ; STATION ADDRESS OR SYNC CHARACTER
INPR	M = DPSTRP!DPCRC ; INITIAL STARTUP PARAMETERS
;	
;	[SEL 4] TRANSMITTER STATUS AND CONTROL
	[BEL 4] TRANSMITTER STATUS AND CONTROL
<i>i</i>	
	N = 150000 ; TRANSMIT CHARACTER LENGTH
	$D = \emptyset 1 \emptyset \emptyset \emptyset \emptyset$; EXTENDED ADDRESS FIELD
EXCO	N = 004000 ; EXTENDED CONTROL FIELD
	N = 003400; RECEIVE CHARACTER LENGTH
	EN = 000100; TRANSMITTER INTERRUPT ENABLE
TXR	
TXM	
TXDC	NE = 000004; TRANSMITTER DONE
TXAC	NE = 000004 ; TRANSMITTER DONE T = 000002 ; TRANSMITTER ACTIVE
TXRE	
	J - DDDDDI ; DEVICE RESEI
;	
;	[SEL 6] TRANSMITTER OUTPUT CONTROLS
;	
TXLA	FE = 100000 ; TRANSMITTER DATA LATE (UNDERRUN)
TXGC	= 004000 ; TRANSMITTER GO AHEAD
TXAE	RT = 002000 ; TRANSMITTER ABORT
	DM = 001000; TRANSMIT END OF MESSAGE
TXST	
1 10 1	; TRANSMIT START OF MESSAGE
<i>i</i>	
; PF	DCESS DISPATCH TABLE
į	
\$DXF	
	.WORD \$SDASX ; TRANSMIT ENABLE
	.WORD \$SDASR ; RECEIVE ENABLE (ASSIGN BUFFER)
	.WORD \$SDKIL ; KILL I/O ENABLE
	.WORD \$SDCTL ; CONTROL ENABLE
	.WORD \$SDTIM ; TIME OUT
	.SBTTL \$SDPRI RECEIVE INTERRUPT SERVICE ROUTINE
;+	A STATE AND A STAT
	VCTION:
	ciion.
i	
;	THE DEVICE INTERRUPT IS VECTORED BY THE HARDWARE TO THE
;	DEVICE LINE TABLE. THE '\$SDPRI' LABEL IS ENTERED VIA A
;	CALLING SEQUENCE IN THE LINE TABLE AT OFFSET 'D.RXIN'.
;	
; ON	ENTRY:
	DE - ADDRESS OF ID DDREI IN WID LIVE WARD
<i>i</i>	R5 = ADDRESS OF 'D.RDBF' IN THE LINE TABLE
;	$\emptyset(SP) = SAVED R5$
;	2(SP) = INTERRUPTED PC
;	4(SP) = INTERRUPTED PS
;	
: 00	'PUTS:
	BE - ADDRESS OF ID DDDDI IN THE FORD
	R5 = ADDRESS OF 'D.RDB2' IN THE LINE TABLE
;	D.RVAD = RECEIVER STATUS BITS FROM CSR [SEL 2]
;-	

D-3

\$SDPRI:: ;;; SAVE REGISTERS MOV R3, -(SP)MOV R4,-(SP) あっままま ・・・ お月んのロー 調知の ;;; GET CHARACTER AND FLAGS @(R5)+,R4MOV ;;; DON'T WORRY ABOUT ASSEMBLED BIT COUNT BIC #RXABC,R4 .IF DF M\$\$MGE ;;; SAVE CURRENT MAP MOV KISAR6,-(SP) ;;; MAP TO DATA BUFFER MOV (R5) + KISAR6. IFTF ;;; DECREMENT BUFFER BYTE COUNT DEC (R5) +BMI DPRBO ;;; BUFFER OVERFLOW - POST COMPLETE ;;; GET CSR+2 ADDRESS MOV 2(R5),R3 ;;; ERROR OR END-OF-MESSAGE ? ACTOR BIT #RXSRDY, -(R3);;; YES - POST RECEIVE COMPLETE BNE DPRCP ;;; STORE CHARACTER IN RECEIVE BUFFER MOVB R4, @ (R5) +.IFT ;;; RESTORE PREVIOUS MAPPING MOV (SP)+,KISAR6 .IFTF ;;; ADVANCE BUFFER ADDRESS INC -(R5) ;;; RESTORE REGISTERS MOV (SP) + , R4MOV (SP) + , R3;;; ... ;;; EXIT THE INTERRUPT SINTXT ;;; BUFFER OVERRUN HAS OCCURRED DPRBO: BIS #RXBFOV,R4 ;;; SET (SOFTWARE) ERROR INDICATOR ;;; END-OF-MESSAGE OR ERROR INDICATION DPRCP: .IFT ;;; RESTORE PREVIOUS MAPPING MOV (SP) + , KISAR6. ENDC ;;; SAVE STATUS FLAGS IN 'D.RVAD' MOV R4, (R5) +;;; GET CSR+2 ADDR + POINT TO 'D.RPRI' (R5) + , R4MOV #RXITEN, -(R4);;; CLEAR RECEIVER INTERRUPT ENABLE BIC ;;; RESTORE R4 SO '\$INTSV' IS HAPPY MOV (SP) + , R4;;; AND R3 MOV (SP) + , R3;;; DO A TRICKY \$INTSV (R5 SAVED BUT NOT R4) \$INTSX ; CHECK FOR ERRORS, POST RECEIVE COMPLETE, ASSIGN NEW BUFFER ; ; MOV R3, -(SP);; SAVE AN ADDITIONAL REGISTER ;; CCB ADDRESS TO R4 (R5 POPPED) MOV (R5),R4 ;; BACK UP TO THE RESI DUAL COUNT ADD #D.RCNT-D.RCCB,R5 ;; COMPUTE RECEIVED FRAME BYTE COUNT SUB $(R5) + C \cdot CNT1(R4)$;; SET R3 FOR COMPLETION STATUS CLR R3 ;; ANY ERRORS REPORTED ? BIC #61777,(R5)+ ;; NO -- POST RECEIVE COMPLETE O.K. BEO 40\$;; SHIFT ERROR INDICATORS... ASR -(R5) ;; ... TWO PLACES RIGHT (R5) + ASR ;; SHIFT 'RXABRT' INTO C-BIT ASRB -(R5) ;; USE INDICATORS AS TABLE INDEX MOVB (R5) + , R3RCVERR-2(R3),R3 ;; R3 NOW = CCB STATUS FLAGS MOV ;; FRAME NOT ABORTED - POST COMPLETE BCC 405 D.RABT-D.RDB2(R5) ;COUNT NUMBER OF ABORTED FRAMES INC ;; RE-INITIALIZE WITH THE SAME BUFFER CALL RBFUSE ;; RE-ENABLE INTERRUPTS FOR NEXT FRAME BR 60\$ C.STS(R4),R3;; INCLUDE RE-SYNC STATUS, IF ANY 40\$: BIS ;; SAVE STATUS REPORTED TO DLC MOV R3, -(SP)CALL \$DDRCP ;; POST RECEIVE COMPLETE ;; RECOVER COMPLETION STATUS MOV (SP)+,R3;; ASSIGN NEW CCB TO THE RECEIVER CALL RBFSET

DREXIT ;; FAILED - LEAVE RECEIVER INACTIVE BCS ;; WAS AN ERROR REPORTED TO DLC ? TST R3 ;; YES - DISABLE RCVR FOR RE-SYNC BMI DRCLRA MOV 60\$: -(R5),R3 ;; RECEIVER CSR [SEL 2] TO R3 ;; RE-ENABLE RECEIVER INTERRUPTS BIS #RXITEN,-(R3) DREXIT: ;; RESTORE REGISTER R3 MOV (SP)+,R3RETURN ;; EXIT TO THE SYSTEM ;+ ; DRCLRA: MOMENTARILY RESET 'RXREN' FLAG IN ORDER TO FORCE RECEIVER RE-SYNCHRONIZATION. THIS IS REQUIRED FOR ANY ERROR WHICH TERMINATES THE RECEIVE OPERATION IN MID-FRAME. ; ON ENTRY: R5 = ADDRESS OF 'D.RCCB' IN THE LINE TABLE R4 = ADDRESS OF 'C.STS' IN THE NEWLY-ASSIGNED CCB ; (SP) = SAVED R3 VALUE ; ;-DRCLRA: ;; RCVR CSR ADDRESS [SEL 2] TO R3 ;; RESET RCVR ENABLE FOR RE-SYNC MOV -(R5),R3 BIC #RXREN, -(R3)BIS #CS.RSN,(R4) ;; SET RE-SYNC IN CCB 'C.STS' ;; RE-ENABLE THE RECEIVER BIS #RXREN!RXITEN,(R3) BR DREXIT ;; RESTORE R3 AND EXIT .SBTTL \$SDPTI -- TRANSMIT INTERRUPT SERVICE ROUTINE ;+ ; FUNCTION: THE DEVICE INTERRUPT IS VECTORED BY THE HARDWARE TO THE ; DEVICE LINE TABLE. THE '\$SDPTI' LABEL IS ENTERED VIA A ; CALLING SEQUENCE IN THE LINE TABLE AT OFFSET 'D.TXIN'. ONCE FRAME TRANSMISSION IS INITIATED, EACH INTERRUPT IS HANDLED BY THE ROUTINE ADDRESSED VIA THE 'D.TSPA' WORD. ON ENTRY: : R5 = ADDRESS OF 'D.TCSR' IN THE LINE TABLE $\emptyset(SP) = SAVED R5$ 2(SP) = INTERRUPTED PC 4(SP) = INTERRUPTED PS ; ON EXIT: ; R5 = ADDRESS OF 'D.TCCB' IN THE LINE TABLE ; ; -\$SDPTI:: MOV R4, -(SP);;; SAVE R4 (R5) + , R4MOV ;;; GET TRANSMITTER CSR ADDRESS (R4) + ;;; POINT TO [SEL 6] + TEST UNDERRUN TST ;;; GO TO CORRECT STATE PROCESSOR JMP @(R5)+ - - - - - - - - - -MONITOR CSR FOR 'CLEAR TO SEND' ; CURRENT STATE = ; ;- - - -_ _ _ _ _ _ TISCTS: #DSCTS,-6(R4) BIT ;;; IS 'CLEAR TO SEND' ACTIVE YET ? ;;; YES - START TO SEND THE FRAME BNE TISIFL BITB #DD.SYN,D.FLAG-D.TCNT(R5) ;;; SYNC-TRAIN REQUIRED ? BEO TISIFX ;;; NO -- SEND FLAGS UNTIL 'CTS'

MOV #TXSTRM! TXENDM, (R4) ;;; START + END SENDS SYNC STRING BR TISEXT - - - - - - - - - - - - -;-------CURRENT STATE = SEND INITIAL FRAME 'FLAG' ; ;- -_____ TISIFL: MOV #TISTRT,-(R5) ;;; NEXT STATE = SEND ADDRESS BYTE TISIFX: MOV #TXSTRM,(R4) SEND AN SDLC FLAG CHARACTER BR TISEXT CURRENT STATE = SEND ADDR BYTE FOLLOWING 'FLAG'; ; ;------وقدر بداريد الدائية الدربية الدائية إليان الدائية وقدر الدائية المائية المائية المائية المائية المائية TISTRT: (R5) ;;; DECREMENT COUNT FOR ADDR BYTE D.TADC-D.TCNT(R5),(R4) ;;; SEND ADDR, CLEAR 'TXSTRM' DEC MOV ;;; NEXT STATE = DATA TRANSFER MOV #TISDAT,-(R5) BR TISEXT _ _ _ _ _ _ _ _ _ ; TRANSFER FRAME DATA BYTES CURRENT STATE = ; ; ;-----_ _ _ _ _ _ _ _ _ _ _ _ _ _ _ _ _ _ TISDAT: BMI TISLAT ;;; UNDERRUN - ABORT AND RE-TRANSMIT (R5)+ DEC (R5) + ;;; DECREMENT DATA BYTE COUNT BMI TISEND ;;; ALL DONE - SEND END-MSG SEQUENCE .IF DF M\$\$MGE MOV KISAR6,-(SP) ;;; SAVE CURRENT MAPPING (R5)+,KISAR6 ;;; MAP TO THE TRANSMIT BUFFER MOV .IFTF ;;; ADVANCE THE BUFFER ADDRESS INC (R5) ;;; NEXT CHARACTER TO BE SENT @(R5)+,(R4) MOVB .IFT MOV (SP) + , KISAR6;;; RESTORE PREVIOUS MAPPING .ENDC ;;; COMMON LEVEL-7 INTERRUPT EXIT TISEXT: MOV (SP)+,R4 ;;; RESTORE R4 ;;; EXIT INTERRUPT SERVICE SINTXT ; -. -: CURRENT STATE = DATA BYTE-COUNT EXHAUSTED : ;-----TISEND: ;;; TRANSMIT END-OF-MSG SEQUENCE
;;; ADJUST R5 AND CLEAR 'D.TCNT' #TXENDM,(R4) MOV INC -(R5) ;;; NEXT STATE = IDLE FLAGS (ASSUMED) ;;; TEST FOR LINE TURN-AROUND #TISFLG,-(R5) MOV #TISFLG,-(RS) D.FLAG-D.TSPA(R5) ASLB ;;; NO -- IDLE THE LINE WITH FLAGS BPL TISEXT ;;; YES - SEND PADS, THEN DISABLE #TISPAD,(R5) MOV BR TISEXT ------CURRENT STATE = SEND 'ABORT' AS PAD AFTER 'FLAG'; ; ;- -_ _ _ _ _ _ _ _ _ _ _ _ _ _ _ _ _ ; ------TISPAD: D.FLAG-D.TCNT(R5) ;;; RESET THE DEVICE FLAG BYTE #TISCLR,-(R5) ;; NEXT STATE = SEND SECOND PAD CLRB MOV ;;; SET 'TXABRT' TO SEND A PAD #TXABRT,(R4) MOV TISEXT BR - - - - - - - - - - - -; CURRENT STATE = SEND SECOND 'ABORT' AS PAD ; ;- -_ _ _ _ _ _ _ _ _ _ _ TISCLR: MOV #TISRTS,-(R5) ;;; NEXT STATE = DROP 'REQUEST TO SEND'

D-6

TISCLX: #TXABRT,(R4) ;;; SETUP TO SEND ANOTHER 'ABORT' CHAR
#TXREN,-(R4) ;;; DISABLE THE TRANSMITTER MOV BIC BR TISEXT - - : CURRENT STATE = DROP REQUEST TO SEND + EXIT ; ; TISRTS: #DC.HDX,D.DCHR-D.TCNT(R5) ;;; HALF-DUPLEX CHANNEL ? BIT ;;; NO -- LEAVE 'RTS' ACTIVE BEQ TISDON BIC #DSRTS,-6(R4) ;;; DROP 'REQUEST TO SEND' LINE ;;; POST TRANSMIT COMPLETE BR TISDON _ _ _ _ _ _ _ _ _ _ _ _ _ ;-CURRENT STATE = TRANSMITTER DATA UNDERRUN ; ; والحار الجاريجي والماريجين والمترا المارا المارا المار -: TISLAT: MOV #TISDON,-(R5) ;;; NEXT STATE = RE-TRANSMIT MOVB #DD.ABT,D.FLAG-D.TSPA(R5) ;;; THIS FRAME WAS ABORTED INC D.TURN-D.TSPA(R5) ;;; COUNT THE ERROR EVENTS ;;; SEND PAD, DISABLE TRANSMITTER TISCLX BR والوادي المرابع المرابع المرابع المراجع المرتجر ومراجع المرابع المرابع الموالية تمورها : CURRENT STATE = IDLE FLAGS BETWEEN FRAMES ; , and a second TISFLG: MOV #TXSTRM,(R4) ;;; CLEAR 'TXENDM', IDLE MOVB #DD.ACT,D.FLAG-D.TCNT(R5) ;;; TRANSMITTER IS ACTIVE ;;; CLEAR 'TXENDM', IDLE FLAGS ; CURRENT STATE = POST COMPLETE OR RE-TRANSMIT ; ; - - - - - - - -TISDON: #D.TPRI-D.TCNT,R5 ;;; ADJUST LINE TABLE POINTER ADD BIC #TXITEN,-(R4) ;;; DISABLE 'TXDONE' INTERRUPTS MOV (SP)+,R4 ;;; RESTORE R4 FOR PRIORITY DRO \$INTSX ;; '\$INTSV' W/O R4 SAVED (POPS ;;; RESTORE R4 FOR PRIORITY DROP ;;; '\$INTSV' W/O R4 SAVED (POPS R5) ;; SAVE AN ADDITIONAL REGISTER MOV R3,-(SP) MOV (R5),R4 ;; ACTIVE CCB ADDRESS TO R4 CLR (R5) + ;; THIS CCB IS NO LONGER ACTIVE BITB #DD.ABT, D.FLAG-D.TCBQ(R5) ;; WAS THE FRAME ABORTED ? ;; YES - SETUP RE-TRANSMISSION ;; TRANSMIT KILL IN PROGRESS ? TRSTRT BNE D.KCCB-D.TCBQ(R5) TST CKILLT ;; YES - RETURN CCB 5 10 1 R3 ;; SET COMPLETION STATUS = SUCCESS \$DDXMP ;; POST TRANSMIT COMPLETE TO THE DLC (R5),R4 ;; FIRST CCB ON SECONDARY CHAIN TREXIT ;; NONE THERE - TRANSMITTER IDLE -- BEMOVE CCB FROM SECONDARY CHAIN BNE ;; YES - RETURN CCB'S TO THE DLC CLR CALL MOV BEO (R4),(R5) MOV CURRENT STATE = START UP FRAME TRANSMISSION ; : TRSTRT: ;; CLEAR CCB LINKAGE WORD CLR (R4) R4 - (R5) - (R5);; SETUP AS THE ACTIVE CCB MOV ;; SKIP BACK OVER 'D. TPRI' TST -(R5) ADD #C.FLG1,R4 ;; POINT TO THE CCB BUFFER FLAGS BISB (R4),D.FLAG-D.TPRI(R5) ;; SAVE FLAGS FOR LEVEL-7 USE BICB #DD.ABT,D.FLAG-D.TPRI(R5) ;MAKE SURE 'ABORT' FLAG IS OFF -(R4), D.TCNT-D.TPRI(R5) ;; SET TRANSMIT BYTE COUNT MOV -(R5) -(R4),-(R5) ;; INITIALIZE 'D.TADC' WORD ;; SET TRANSMIT BUFFER ADDR CLR MOV ;; SET TRANSMIT BUFFER ADDRESS

1.5

.IF	DF M\$\$M	GE
.IF	MOV MOV MOV	-(R4),-(R5);; SET TRANSMIT BUFFER RELOCATIONKISAR6,-(SP);; SAVE THE CURRENT APR6 MAPPING(R5)+,KISAR6;; MAP TO THE TRANSMIT BUFFER
.1F	MOVB	@(R5)+,(R5) ;; MOVE ADDRESS BYTE TO 'D.TADC'
. 1 F . EN	MOV	(SP)+,KISAR6 ;; RESTORE PREVIOUS APR6 MAPPING
	ADD TSTB BPL	#D.TSPA-D.TADC,R5;; BACK UP TO STATE PROCESSOR CELLD.FLAG-D.TSPA(R5);; IS THE TRANSMITTER READY NOW ?20\$;; NO ENABLE IT, THEN START
	MOV BR	<pre>#TISTRT,(R5) ;; INITIAL STATE = SEND ADDR BYTE 40\$;; ENABLE INTERRUPTS AND EXIT</pre>
20\$:	MOV BIS BIS	-2(R5),R3 ;; TRANSMITTER CSR [SEL 4] TO R3 #DSRTS,-4(R3) ;; ASSERT 'REQUEST TO SEND' #TXREN,(R3)+ ;; ENABLE THE TRANSMITTER
	MOV	<pre>#TISCTS,(R5) ;; INITIAL STATE = WAIT FOR 'CTS'</pre>
40\$:	BIS	<pre>#TXITEN,@-(R5) ;; RE-ENABLE TRANSMIT INTERRUPTS</pre>
TREXIT:		(SP)+,R3 ;; RESTORE R3 FROM ENTRY ;; EXIT WHEREVER APPROPRIATE, ASYNC
; ; ; CKILLT:		<pre>STATE = TRANSMIT KILL OR TIMEOUT ; #CS.ERR!CS.ABO,-(SP) ;; TRANSMIT COMPLETION STATUS</pre>
СКТТМО:		
ckrimo.	BIC MOV	<pre>#TXREN,@D.TCSR-D.TCBQ(R5) ;; DISABLE TRANSMITTER (R5),(R4) ;; ADD SECONDARY CHAIN TO PRIMARY (R5)+ ;; CLEAR SECONDARY CHAIN POINTER</pre>
20\$:	MOV MOV CLR CALL MOV BNE TST	(SP),R3;; COMPLETION STATUS TO R3(R4),-(SP);; NEXT CCB ADDRESS TO STACK(R4);; MAKE SURE LINK WORD IS ZERO\$DDXMP;; POST A CCB COMPLETE W/ERROR(SP)+,R4;; NEXT CCB ADDRESS TO R420\$;; MORE TO GO - CONTINUE(SP)+;; CLEAN STATUS OFF THE STACK
	MOV BEQ CLR CLR	(R5),R4;; KILL CCB ADDRESS TO R4TREXIT;; NONE - RESTORE R3 AND EXIT(R5);; KILL NO LONGER IN PROGRESSR3;; STATUS = SUCCESSFUL
	CMPB BNE CALL BR	<pre>#FC.KIL,C.FNC(R4) ;; KILL-I/O OR CONTROL FUNCTION ? 40\$;; CONTROL - POST IT COMPLETE \$DDKCP ;; POST KILL-I/O COMPLETE TREXIT ;; RESTORE R3 AND EXIT</pre>
4Ø\$:	CALL BR	\$DDCCP;; POST CONTROL COMPLETETREXIT;; RESTORE R3 AND EXIT
• •	.SBTTL	\$SDASX TRANSMIT ENABLE ENTRY
;+ ; FUNCT	ION:	
; ;	'\$SDASX	' IS ENTERED (VIA THE DISPATCH TABLE) TO QUEUE A

D-8

CCB CONTAINING AN SDLC FRAME TO BE TRANSMITTED. IF THE ; TRANSMITTER IS BUSY, THE CCB IS QUEUED TO THE SECONDARY ; CCB CHAIN. IF NOT, THE TRANSMITTER IS ENABLED TO START ; TRANSMITTING THE NEW FRAME. ï ; ON ENTRY: ; R4 = ADDRESS OF TRANSMIT ENABLE CCB ï R5 = ADDRESS OF DEVICE LINE TABLE ; **PS = PRIORITY OF CALLING DLC PROCESS** ; ; ON EXIT: ; ; ALL REGISTERS ARE UNPREDICTABLE ; ;-\$SDASX:: MOV R3,-(SP) ;; SAVE R3 FOR EXIT VIA 'TRSTRT' D.TCSR(R5),R3 MOV ;; TRANSMIT CSR ADDRESS [SEL 4] TO R3 ;; DISABLE TRANSMITTER INTERRUPTS BIC #TXITEN,(R3) ADD #D.TCCB,R5 ;; POINT TO ACTIVE CCB ADDRESS CELL TST (R5) +;; IS THERE AN ACTIVE CCB ? BEQ TRSTRT ;; NO -- START UP THE TRANSMITTER MOV R4 - (SP);; SAVE POINTER TO FIRST CCB 20\$: MOV R5, R4 ;; COPY THE CCB ADDRESS TO R4 MOV (R4),R5 ;; ADDRESS OF THE NEXT CCB TO R5 BNE 20\$;; LOOP UNTIL WE FIND THE END MOV (SP) + (R4);; LINK NEW CCB TO END OF CHAIN CLR 0(R4) +;; MARK NEW END OF CCB CHAIN BIS #TXITEN,(R3) ;; RE-ENABLE TRANSMITTER INTERRUPTS BR TREXIT ;; RESTORE R3 AND EXIT .SBTTL \$SDASR -- RECEIVE ENABLE AFTER BUFFER WAIT ;+ FUNCTION: ; THIS ROUTINE IS CALLED BY THE BUFFER POOL MANAGER WHEN A BUFFER ALLOCATION REQUEST CAN BE SATISFIED, FOLLOWING ; AN ALLOCATION FAILURE AND A CALL TO 'SRDBWT'. ; ON ENTRY: ; R4 = ADDRESS OF CCB AND RECEIVE BUFFER**R5 = ADDRESS OF DEVICE LINE TABLE** ON EXIT: ; R5 = ADDRESS OF 'D.RCCB' IN THE LINE TABLE ; R4 = ADDRESS OF 'C.STS' IN THE CCB ; (SP) = SAVED VALUE OF R3 ; ; -\$SDASR:: #D.RDB2,R5 ADD ;; POINT TO SECOND RCVR-CSR WORD CALL RBFUSE ;; ASSIGN BUFFER TO THE RECEIVER BIS #CS.BUF, (R4) ;; PREV. ALLOC. FAILURE TO CCB 'C.STS' ;; PUSH R3 FOR EXIT AT 'DREXIT', ABOVE MOV R3, -(SP)JMP DRCLRA ;; RESET AND ACTIVATE THE RECEIVER ;+ ; \$SDSTR -- START UP DEVICE AND LINE ACTIVITY ; -

\$SDSTR:	•		
<i>VDDDINI</i>		#DD.ENB,D.FLAG(R5) 60\$;; HAS THE LINE BEEN ENABLED ? ;; NO REJECT THE 'START'
	MOV MOV BIS	D.RDBF(R5),R3 ;; D.STN(R5),(R3) ;; #RXREN,-(R3) ;;	RECEIVER CSR ADDR [SEL 2] TO R3 SET ADDRESS BYTE + OPERATING MODE ENABLE THE RECEIVER
	CALL BCS BIS	RBFSET ;; 20\$;; #RXITEN,(R3) ;;	SAVE LINE TABLE START ADDRESS ADJUST R5 FOR BUFFER ROUTINE ASSIGN A RECEIVE CCB AND BUFFER FAILED – START THE TRANSMITTER ENABLE RECEIVER INTERRUPTS
20\$: 60\$:	BIS BR MOV	<pre>#DSRTS,(R3) CTLCMP #CS.ERR!CS.DIS,R3</pre>	;; RECOVER LINE TABLE START ;; LINE HAS BEEN STARTED ;; CHECK THAT ASSUMPTION ;; CORRECT - STARTUP COMPLETE ;; ASSERT 'REQUEST TO SEND' LINE ;;AND POST START COMPLETE ;; STATUS = LINE DISABLED
	BR	CTLERR	;; RETURN ERROR W/COMPLETION
DP.NOP: CTLCMP:		1999 - 1999 -	CONTROL FUNCTION = NO-OPERATION
CTLERR:	CLR	R3 ;;	STATUS = SUCCESSFUL
CILERK:			RECOVER SAVED R4 VALUE SYNCHRONOUS RETURN
	.SBTTL	\$SDSTP STOP D	EVICE AND LINE ACTIVITY
;	' S T O	P' CONTRO	L FUNCTION :
;	'STO	P' CONTRO	L FUNCTION ;
;; ; \$SDSTP:	'STO : MOV MOV	P ' C O N T R O D.RDBF(R5),R3 ;; #DSDTR,-(R3) ;;	L FUNCTION ;
;	'STO MOV CLR MOV BEQ	P ' C O N T R O D.RDBF(R5),R3 ;; #DSDTR,-(R3) ;; 4(R3) ;; D.RCCB(R5),R4 ;; 20\$;;	L FUNCTION ; ; RECEIVER CSR ADDR [SEL 2] TO R3 DISABLE RECEIVER, LEAVE 'DSDTR' ACTIVE
; \$SDSTP:	' S T O MOV CLR MOV BEQ CALL	P ' C O N T R O D.RDBF(R5),R3 ;; #DSDTR,-(R3) ;; 4(R3) ;; D.RCCB(R5),R4 ;; 20\$;; \$RDBRT ;; D.RCCB(R5) ;;	L FUNCTION ; RECEIVER CSR ADDR [SEL 2] TO R3 DISABLE RECEIVER, LEAVE 'DSDTR' ACTIVE DISABLE TRANSMITTER ACTIVE RECEIVE CCB TO R4 NONE THERE - SKIP IT
; \$SDSTP:	' S T O MOV CLR MOV BEQ CALL CLR CLR BISB CALL BISB	P ' C O N T R O D.RDBF(R5),R3 ;; #DSDTR,-(R3) ;; 4(R3) ;; D.RCCB(R5),R4 ;; 20\$;; \$RDBRT ;; D.RCCB(R5) ;; R4 ;; D.SLN(R5),R4 ;; \$RDBQP ;; #DD.STR,D.FLAG(R5) D.TCCB(R5)	L FUNCTION ; RECEIVER CSR ADDR [SEL 2] TO R3 DISABLE RECEIVER, LEAVE 'DSDTR' ACTIVE DISABLE TRANSMITTER ACTIVE RECEIVE CCB TO R4 NONE THERE - SKIP IT RETURN BUFFER TO THE POOL NO RECEIVE CCB ASSIGNED
; \$SDSTP:	' S T O MOV CLR MOV BEQ CALL CLR CLR CLR BISB CALL BISB TST BEQ MOV	P'CONTRO D.RDBF(R5),R3;; #DSDTR,-(R3);; 4(R3);; D.RCCB(R5),R4;; 20\$;; \$RDBRT;; D.RCCB(R5);; R4;; p.SLN(R5),R4;; \$RDBQP;; #DD.STR,D.FLAG(R5); D.TCCB(R5); CTLCMP; (SP)+,D.KCCB(R5);	L FUNCTION ; RECEIVER CSR ADDR [SEL 2] TO R3 DISABLE RECEIVER, LEAVE 'DSDTR' ACTIVE DISABLE TRANSMITTER ACTIVE RECEIVE CCB TO R4 NONE THERE - SKIP IT RETURN BUFFER TO THE POOL NO RECEIVE CCB ASSIGNED CLEAR R4 FOR PARAMETER USE SET SYSTEM LINE NUMBER IN R4 PURGE BUFFER WAIT QUEUE REQUESTS ;; LINE IS NO LONGER STARTED ;; IS THERE AN ACTIVE TRANSMIT CCB ?
; \$SDSTP:	' S T O MOV MOV CLR MOV BEQ CALL CLR CLR BISB CALL BISB CALL BISB TST BEQ MOV MOVB ASYRET	P' C O N T R O D.RDBF(R5),R3 ;; #DSDTR,-(R3) ;; 4(R3) ;; D.RCCB(R5),R4 ;; 20\$;; \$RDBRT ;; D.RCCB(R5) ;; R4 ;; D.SLN(R5),R4 ;; \$RDBQP ;; #DD.STR,D.FLAG(R5) D.TCCB(R5) CTLCMP (SP)+,D.KCCB(R5) #1,(R5) \$SDENB ENABLE	L FUNCTION ; RECEIVER CSR ADDR [SEL 2] TO R3 DISABLE RECEIVER, LEAVE 'DSDTR' ACTIVE DISABLE TRANSMITTER ACTIVE RECEIVE CCB TO R4 NONE THERE - SKIP IT RETURN BUFFER TO THE POOL NO RECEIVE CCB ASSIGNED CLEAR R4 FOR PARAMETER USE SET SYSTEM LINE NUMBER IN R4 PURGE BUFFER WAIT QUEUE REQUESTS ;; LINE IS NO LONGER STARTED ;; IS THERE AN ACTIVE TRANSMIT CCB ? ;; NO POST CONTROL COMPLETE ;; SAVE THE CONTROL CCB FOR TIMEOUT ;; MAKE SURE THE TIMER IS ACTIVE ;; RETURN WITH ASYNCHRONOUS COMPLETION THE LINE AND DEVICE
; \$SDSTP: 20\$: ;	S T O MOV MOV CLR MOV BEQ CALL CLR CLR BISB CALL BISB CALL BISB TST BEQ MOV MOVB ASYRET .SBTTL E N A	P' C O N T R O D.RDBF(R5),R3 ;; #DSDTR,-(R3) ;; 4(R3) ;; D.RCCB(R5),R4 ;; 20\$;; \$RDBRT ;; D.RCCB(R5) ;; R4 ;; D.SLN(R5),R4 ;; \$RDBQP ;; #DD.STR,D.FLAG(R5) D.TCCB(R5) CTLCMP (SP)+,D.KCCB(R5) #1,(R5) \$SDENB ENABLE B L E L I N E	L FUNCTION ; RECEIVER CSR ADDR [SEL 2] TO R3 DISABLE RECEIVER, LEAVE 'DSDTR' ACTIVE DISABLE TRANSMITTER ACTIVE RECEIVE CCB TO R4 NONE THERE - SKIP IT RETURN BUFFER TO THE POOL NO RECEIVE CCB ASSIGNED CLEAR R4 FOR PARAMETER USE SET SYSTEM LINE NUMBER IN R4 PURGE BUFFER WAIT QUEUE REQUESTS ;; LINE IS NO LONGER STARTED ;; IS THERE AN ACTIVE TRANSMIT CCB ? ;; NO POST CONTROL COMPLETE ;; SAVE THE CONTROL CCB FOR TIMEOUT ;; MAKE SURE THE TIMER IS ACTIVE ;; RETURN WITH ASYNCHRONOUS COMPLETION THE LINE AND DEVICE A N D D E V I C E ;
; \$SDSTP: 20\$: ;	' S T O MOV MOV CLR MOV BEQ CALL CLR CLR CLR CLR CLR BISB CALL BISB TST BEQ MOV MOVB ASYRET .SBTTL E N A	<pre>P ' C O N T R O D.RDBF(R5),R3 ;; #DSDTR,-(R3) ;; 4(R3) ;; D.RCCB(R5),R4 ;; 20\$;; \$RDBRT ;; D.RCCB(R5) ;; R4 ;; D.SLN(R5),R4 ;; \$RDBQP ;; #DD.STR,D.FLAG(R5) D.TCCB(R5) CTLCMP (SP)+,D.KCCB(R5) #1,(R5) \$SDENB ENABLE B L E L I N E</pre>	L FUNCTION ; RECEIVER CSR ADDR [SEL 2] TO R3 DISABLE RECEIVER, LEAVE 'DSDTR' ACTIVE DISABLE TRANSMITTER ACTIVE RECEIVE CCB TO R4 NONE THERE - SKIP IT RETURN BUFFER TO THE POOL NO RECEIVE CCB ASSIGNED CLEAR R4 FOR PARAMETER USE SET SYSTEM LINE NUMBER IN R4 PURGE BUFFER WAIT QUEUE REQUESTS ;; LINE IS NO LONGER STARTED ;; IS THERE AN ACTIVE TRANSMIT CCB ? ;; NO POST CONTROL COMPLETE ;; SAVE THE CONTROL CCB FOR TIMEOUT ;; RETURN WITH ASYNCHRONOUS COMPLETION THE LINE AND DEVICE

		<pre>#D.DCHR+2,R5 ;; POINT TO CHARACTERISTICS WORD #1 #DC.ADR,(R5)+ ;; 16-BIT STATION ADDRESS ? 20\$;; NO SHOULD BE ALL SET (R5) ;; USE THE HIGH-ORDER BYTE IN DPV-11</pre>
20\$:	BIS BIC CMPB	<pre>#^C<dpadrc>,(R5) ;;CLEAR HIGH-ORDER BYTE OF 'D.STN' WORD #INPRM,(R5) ;;SETUP INITIAL PARAMETERS #DC.ADR,-(R5) ;; ADDRESS-SIZE NO LONGER SIGNIFICANT #DC.SPS,(R5) ;; SDLC PRIMARY-STATION MODE ? 40\$;;YES - FLAGS ARE SETUP AS IS #DC.SSS,(R5) ;; SDLC SECONDARY-STATION MODE ? 60\$;; NO OPERATING MODE INVALID</dpadrc></pre>
40\$:	BICB	<pre>#DSDTR,-(R3) ;; ASSERT 'DATA TERMINAL READY' LINE #DD.ENB,D.FLAG-D.DCHR-2(R5) ;; LINE IS ENABLED CTLCMP ;; POST CONTROL FUNCTION COMPLETE</pre>
60\$:	MOV BR	#CS.ERR!CS.DEV,R3 ;; ERROR STATUS - INVALID PROTOCOL CTLERR ;; POST CONTROL COMPLETE WITH ERROR
•	.SBTTL	\$SDDIS DISABLE THE LINE
\$SDDIS:	::	
	MOV BITB BEQ	#CS.ERR!CS.ENB,R3;; ERROR CODE IF NOT STOPPED#DD.STR,D.FLAG(R5);; IS LINE STATE CORRECT ?CTLERR;; NO REJECT THE DISABLE
	CLR MOVB	D.RDBF(R5),R3 ;; ADDRESS OF RECEIVER CSR [SEL 2] -(R3) ;; DISABLE RECEIVER + TURN DTR OFF #DD.ENB!DD.STR,D.FLAG(R5) ;; LINE NO LONGER ENABLED CTLCMP ;; CLEAR CARRY AND EXIT
;		\$SDMSN SENSE MODEM STATUS ENSE MODEM STATUS
\$SDMSN:	::	
	CLR MOV	R4 ;; CLEAR R4 FOR RETURN CODES D.RDBF(R5),R3 ;; ADDRESS OF RECEIVER CSR [SEL 2]
	BIT BEQ BIS	<pre>#DSDSR,-(R3) ;; IS THE DATA-SET READY ? 20\$;; NO #MC.DSR,R4 ;; YES - SET INDICATOR IN R4</pre>
20\$:	BIT BEQ BIS	<pre>#DSRING,(R3) ;; IS THE PHONE RINGING ? 40\$;; NO #MC.RNG,R4 ;; YES - SET INDICATOR IN R4</pre>
40\$:	BIT BEQ BIS	<pre>#DSCARY,(R3) ;; IS THERE CARRIER PRESENT ? 60\$;; NO POST COMPLETE #MC.CAR,R4 ;; YES - SET INDICATOR IN R4</pre>
6Ø\$:	MOV BR	R4,(SP) ;; RETURN RESULTS IN (SAVED) R4 CTLCMP ;; POST CONTROL FUNCTION COMPLETE
	.END .TITLE .IDENT	DPV - BYTE ORIENTED DPV-11 DEVICE DRIVER MODULE /X00/
		1980 BY PMENT CORPORATION, MAYNARD, MASS.

EXAMPLE OF AN APPLICATION RSX-11M BYTE ORIENTED DPV-11 DEVICE DRIVER ; ; \$INTSX,\$INTXT, INHIB\$, ENABL\$.MCALL .MCALL CCBDF\$, TMPDF\$, \$LIBCL MCALL MDCDFS .MCALL CHADFS ; DEFINE MODEM CONTROL SYMBOLS MDCDFS ; DEFINE THE CCB OFFSETS CCBDF\$ TMPDF\$; DEFINE LINE TABLE OFFSET MACROS CHADFS ; DEFINE DEVICE CHARACTERISTICS ; ; LOCAL SYMBOL DEFINITIONS ; TRANSMITTER FLAGS ; INITIAL TRANSMIT STATUS (HALF DUPLEX) 000010 TINIT= 000020 ; TRANSMIT ENABLE TXENA= ; TRANSMIT INTERRUPT ENABLE TXINT= 000100 ; TRANSMIT ACTIVE TXACT= 000002 ; TRANSMIT START OF MESSAGE TSOM= 000400 : TRANSMIT END OF MESSAGE TEOM= 001000 ; ; RECEIVE CSR FLAGS RCVEN= ØØØØ2Ø ; RECEIVE ENABLE ; RECEIVE INTERRUPT ENABLE RXINT= ØØØ1ØØ ; RECEIVE CRC CHECK 3*400 CRC =; STRIP SYNC SSYN= 020000 PROSEL= Ø40000 ; PROTOCOL SELECTION (BYTE) ; INITIAL RECEIVE STATUS RINIT= RXINT!RCVEN!DTR INPRM= SSYN!PROSEL!CRC ; INITIALIZATION FLAGS ; ; MODEM STATUS FLAGS ; REQUEST TO SEND LEAD RTS= 000004 ; CLEAR TO SEND CTS= 020000 ; DATA TERMINAL READY 000002 DTR =DSR= 001000 ; DATA SET READY ; RING INDICATOR RING= 040000 : ; DPV11 DEVICE DRIVER DISPATCH TABLE ; TRANSMIT ENABLE \$DPVTB::,WORD DPASX ; RECEIVE ENABLE (ASSIGN BUFFER) .WORD DPASR .WORD DPKIL ; KILL I/O ; CONTROL INITIATION .WORD DPCTL DPTIM ; TIME OUT .WORD ;+ ; **-\$DPVRI-DPV11 RECEIVE INTERRUPT SERVICE ROUTINE THE DEVICE INTERRUPT IS VECTORED TO THE DEVICE LINE TABLE ; BY THE HARDWARE AND THIS ROUTINE IS ENTERED BY A ; 'JSR R5, \$DPVRI' INSTRUCTION AT THE BEGINNING OF THE LINE ; TABLE. ; INPUTS: ; ; R5 = ADDRESS OF DEVICE LINE TABLE + 4 ; STACK: $\emptyset(SP) = SAVED R5$; 2(SP) = INTERRUPTED BIAS 4(SP) = INTERRUPTED PC ; 6(SP) = INTERRUPTED PS;

OUTPUTS:

D-12

; ; ETC.

;

; -

\$DPVRI:: MOV R4, -(SP);;; SAVE R4 (R5) + , R4MOV ;;; GET ADDRESS OF RECEIVER DATA BUFFER ;;; GET CHARACTER AND FLAGS MOV (R4),R4 BMI DPRHO ;;; ANY ERROR IS RECEIVER OVERRUN .IF DF M\$\$MGE ;;; SAVE CURRENT MAP MOV KISAR6,-(SP) ;;; MAP TO DATA BUFFER MOV (R5) + KISAR6.IFTF MOVB R4.0(R5) +;;; STORE CHARACTER IN RECEIVE BUFFER .IFT MOV (SP)+,KISAR6 ;;; RESTORE PREVIOUS MAPPING .ENDC DEC (R5) ;;; DECREMENT REMAINING BYTE COUNT BEQ DPRCP ;;; IF EQ RECEIVE COMPLETE INC -(R5) ;;; ADVANCE BUFFER ADDRESS MOV (SP) + , R4;;; RESTORE REGISTERS \$INTXT ;;; EXIT THE INTERRUPT ; EXCEPTIONAL RECEIVE SERVICE ROUTINES HARDWARE OVERRUN ; .ENABL LSB DPRHO: ADD #<RCNT-RDBF-2>,R5 ;;; POINT TO COUNT CELL MOV #100001, RFLAG-RCNT(R5) ;;; SET FLAGS TO COMPLETE REQUEST AND ;;; CLEAR RECEIVE ACTIVE ON EXIT MOV #CS.ERR+CS.ROV,RSTAT-RCNT(R5) ;;; SET OVERRUN STATUS ; RECEIVE BYTE COUNT RUNOUT ; ; DPRCP: MOV R4, (R5) +;;; SAVE CRC FLAG AND POINT TO PRIORITY MOV RDBF-RPRI(R5), R4 ;;; GET RECEIVE DATA BUFFER ADDRESS BIC #RXINT, -(R4);;; CLEAR RECEIVER INTERRUPT ENABLE ;;; RESTORE R4 SO '\$INTSV' IS HAPPY MOV (SP) +, R4\$INTSX ;;; DO A TRICKY \$INTSV (R5 PRESAVED BUT NOT R4) MOV R3,-(SP) SAVE AN ADDITIONAL REGISTER ;; TST (R5) +POINT TO FLAGS WORD ;; ASR (R5) +LOAD C-BIT FROM FLAGS (BIT Ø) ;; BCS 20\$ IF CS DATA, POST COMPLETION ;; MOV (R5),R4 GET PRIMARY CCB ADDRESS ;; .LIST MEB \$LIBCL HDRA-RPRIM, R5, \$DDHAR, SAV ;; CALL DDHAR THROUGH LINE TABLE .NLIST MEB ROR -2(R5)SAVE 'FINAL SEEN' IN FLAGS (BIT 15 SET) ;; TST R3 EXAMINE BYTE COUNT FOR THIS MESSAGE ;; BMI 10\$ IF MI AN INVALID HEADER RECEIVED ;; IF EQ SET TO RECEIVE REST OF HEADER BEQ 7\$;; ADD #2,R3 ACCOUNT FOR BCC IN CURRENT COUNT ;; MOV R3, RPCNT-RPRIM(R5) ;; SAVE DATA COUNT UNTIL HEADER CRC

IS CHECKED ;; ;; GET REMAINING HEADER 7\$: MOV #5,R3 MARK DATA IN PROGRESS IN FLAGS (BIT Ø SET) INC -(R5) ;; INCLUDE CURRENT COUNT IN TOTAL COUNT ADD R3, e - (R5);; ADD #RCNT-RTHRD, R5 POINT TO CURRENT COUNT ;; MOV SET UP CURRENT BYTE COUNT R3,(R5) ;; MOVE BUFFER ADDRESS PAST BCC INC -(R5);; .IF DF M\$\$MGE MOV -4(R5), R3GET ADDRESS OF RECEIVE DATA BUFFER :: .IFF MOV -(R5), R3GET ADDRESS OF RECEIVE DATA BUFFER ;; .ENDC BR REXTØ FINISH IN COMMON CODE :: ; INVALID HEADER RECEIVED ; ; MESSAGE TOO LONG ? 10\$: #CS.MTL,R3 BIT ;; BNE 31\$ IF NE YES, POST COMPLETION ;; (R5) + , R4RECOVER PRIMARY CCB ADDRESS MOV :: SET UP THIS CCB AGAIN (CLEARS 'RSTAT') CALL BUFUSE ;; RDBF-RPRIM(R5),R3 ;; SET POINTER TO REC. DAT. BUFF. MOV ;; CLEAR RECEIVE ACTIVE TO FORCE RESYNC BR 40\$ POST COMPLETION ON RECEIVE COMPLETE ï R5 = POINTS TO PRIMARY CCB ADDRESS ; ; 20\$: RCNT-RPRIM(R5) ;; IS CRC ERROR FLAG SET ? TST ;; IF MI, YES - CRC IS VALID BMI 25\$ ELSE SET CRC ERROR STATUS FOR DLC MOV #CS.ERR+CS.DCR,R3 ;; BR 31\$;; GO RETURN BUFFER 25\$: MOV RPCNT-RPRIM(R5), RCNT-RPRIM(R5) ;; SET REMAINING COUNT BEO ;; NONE SO END OF MESSAGE 305 RPCNT-RPRIM(R5),@RTHRD-RPRIM(R5) ;; SET TOTAL COUNT IN CCB ADD ;; FORCE C BIT SEC ROL RFLAG-RPRIM(R5) ;; PUT Q SYNC BACK & MARK NON HEADER ;; INCLUDE LAST CHAR IN BUFFER INC RADD-RPRIM(R5) MOV RDBF-RPRIM(R5),R3 ;; GET CSR FOR EXIT ;; TAKE COMMON EXIT BR REXT 30\$: CLR R3 ;; GET GOOD STATUS GET PRIMARY CCB ADDRESS 31\$: MOV (R5) + , R4;; (R5),R3 PICK UP ADDITIONAL STATUS BIS ;; POST RECEIVE COMPLETION CALL \$DDRCP ;; MOV RDBF-RSTAT(R5),R3 ;; GET ADDRESS OF RECEIVE DATA BUFFER SET UP NEXT RECEIVE BUFFER CALL BUFSET ;; IF CS NO BUFFER AVAILABLE TURN OFF RECEIVER BCS REXT1 ;; BNE 40\$ IF NE CLEAR RECEIVE ACTIVE TO RESYNC ;; RESET PARTIAL COUNT REXT: CLR RPCNT-RPRIM(R5) ;; ENABLE RECEIVER INTERRUPTS #RXINT, -(R3)**REXTØ:** BIS ;; **RESTORE R3** REXT1: MOV (SP)+,R3;; RETURN TO SYSTEM RETURN ;; 40\$: REF LABEL ;; CLEAR RECEIVE ACTIVE TO FORCE RESYNC ; ; R3 = ADDRESS OF RECEIVE DAT BUFFER ;

D-14

```
R5 = ADDRESS OF 'RPRIM'
;
;
DPCRA:
         CLR
                  -(R5)
                                  ;; CLEAR FLAGS WORD
         BIC
                 #RCVEN,-(R3) ;; CLEAR RECEIVE ACTIVE FOR RESYNC
RPCNT-RFLAG(R5) ;; RESET PARTIAL COUNT
                  \#RCVEN, -(R3)
         CLR
         BIS
                  #CS.RSN,RSTAT-RFLAG(R5) ;; INDICATE A RESYNC
         BIS
                  #RINIT,(R3)
                                 ;; ENABLE RECEIVER
         BR
                 REXT1
                                   ;; FINISH IN COMMON CODE
         .DSABL LSB
;+
  **-$DPVTI-DPV11 TRANSMIT INTERRUPT SERVICE
 ;
;
;
  THIS ROUTINE IS ENTERED ON A TRANSMITTER INTERRRUPT VIA
 ;
; A 'JSR R5, DPVTI' WITH R5 CONTAINING THE ADDRESS OF THE
  DEVICE LINE TABLE OFFSET BY 'TCSR'.
;
  INPUTS:
;
;
         R5 = ADDRESS OF DEVICE LINE TABLE + 'TCSR'
;
         STACK CONTAINS:
;
         \emptyset(SP) = INTERRUPTED R5
;
         2(SP) = INTERRUPTED BIAS
         4(SP) = INTERRUPTED PC
         6(SP) = INTERRUPTED PS
;
  OUTPUTS:
;
;
; ETC.
;
         .ENABL LSB
$DPVTI::
         MOV
                  R4 - (SP)
                                   ;;; SAVE R4
         MOV
                  (R5) + , R4
                                   ;;; GET TRANSMITTER CSR ADDRESS
         TST
                  (R4) +
                                   ;;; TEST FOR UNDERRUN
         BMI
                  10$
                                   ;;; IF MI, UNDERRUN - WAIT FOR TIMEOUT
         DEC
                  TCNT-TCSR-2(R5) ;;; DECREMENT COUNT
         BEQ
                 2Ø$
                                   ;;; IF EQ, BYTE COUNT RUNOUT
         .IF DF M$$MGE
        MOV
                 KISAR6,-(SP)
                                  ;;; SAVE CURRENT MAPPING
        MOV
                  (R5) + , KISAR6
                                   ;;; MAP TO DATA BUFFER
         . IFTF
        MOVB
                 (R5) + (R4)
                                   ;;; OUTPUT A CHARACTER
         .IFT
        MOV
                  (SP) + KISAR6
                                   ;;; RESTORE PREVIOUS MAPPING
         .IFTF
        INC
                 -(R5)
                                   ;;; UPDATE BUFFER ADDRESS
        MOV
                 (SP) + R4
                                   ;;; RESTORE R4
        $INTXT
;
; TRANSMITTER UNDERRUN
;
; DISABLE TRANSMITTER INTERRUPTS AND WAIT FOR A TIMEOUT
```

```
#TSOM/400,1(R4) ;;; CLEAR UNDERRUN BIT
10$:
        BISB
                 #TUNST,TSTAT-TCSR-2(R5) ;;; SET STATE TO DISABLE TRANSMITTER
        MOV
;
 TRANSMIT BYTE COUNT RUNOUT
;
;
 OUTPUT TO STATE PROCESSING ROUTINES:
;
;
        R3 = ADDRESS OF TRANSMITTER CSR
;
        R5 = ADDRESS OF THREAD WORD CELL
ï
;
                 #TPRI-TCSR-2,R5 ;;; POINT TO PRIORITY DATA
20$:
        ADD
                                 ;;; CLEAR INTERRUPT ENABLE
        BIC
                 \#TXINT, -(R4)
                                  ;;; RESTORE R4 SO '$INTSV' IS HAPPY
        MOV
                 (SP) + , R4
                                  ;SAVE WITH R5 ON STACK BUT NOT R4
        $INTSX
        .IFT
                                  ;; SAVE CURRENT MAPPING
                 KISAR6,-(SP)
        MOV
        .IFTF
                                  ;; SAVE AN ADDITIONAL REGISTER
        MOV
                 R3, -(SP)
                 TCSR-TSTAT(R5),R3 ;; GET TRANSMITTER CSR ADDRESS
        MOV
                                 ;; DISPATCH TO PROCESSING ROUTINE
                 @(R5)+
        CALLR
        .DSABL
                LSB
;+
 **-DPASX-ASSIGN A TRANSMIT BUFFER
;
;
;
 THIS ROUTINE IS ENTERED VIA THE MATRIX SWITCH TO
;
 QUEUE A CCB FOR TRANSMISSION.
;
;
;
  INPUTS:
        R4 = ADDRESS OF CCB TO TRANSMIT
;
        R5 = ADDRESS OF DEVICE LINE TABLE
;
 OUTPUTS:
;
;
        IF THE TRANSMITTER IS IDLE, TRANSMISSION IS
;
        INITIATED; OTHERWISE, THE CCB (OR CHAIN) IS QUEUED TO
;
        THE END OF THE SECONDARY CHAIN.
;
 REGISTERS MODIFIED:
;
;
        R3, R4, AND R5
;
;-
DPASX:
                                  ; GET TRANSMITTER CSR ADDRESS
                 TCSR(R5),R3
        MOV
                                  ; DISABLE TRANSMITTER INTERRUPTS
        BIC
                 #TXINT,(R3)
                                  ; POINT TO PRIMARY CELL
         ADD
                 #TPRIM,R5
         .IFT
                                  ; SAVE CURRENT MAPPING
         MOV
                 KISAR6, -(SP)
         .IFTF
                                  ; SAVE R3
                 R3, -(SP)
        MOV
                                  ; PRIMARY ASSIGNED ?
         TST
                 (R5)+
```

;

```
D-16
```

BNE 10\$; IF NE, YES - QUEUE TO SECONDARY CHAIN ; SET UP PRIMARY CALL TBSET ; TRANSMITTER ACTIVE ? BIT #TXACT, (R3) ; IF EQ, NO - START IMMEDIATELY ; SET STATE FOR STARTUP BEO STSTR MOV #STSTR, -(R5)BR ; WAIT FOR INTERRUPT WAITI R4, -(SP); SAVE POINTER TO FIRST CCB 10\$: MOV ; COPY POINTER TO CCB 20\$: MOV R5, R4 MOV (R4),R5 ; GET NEXT CCB BNE ; IF NE, KEEP GOING 205 MOV ; LINK NEW CCB CHAIN TO LAST CCB (SP) +, (R4)BR TEXT2 ; FINISH IN COMMON CODE ;+ **-STSTR-STARTUP STATE PROCESSING ; ; ;-STSTR: BIS #RTS, -4(R3); ASSERT REQUEST TO SEND BIS #TXENA,(R3) ; ENABLE TRANSMITTER TIMS-TTHRD(R5), TIME-TTHRD(R5) ; START TIMER MOVB ;+ **-STCTS-WAIT FOR CLEAR TO SEND STATE PROCESSING ; ; ;-STCTS: BIT #CTS, -4(R3); IS CLEAR TO SEND UP ? BNE STSYN ; IF NE, YES - START SYNC TRAIN MOV #STCTS, -(R5); SET STATE FOR CTS ; SET ADDRESS OF PAD BUFFER MOV #\$PADB,R4 ; SET TSOM, CLEAR TEOM MOV #TSOM, -(SP); FINISH IN COMMON CODE BR TEXT1 ; 1 ; **-STSYN-SYNC TRAIN REQUIRED STATE PROCESSING ; ;-; SET STATE FOR DATA STSYN: MOV #STDAT, -(R5) MOV #\$SYNB,R4 ; SET ADDRESS OF SYNC BUFFER MOV ; SET TSOM, CLEAR TEOM #TSOM,-(SP) BR TEXTØ ; FINISH IN COMMON CODE ;+ **-STCRC-SEND CRC STATE PROCESSING ; ; ; -.ENABL LSB STCRC: BIS #TEOM, 2(R3) ; SEND CRC CALL TPOST ; POST COMPLETION AND SET UP NEXT CCB ; IF NE, NOTHING MORE TO SEND BNE 10\$ MOV #STDAT, -(R5) ; ASSUME NEXT STATE IS SEND SYNC'S #CF.SYN,C.FLG-C.BUF(R4) ; ARE SYNC'S REQUIRED ? BIT BEQ 20\$; IF EQ, NO - LEAVE ASSUMED STATE MOV #STSYN, (R5) ; ELSE CHANGE STATE TO SEND SYNC'S ; WAIT FOR CRC TO BE SENT ΒR 20\$ #STIDL,-(R5) ; SET STATE TO IDLE 105: MOV ; SHUT DOWN TRANSMITTER BIC #TXENA,(R3) 20\$: ; ;+

D-17

```
; **-WAITI-WAIT FOR INTERRUPT
;
;-
WAITI:
        MOV
                 #1,TCNT-TSTAT(R5) ; WAIT FOR ONE INTERRUPT
                TIMS-TSTAT(R5), TIME-TSTAT(R5) ; START TIMER
        MOVB
        BR
                 TEXT2
                                 ; FINISH IN COMMON CODE
;+
  **-STIDL-IDLE STATE PROCESSING
;
;
;-
                                  ; DROP REQUEST TO SEND
STIDL:
        BIC
                 \#RTS, -4(R3)
        TST
                 -(R5)
                                  ;
305:
                 TIME-TSTAT(R5)
                                  ; CLEAR TIMER
        CLRB
        BR
                 TEXT3
                                  ; FINISH IN COMMON CODE
        .DSABL
                LSB
;+
  **-TUNST-TRANSMIT DATA UNDER RUN STATE
;
;
        RETURN ALL TRANSMIT BUFFERS TO HIGHER LEVEL
;
;-
                 #-TTHRD,R5
TUNST:
        ADD
                                  ;;TIMEOUT EXPECTS DDM LINE TABLE POINTER
                                          ;;RESET TIMER
        CLRB
                 (R5)
                DPTIM
                                          ;;FAKE A TIMEOUT TO RETURN BUFFERS
        CALL
        MOV
                 #STIDL,TSEC-TSTAT(R5)
                                          ;;SET STATE TO IDLE
        ΒR
                 TEXT3
                                          ;;TAKE COMMON EXIT
 **-STDAT-DATA STATE PROCESSING
;
;
;-
                                 ; GET ADDRESS OF FLAGS WORD FROM THREAD
STDAT:
        MOV
                 (R5),R4
        ADD
                #C.FLG-C.STS,(R5) ; UPDATE THREAD POINTER
                                 ; LAST BUFFER THIS CCB ? (BIT 15 SET)
        TST
                (R4) +
        BPL
                10$
                                 ; IF PL, NO
                                 ; POST COMPLETION AND SET UP NEXT CCB
        CALL
                TPOST
                                ; ASSUME DATA CONTINUES
10$:
        MOV
                \#STDAT, -(R5)
        BIT
                #CF.EOM,C.FLG-C.BUF(R4) ; SEND CRC FOLLOWING THIS BUFFER ?
                                 ; IF EQ, NO - LEAVE ASSUMED STATE
        BEQ
                2Ø$
                                 ; ELSE CHANGE STATE FOR CRC TO BE SENT
                #STCRC, (R5)
        MOV
205:
                                 ; CLEAR TSOM, CLEAR TEOM
        CLR
                -(SP)
;+
; **-TEXTØ-COMMON EXIT ROUTINES
; **-TEXT1-
 **-TEXT2-
;
; **-TEXT3-
;
;-
TEXTØ:
        MOVB
                TIMS-TSTAT(R5), TIME-TSTAT(R5) ; START TIMER
                #TCSR-TSTAT+2,R5 ; POINT TO CURRENT BUFFER CELL
TEXT1:
        ADD
        .IFT
                                 ; COPY RELOCATION BIAS
        MOV
                 (R4) +, (R5) +
        .IFF
        TST
                (R4) +
                                 ; SKIP OVER RELOCATION BIAS IN CCB
```

```
D-18
```

	.IFTF		
	MOV MOV	(R4)+,(R5)+ (R4),(R5)	; COPY VIRTUAL ADDRESS ; AND THE BYTE COUNT
	.IFT		
	MOV	-4(R5),KISAR6	; MAP TO DATA BUFFER
	.IFTF		
TEXT2: TEXT3:	BISB INC MOV BIS MOV .IFT	<pre>@-2(R5),(SP) -2(R5) (SP)+,2(R3) #TXINT,(R3) (SP)+,R3</pre>	; BUILD CHARACTER TO OUTPUT ; UPDATE VIRTUAL ADDRESS ; OUTPUT CHARACTER AND FLAGS ; ENABLE TRANSMITTER INTERRUPTS ; RESTORE R3

D-19

第五章人 ・ 1911 - 1984	
· 2016년 1월 17일 - 19일 전 19일 전 · 전립는 전철 전 19일 전 19일 전 19일 전 · 전체는 글 · 2017년 - 10일 전 19일 전 19일 전	

GLOSSARY

Asynchronous Transmission

Transmission in which time intervals between transmitted characters may be of unequal length. Transmission is controlled by start and stop elements at the beginning and end of each character. Also called start-stop transmission.

BDIN

Data Input on the LSI-II bus.

BDOUT

Data Output on the LSI-II bus.

BIAKI

Interrupt Acknowledge.

Bit-Stuff Protocol

Zero insertion by the transmitter after any succession of five continuous ones designed for bitoriented protocols such as IBM's Synchronous Data Link Control (SDLC).

Bits per Second (b/s)

Bit transfer rate per unit of time.

BIRQ

Interrupt Request priority level for LSI-11 bus.

BRPLY

LSI-11 Bus Reply. BRPLY is asserted in response to BDIN or BDOUT.

BSYNC

Synchronize – asserted by the bus master device to indicate that it has placed an address on the bus.

Buffer

Storage device used to compensate for a difference in the rate of data flow when transmitting data from one device to another.

BWTBT

Write Byte.

CCITT

Comite Consultatif Internationale de Telegraphie et Telephonie – An international consultative committee that sets international communications usage standards.

Control and Status Registers (CSRs)

Communication of control and status information is accomplished through these registers.

Cyclic Redundancy Check (CRC)

An error detection scheme in which the check character is generated by taking the remainder after dividing all the serialized bits in a block of data by a predetermined binary number.

Data Link Escape (DLE)

A control character used exclusively to provide supplementary line control signals (control character sequences or DLE sequences). These are 2-character sequences where the first character is DLE. The second character varies according to the function desired and the code used.

Data-Phone DIGITAL Service (DDS)

A communications service of the Bell System in which data is transmitted in digital rather than analog form, thus eliminating the need for modems.

DIGITAL Data Communications Protocol (DDCMP)

DIGITAL's standard communications protocol for character-oriented protocol.

Direct Memory Access (DMA)

Permits I/O transfer directly into or out of memory without passing through the processor's general registers.

Electronic Industries Association (EIA)

A standards organization specializing in the electrical and functional characteristics of interface equipment.

Full-Duplex (FDX)

Simultaneous 2-way independent transmission in both directions.

Field-Replaceable Unit (FRU)

Refers to a faulty unit not to be repaired in the field. Unit is replaced with a good unit and faulty unit is returned to predetermined location for repair.

Half-Duplex (HDX)

An alternate, one-way-at-a-time independent transmission.

LARS

Field Service Labor Activity Reporting System.

Non-Processor Request (NPR)

Direct memory access-type transfers, (see DMA).

Protocol

A formal set of conventions governing the format and relative timing of message exchange between two communicating processes.

RS-232-C

EIA standard single-ended interface levels to modem.

RS-422-A

EIA standard differential interface levels to modem.

RS-423-A

EIA standard single-ended interface levels to modem.

RS-449

EIA standard connections for RS-422-A and RS-423-A to modem interface.

Synchronous Transmission

Transmission in which the data characters and bits are transmitted at a fixed rate with the transmitter and receiver synchronized.

V.35

(CCITT Standard) - Differential current mode-type signal interface for high-speed modems.

- 经复合工作资料

出现的地址 机械加强 化苯基氯化乙基 机输送器 经资产的 化无效加加分子 法非现代的 车门

/

化甘酮胆酸盐 建氯化合物 的复数

. Even supervises and all the apple and the could be considered or a fixed rate with the rears. I success to our success of conditionates?

20 A.

of CDDD stands on a difference of an antiony and deach metalized for high-speed means of

Reader's Comments

DPV11 SERIAL SYNCHRONOUS INTERFACE TECHNICAL MANUAL EK-DPV11-TM-002

Your comments and suggestions will help us in our continuous effort to improve the quality and usefulness of our publications.

What is your general reaction to this manual? In your judgement is it complete, accurate, well organized, well written, etc? Is it easy to use? ____

What features are most useful?.....

What faults or errors have you found in the manual?_____

Does this manual satisfy the need you think it was intended to satisfy?_____

Does it satisfy your needs? ______ Why? _____

Please send me the current copy of the Technical Documentation Catalog, which contains information on the remainder of DIGITAL's technical documentation.

Title City Company State/Country Department Zip Additional copies of this document are available from: Digital Equipment Corporation 444 Whitney Street Northboro, MA 01532 Attention: Printing and Circulation Services (NR2/M15) Customer Services Section	Name	Street
Company	Title	City
Additional copies of this document are available from: Digital Equipment Corporation 444 Whitney Street Northboro, MA 01532 Attention: Printing and Circulation Services (NR2/M15) Customer Services Section		State/Country
Digital Equipment Corporation 444 Whitney Street Northboro, MA 01532 Attention: Printing and Circulation Services (NR2/M15) Customer Services Section	Department	stand stand - Zip
Digital Equipment Corporation 444 Whitney Street Northboro, MA 01532 Attention: Printing and Circulation Services (NR2/M15) Customer Services Section		
Digital Equipment Corporation 444 Whitney Street Northboro, MA 01532 Attention: Printing and Circulation Services (NR2/M15) Customer Services Section	Additional copies of this document are available	ilable from:
Digital Equipment Corporation 444 Whitney Street Northboro, MA 01532 Attention: Printing and Circulation Services (NR2/M15) Customer Services Section		
444 Whitney Street Northboro, MA 01532 Attention: Printing and Circulation Services (NR2/M15) Customer Services Section		
Northboro, MA 01532 Attention: Printing and Circulation Services (NR2/M15) Customer Services Section Order No. EK-DPV11-TM-002	•	
Attention: Printing and Circulation Services (NR2/M15) Customer Services Section Order No. EK-DPV11-TM-002	Northboro, MA 01532	
Order No EK-DPV11-TM-002	Attention: Printing and Circulation Serv	vices (NR2/M15)
Order No EK-DPV11-TM-002		
Order No. EK-DPV11-IM-002		e e pella 23 a da entre en la contra da esta en
	Order No. EK-DPV11-TM-002	
	1983年1989年19月1日,中国大学校的1989年19月1日 1997年1月1日(1997年1月)	

第5号を決定したが、日本のを行うました。 第5号の「あた」に対した。 「おうない」に対したが、「あっ」を含めた。 でのはない。

化化化学 医小疗法综合征检查 机铸造 计结构化计算机 化热力

est de agripe a partiere. La composition de la composition de la composition de la composition state tours anti-

____ Do Not Tear - Fold Here and Staple - ___



No Postage Necessary if Mailed in the United States

BUSINESS REPLY MAIL

Apples, where you are not starting to a second second

one and the second second second

FIRST CLASS PERMIT NO. 33 MERRIMACK, NH

POSTAGE WILL BE PAID BY ADDRESSEE

Digital Equipment Corporation Educational Services Development & Publishing Continental Blvd. (MK1/2M26) Merrimack, N.H. 03054





1

1

digital equipment corporation