


THIS SCHEMATIC IS FURNISHED ONLY FOR TEST AND MAINTENANCE PURPOSES. THE CIRCUITS ARE PROPRIETARY IN NATURE AND SHOULD BE TREATED ACCORDINGLY. COPYRIGHT 1969 BY DIGITAL EQUIPMENT CORPORATION

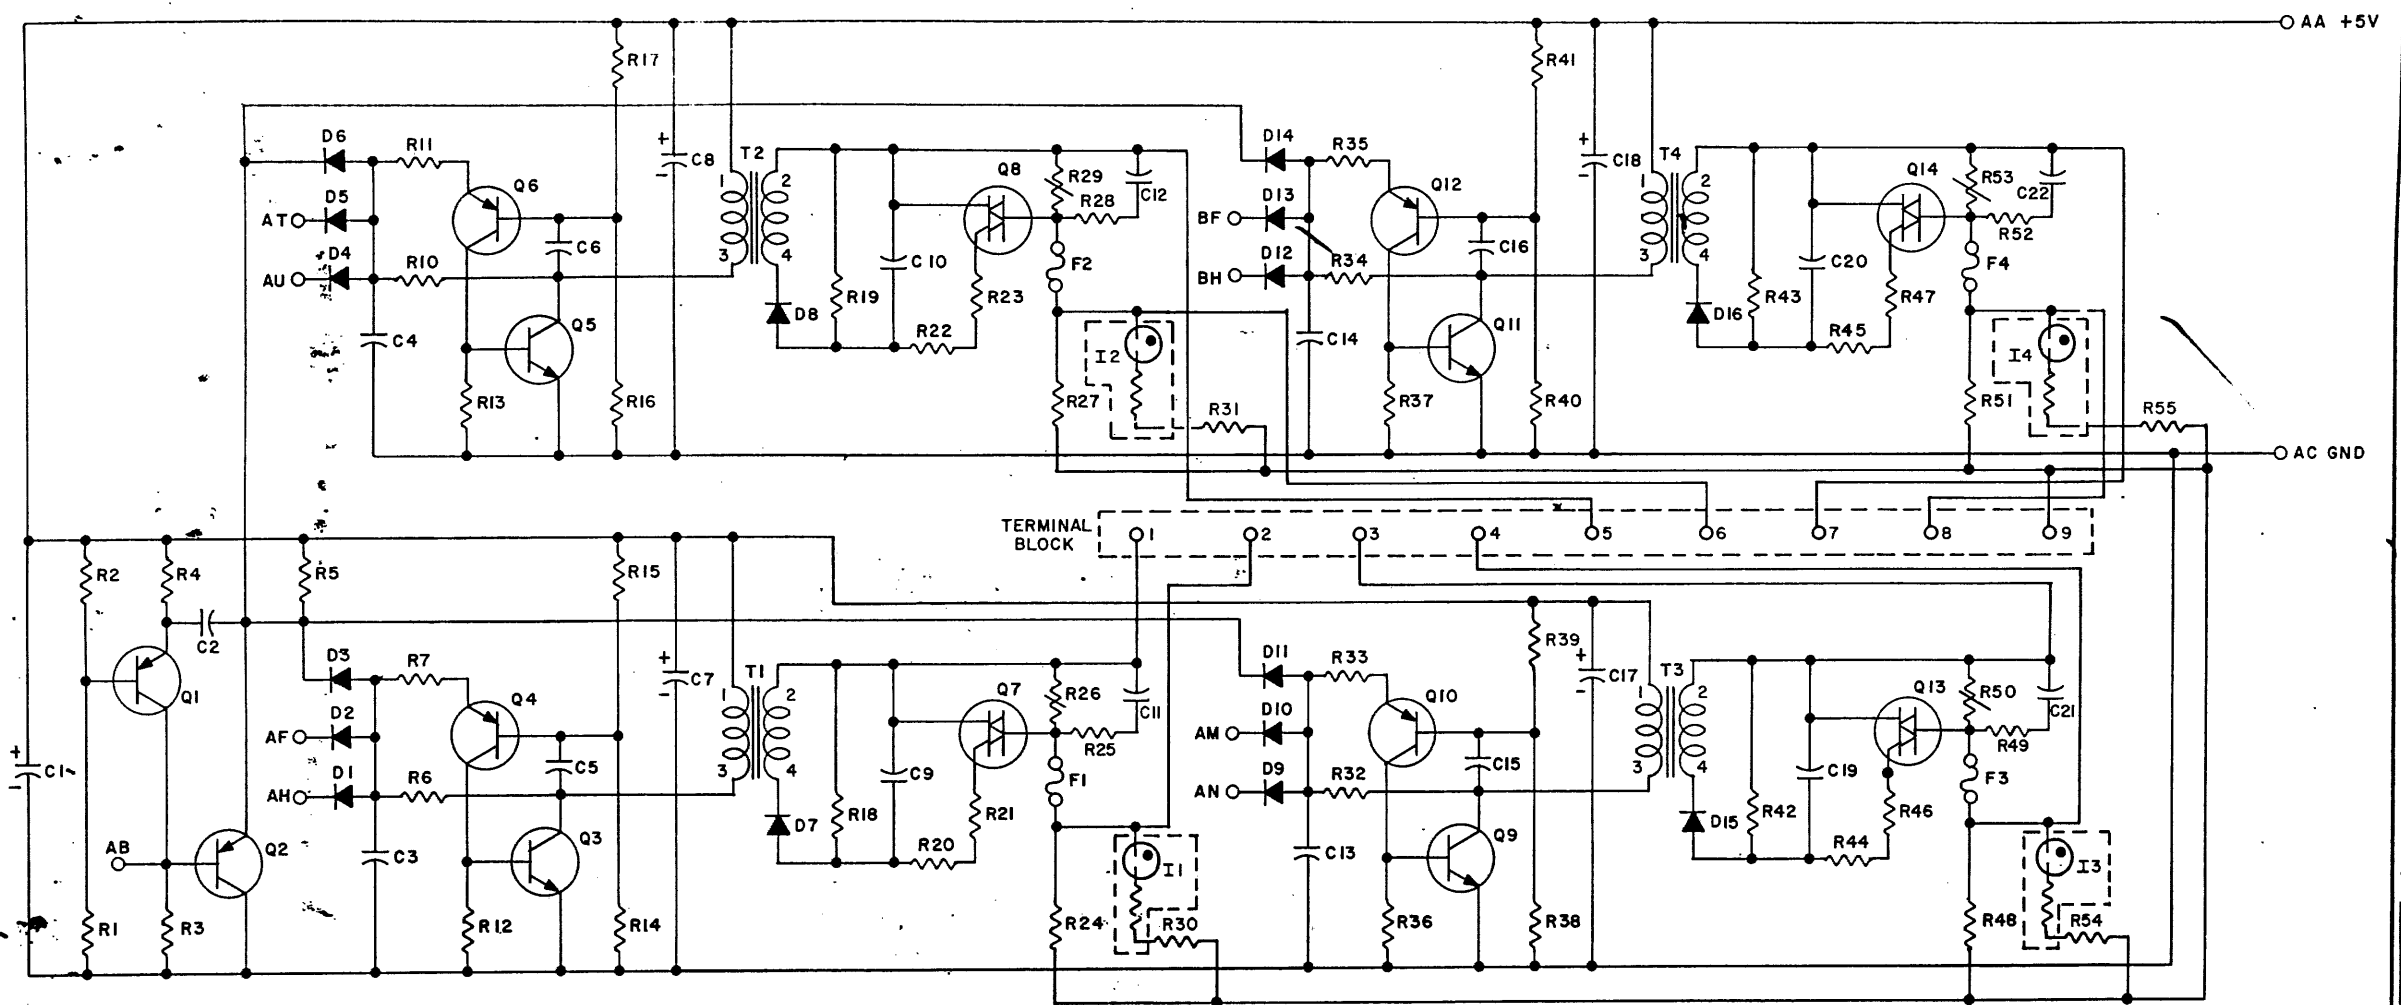

R3	RES 560 Ω 1/4W 5%	1301890
R5	RES 220 Ω 1/4W 5%	1300271
C2	.022 MFD 100V 10%	1010780
T1-T4	TRANSFORMER	1609751
TERMINAL BLOCK	BLOCK, 9 TERMINAL 699-Z-3701-9	1209083
F1-F4	FUSE, PICO 5A #276005	1209070
Q7, Q8, Q13, Q14	TRIAC RCA 40430	1505564
Q3, Q5, Q9, Q11	TRANSISTOR DEC1008-S	1502155
Q1, Q2, Q4, Q6, Q10, Q12	TRANSISTOR DEC6534D	1503409
R30, R31, R54, R55	RES. 15K 1/4W 10% CC	1300494
R26, R29, R50, R53	VARIATOR 333 BNR-7	1305571
R24, R27, R48, R51	RES. 10K 2W 10% CC	1300482
R44-R47, R49, R52	RES. 10 1/4W 10% CC	1300170
R7, R11, R20-R23, R25, R28, R33, R35, R37, R41, R14-R17, R38-R41	RES. 4.7K 1/4W 10% CC	1300448
R19, R32, R34, R36, R37, R42, R43, R4	RES. 1.2K 1/4W 10% CC	1300386
R1, R2, R3, R6, R8, R9, R10, R12, R13, R18	RES. 1.2K 1/4W 10% CC	1300386
D7, D8, D15, D16	DIODE D672	1105275
D1 - D6, D9 - D14	DIODE D600	1105366
C11, C12, C21, C22	CAP. .047MFD 400V 20%	1009656
C7, C8, C17, C18	CAP. 2.2MFD 20V 10%	1002627
C5, C6, C15, C16	CAP. 100MMF 100V 5% DM	1000016
C3, C4, C13, C14	CAP. 680MMF 500V 10% CER.	1005726
C2, C9, C10, C19, C20	CAP. .047MFD 250V 20%	1003053
C1	CAP. 22MFD 6V 10% TANT	1005636
	PARTS LIST	A-PL-K614-0-0
REFERENCE DESIGNATION	DESCRIPTION	PART NO.

REVISIONS	CHK	CHK NO.	REV.
		00001	A
		00003	B
		00004	C
		00006	E
		00007	F
		00008	H

DRN.	M. Nelson	DATE	1-21-69
CHK'D		DATE	3/12/67
ENG.		DATE	2/1/69
PROD.		DATE	

TRANSISTOR & DIODE CONVERSION CHART	
DEC	EIA
D600	IN4009
D672	IN3653
DEC6534D	MPS6534
DEC1008	MM1008

digital EQUIPMENT CORPORATION
MAYNARD, MASSACHUSETTS

TITLE: ISOLATED AC SWITCH K614

SIZE: C CODE: CS NUMBER: K614-0-1

PRINTED CIRCUIT REV. D