



For the desktop model (TK50-D), remove the rear bezel (three screws) and slide the basic chassis out from the rear of the unit. Use the tab at upper middle of rear panel to pull unit out (Figure 6-2).

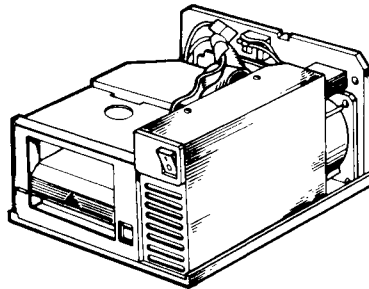

A. TK50 RACK MOUNT MODEL

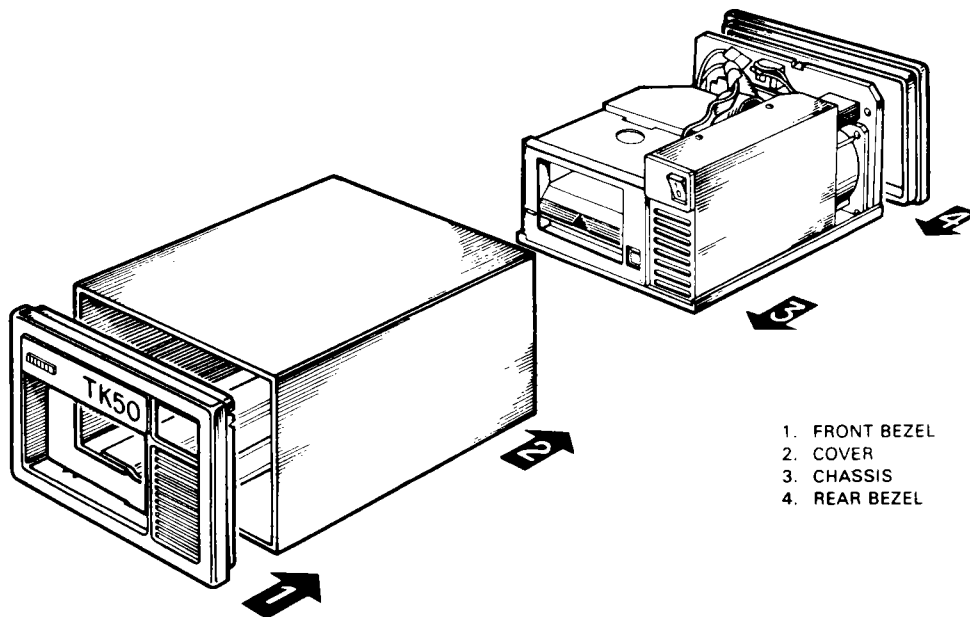

B. TK50 DESKTOP MODEL

1. FRONT BEZEL
2. COVER
3. CHASSIS
4. REAR BEZEL

MR-15360
SHR-0411-85

Figure 6-2 Removal from Desktop Housing