





## RZ26L™ Disk Drive Data Sheet

EK-RZ26L-IS. A01

February, 1994

To install the RZ26L disk drive, refer to any section in your system documentation that explains how to install an RZ™-series hard disk drive. The installation procedure is the same for all RZ-series hard disk drives.

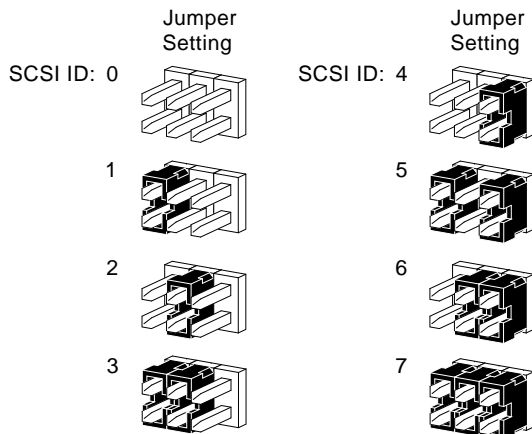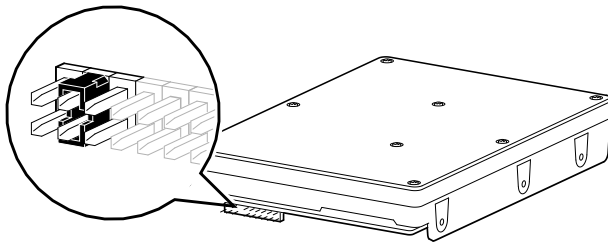

MLO-012101

**Table 1 RZ26L Disk Drive Specifications**

<b>Weight</b>	<b>Height</b>	<b>Width</b>	<b>Depth</b>
0.49 kg (1.08 lb)	2.54 cm (1.00 in)	10.2 cm (4.00 in)	14.6 cm (5.75 in)
<b>Drive Formatted Storage Capacity</b>			
Bytes per drive	1.05 GB (formatted)		
Bytes per surface	75 MB		
Bytes per track	29,640		
Buffer size	512 KB		
<b>Drive Performance</b>			
Data transfer rate to/from media	2.7-5.5 MB/sec		
Seek time track to track	1 msec		
Seek time average	9.5 msec		
Seek time maximum (full stroke)	≤ 20 msec		
Average latency	5.6 msec		
Rotational speed	5400 rpm		
Interleave ratio	1:1		
<b>Drive Operating Conditions</b>			
Ambient temperature	5°C to 55°C (41°F to 131°F)		
Relative humidity	10%–90% non-condensing		
Maximum wet bulb	32°C (90°F)		
Temperature gradient	20°C (36°F) per hour		
<b>Drive Nonoperating Conditions</b>			
Ambient temperature	–40°C to 66°C (–40°F to 151°F)		
Relative humidity	8%–95% (noncondensing)		
Maximum wet bulb	46°C (115°F)		
Temperature gradient	30°C (55°F) per hour		

© Digital Equipment Corporation 1994. All rights reserved.

S2461