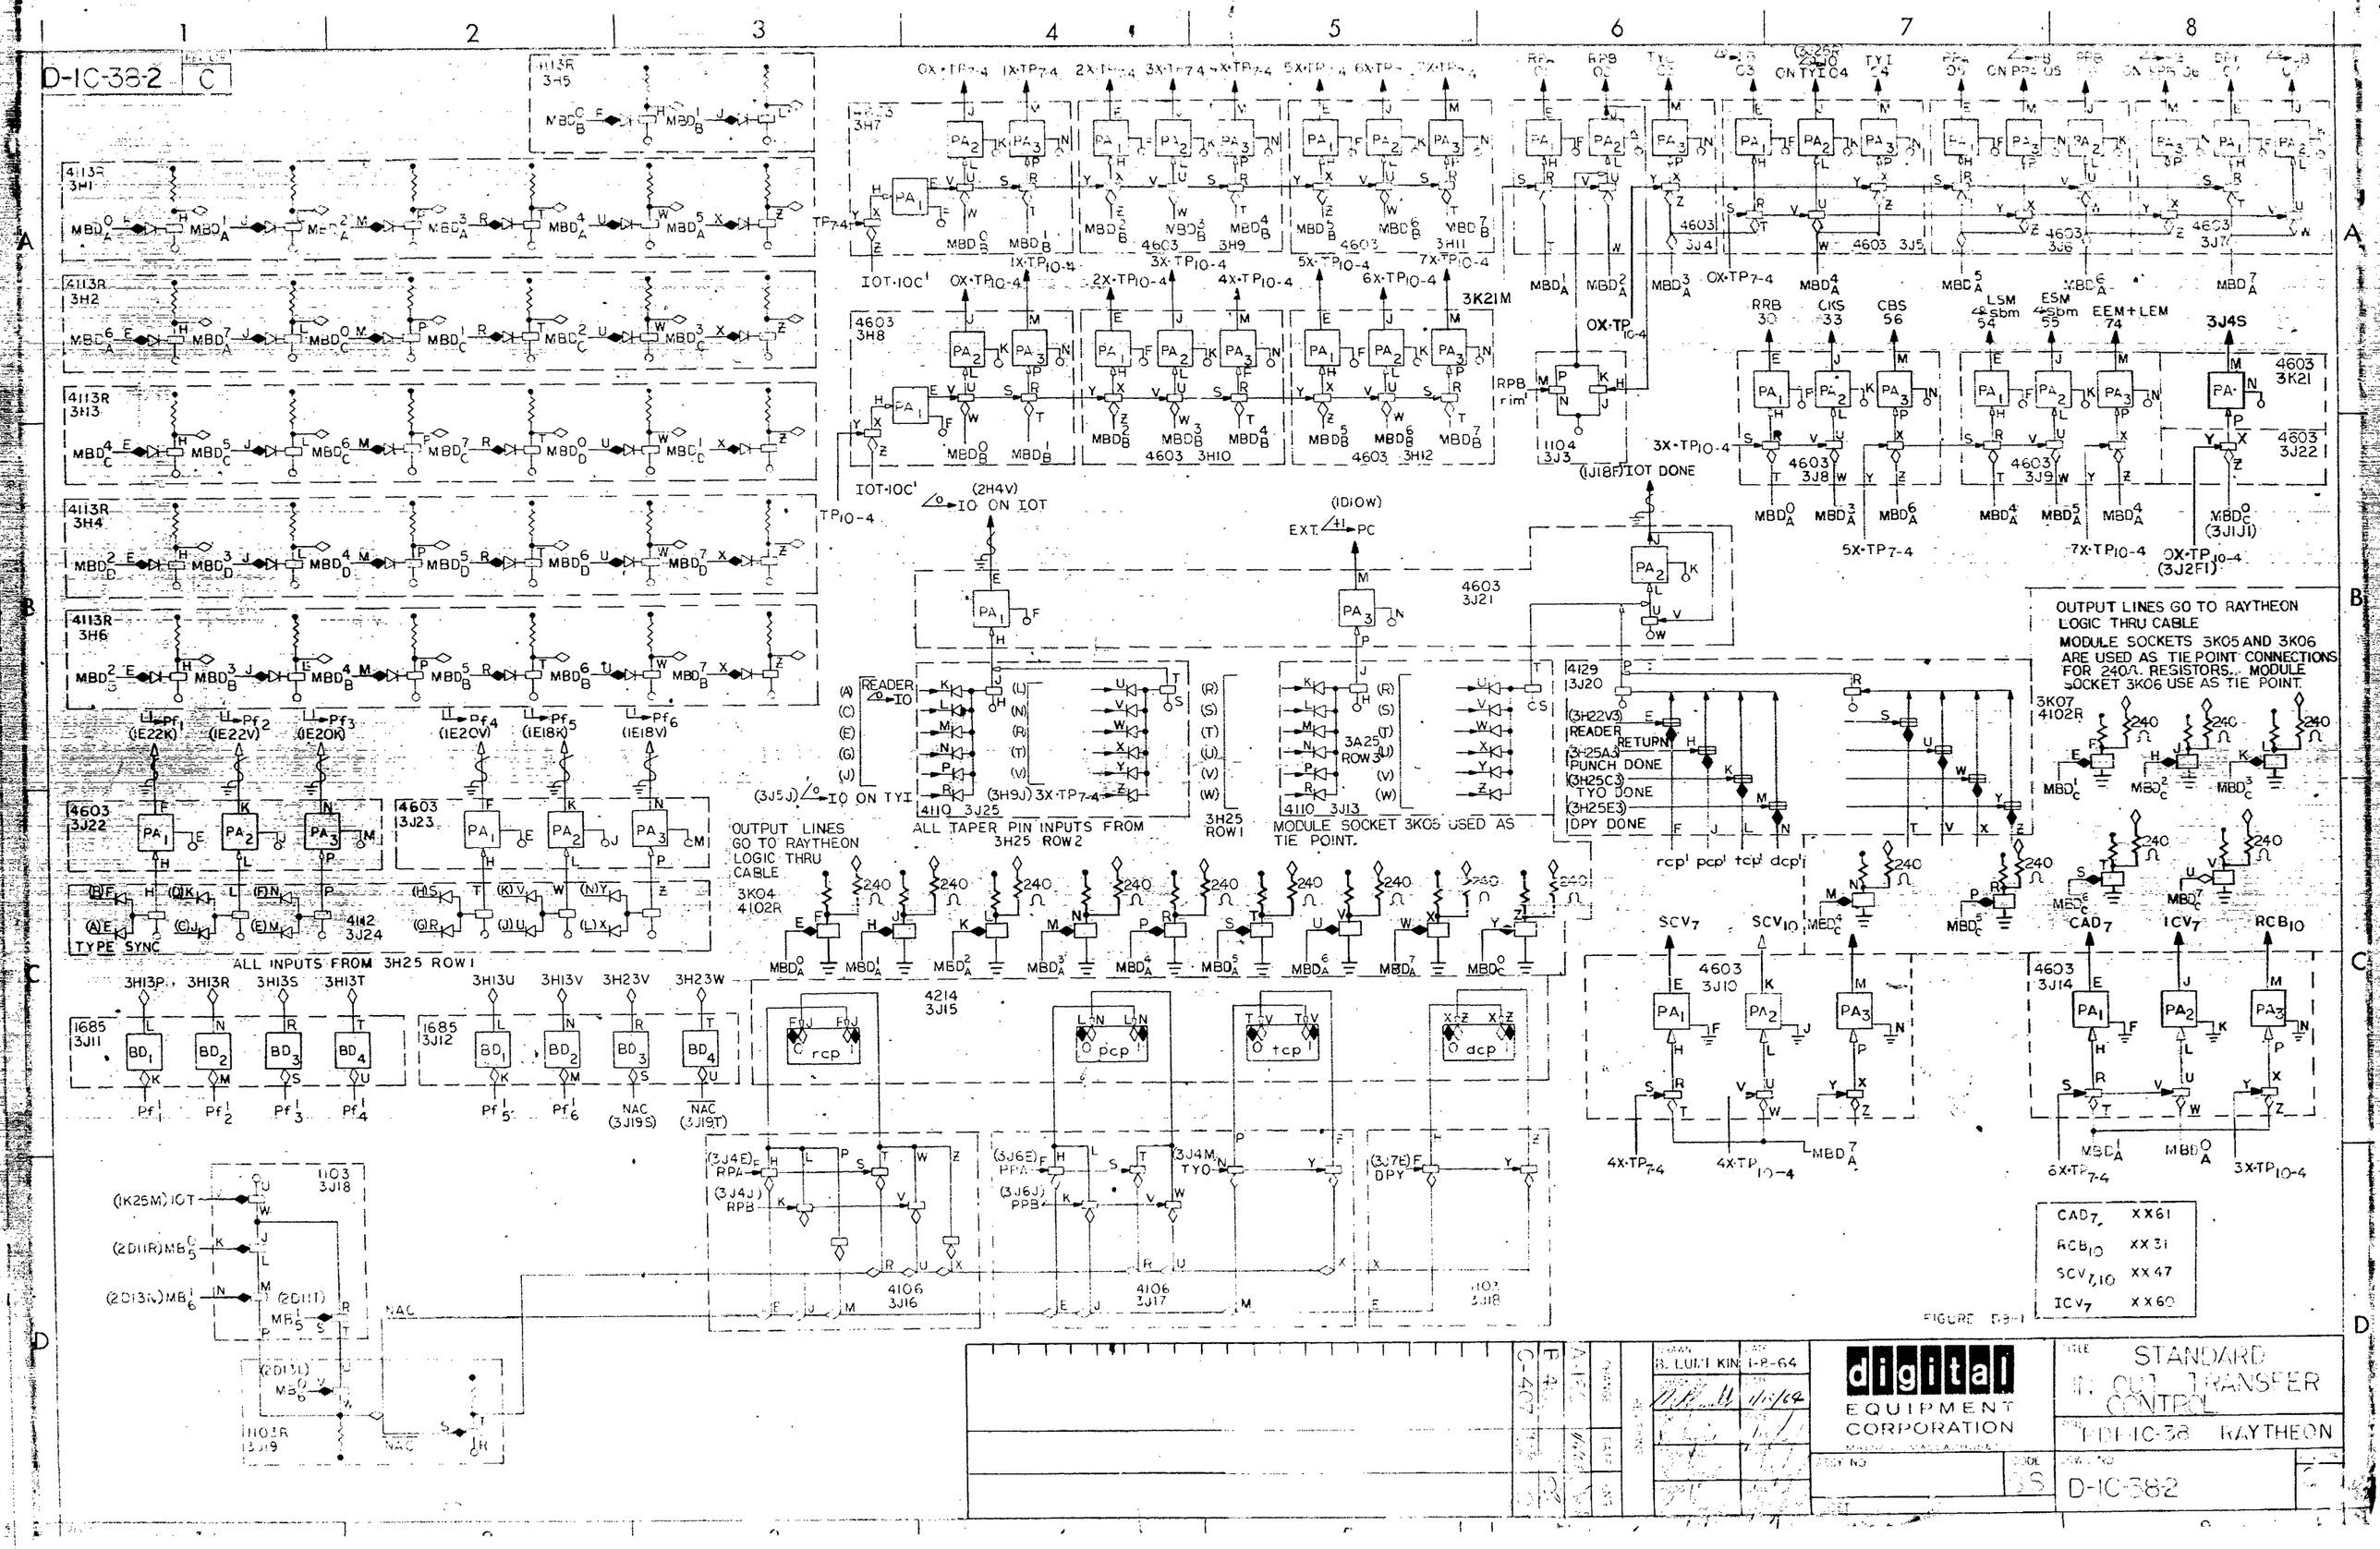
D-IC-38-2
C
OUTPUT LINES GO TO RAYTHEON LOGIC THRU CABLE
MODULE SOCKETS 3K05 AND 3K06 ARE USED AS TIE POINT CONNECTIONS FOR 240Ω RESISTORS. MODULE SOCKET 3K06 USE AS TIE POINT.
ALL TAPER PIN INPUTS FROM 3H25 ROW 2
MODULE SOCKET 3K05 USED AS TIE POINT.
ALL INPUTS FROM 3H25 ROW 1
TYPE SYNC
CAD7 XX61
ACB10 XX31
SCV7,10 XX47
ICV7 XX60
STANDARD I/O TRANSFER CONTROL
PDP-IC-38 RAYTHEON
digital EQUIPMENT CORPORATION
D-IC-38-2

FIGURE D3-1