


RH11-RS03

RH11 RS03/LA RS04 DATA RLBTY
MD-11-DZRSC-E

EP DZRSC DL E
COPYRIGHT 73-76
FICHE 1 OF 1

FEB 1979
digital
MADE IN USA

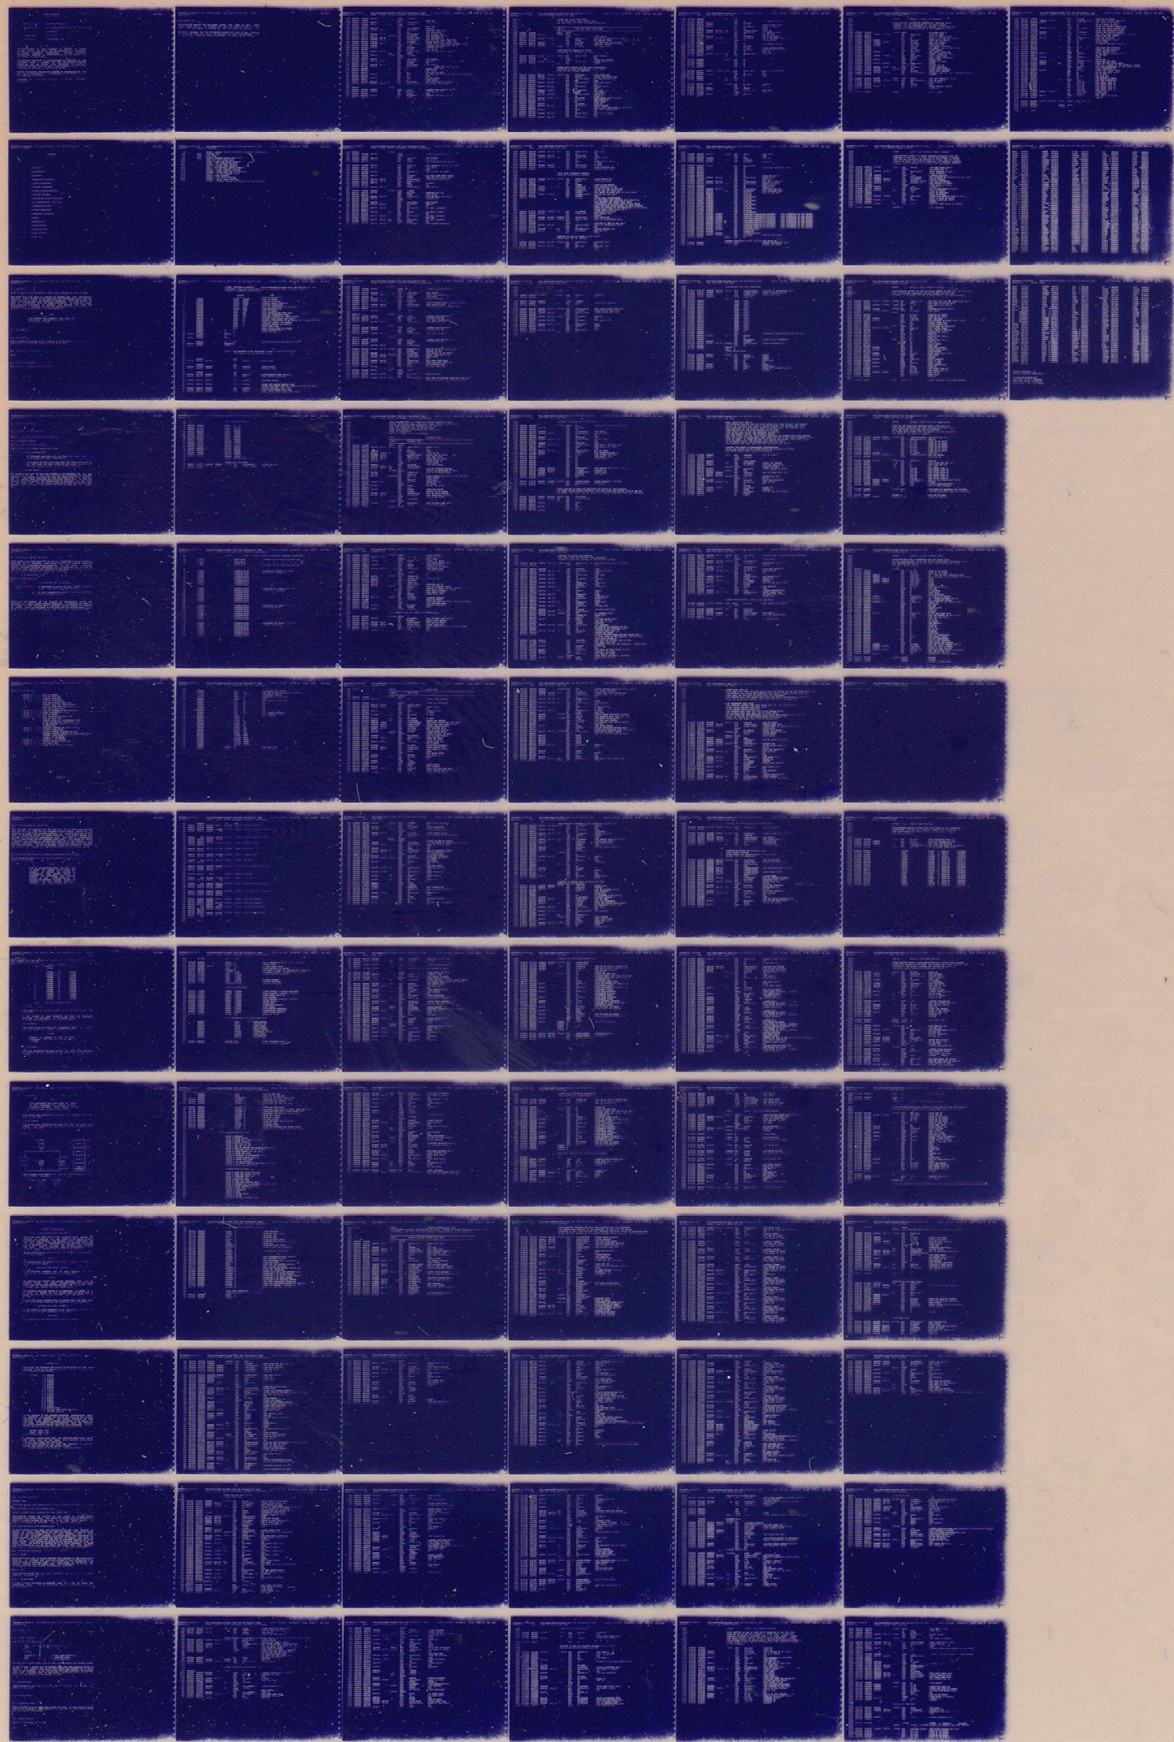

IDENTIFICATION

SEP 0001

PRODUCT CODE: MAINDEC-11-DZRS-C-E-D
PRODUCT NAME: RW11-RS03-RS03/LA-RS04 DATA RELIABILITY
 DIAGNOSTIC
PROGRAM DATE: AUG 1976
MAINTAINER: DIAGNOSTIC GROUP

THE INFORMATION IN THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE AND SHOULD NOT BE CONSTRUED AS A COMMITMENT BY DIGITAL EQUIPMENT CORPORATION. DIGITAL EQUIPMENT CORPORATION ASSUMES NO RESPONSIBILITY FOR ANY ERRORS THAT MAY APPEAR IN THIS MANUAL.

THE SOFTWARE DESCRIBED IN THIS DOCUMENT IS FURNISHED TO THE PURCHASER UNDER A LICENSE FOR USE ON A SINGLE COMPUTER SYSTEM AND CAN BE COPIED (WITH INCLUSION OF DIGITAL'S COPYRIGHT NOTICE) ONLY FOR USE IN SUCH SYSTEM, EXCEPT AS MAY OTHERWISE BE PROVIDED IN WRITING BY DIGITAL.

DIGITAL EQUIPMENT CORPORATION ASSUMES NO RESPONSIBILITY FOR THE USE OR RELIABILITY OF ITS SOFTWARE ON EQUIPMENT THAT IS NOT SUPPLIED BY DIGITAL.

COPYRIGHT (C) 1973, 1974, 1975, 1976 BY DIGITAL EQUIPMENT CORPORATION

CONTENTS
.....

- 1. ABSTRACT
- 2. REQUIREMENTS
 - 2.1 EQUIPMENT
 - 2.2 PRELIMINARY PROGRAMS
- 3. LOADING PROCEDURE
- 4. STARTING PROCEDURE
 - 4.1 CONTROL SWITCH SETTINGS
 - 4.2 STARTING ADDRESS
- 5. OPERATIONAL SWITCH SETTINGS
 - 5.1 DATA RELIABILITY TEST MODE
 - 5.2 CONVERSATION MODE
 - 5.3 ROUTINE ABSTRACTS
 - 5.4 SUBROUTINE ABSTRACTS
- 6. ERRORS
- 7. RESTRICTIONS
- 8. MISCELLANEOUS
 - 8.1 EXECUTION TIME
 - 8.2 STACK POINTER
 - 8.3 POWER FAIL

1. ABSTRACT

THIS DIAGNOSTIC WAS DESIGNED TO TEST R803, R803/LA AND R804 DRIVES.

THE DZRSB DISK DATA TEST IS A SERIES OF ADDRESS AND DATA RELIABILITY ROUTINES WHICH VERIFY TO THE USER THAT THE CONTROLLER (RH11) AND THE DISKS (R803/LA OR R804) ARE OPERATING CORRECTLY. THIS TEST SHOULD BE USED IN CONJUNCTION WITH THE DZRSB DIAGNOSTIC. IF THERE IS A POWER FAIL WHILE THE DIAGNOSTIC IS RUNNING, THE PROGRAM WILL WAIT FOR APPROXIMATELY 5 MINUTES, TO GIVE ALL THE DRIVES TIME TO COME BACK UP TO SPEED, BEFORE RESTARTING THE TEST SEQUENCE.

NOTE

THIS PROGRAM WILL DESTROY ALL DATA ON THE DISKS. TURN OFF ALL DRIVES THAT YOU DO NOT WANT TO TEST.

2. REQUIREMENTS

2.1 EQUIPMENT

PDP11 STANDARD COMPUTER WITH A MINIMUM OF 8K OF MEMORY, AND AN RH11 CONTROLLER WITH AN R803, R803/LA OR AN R804 DISK.

2.2 PRELIMINARY PROGRAMS

DZRSB

3. LOADING PROCEDURE

USE STANDARD PROCEDURE FOR ABS TAPES.

4. STARTING PROCEDURE

4.1 CONTROL SWITCH SETTINGS

SEE 5. (ALL DOWN FOR WORST CASE TESTING)

4.2 STARTING ADDRESS

PROGRAM AND/OR OPERATOR ACTION

LOAD PROGRAM INTO MEMORY USING ABS LOADER.

1. STARTING ADDRESS 200.

- A. SET SWITCHES (SEE SEC 5.). ALL DOWN FOR WORST CASE (IF SWITCH-LESS CPV SIMPLY PRESS START)
- B. THE DISPLAY ON THE 11/45 WILL SHOW THE ITERATION COUNT IN THE LEFT BYTE AND TEST NUMBER IN THE RIGHT. TO USE, SET THE DATA DISPLAY SWITCH TO THE DISPLAY POSITION.
- C. PRESS START.

THE PROGRAM WILL NOW MAP THE DATA BUFFERS IN 4K SEGMENTS ON -A- AND -B- PORTS UP TO 28K. IT WILL THEN TYPE OUT THE PARAMETERS OF THE DATA BUFFERS. THE PROGRAM WILL ONLY DO THIS THE FIRST TIME IT IS STARTED, FOR IT STORES THESE ADDRESSES AND CONTINUES USING THEM. TO HAVE THE PROGRAM REMAP THE SYSTEM, THE PROGRAM MUST BE RELOADED. IF YOU WISH TO GET ABOVE 28K, YOU CAN ENTER CONVERSATION MODE AND PUT THE DATA BUFFERS WHERE YOU WISH. THE SIZE OF THE DATA BUFFERS CAN NOT EXCEED 24K.

5. OPERATIONAL SWITCH SETTINGS

THIS PROGRAM HAS BEEN MODIFIED TO RUN ON A PROCESSOR WITH OR WITHOUT A HARDWARE SWITCH REGISTER. WHEN FIRST EXECUTED THE PROGRAM TESTS THE EXISTENCE OF A HARDWARE SWITCH REGISTER. IF NOT FOUND A SOFTWARE SWITCH REGISTER LOCATION (SWREG=LOC.176) IS DEFAULTED TO. IF THIS IS THE CASE, UPON EXECUTION THE CONTENTS OF THE SWREG ARE DUMPED IN OCTAL ON THE CONSOLE TTY AND ANY CHANGES ARE REQUESTED.

(I.E) SWR=XXXXXX NEW

POSSIBLE RESPONSES ARE:

1. <CR> IF NO CHANGES ARE TO BE MADE.
2. 6 DIGITS 0-7 TO REPRESENT IN OCTAL THE NEW SWITCH REGISTER VALUE: LAST DIGIT FOLLOWED BY <CR>.
3. ^U TO ALLOW REENTERING VALUE IF ERROR IS COMMITTED KEYING IN SWREG VALUE.

BUILT INTO THE PROGRAM IS THE ABILITY TO DYNAMICALLY CHANGE THE CONTENTS OF SWREG DURING PROGRAM EXECUTION. BY STRIKING ^G (CNTRL G) ON CONSOLE TTY THE OPERATOR SETS A REQUEST FLAG TO CHANGE THE CONTENTS OF SWREG, WHICH IS PROCESSED IN KEY AREAS OF THE PROGRAM CODE (I.E.) ERROR ROUTINES, AFTER HALTS END OF PASS, AND OTHER APPLICABLE AREAS.

SWITCH SETTINGS ARE:

SW<15> = 1 HALT ON ERROR
SW<14> = 1 LOOP ON FUNCTION
SW<13> = 1 INHIBIT PRINTOUT
SW<12> = 1 INHIBIT COMPARISON
WITH THIS SWITCH SET, THE
PROGRAM WILL NOT COMPARE THE
DATA IT READ FROM THE DISK WITH
THE KNOWN GOOD DATA.
SW<11> = 1 HALT ON COMPLETION OF TRANSFER
SW<10> = 1 ENTER CONVERSATION MODE
SW<09> = 1 LOOP ON ERROR
SW<08> = 1 DATA RELIABILITY TEST MODE
SW<07> = 1 WAIT IN WAIT MODE
PROGRAM RUNS IN A BACKGROUND TEST
WHILE WAITING FOR INTERRUPT, WITH
SW SET PROGRAM WAITS IN A WAIT
INSTRUCTION.
SW<06> = 1 OPTIONAL TYPEOUT OF RETRY ERRORS
SW<05> = 1 INHIBIT PASS COUNT
SW<04> = 1 ALLOWS 0 ERROR TYPEOUTS IN THE
COMPARE ROUTINE BEFORE EXECUTING NEXT READ
COMMAND. WHEN SWITCH IS 0, ONLY 1 ERROR
TYPEOUT IS RECORDED.
SW<03> = 1 TYPEOUT 0 OF ERRORS
SW<02> = 1 INHIBIT MEMORY MANAGEMENT
SW<01> = 1 DATA TEST ONLY
SW<00> = 1 DROPS DRIVE AFTER 20 ERRORS

5.1 DATA RELIABILITY TEST MODE

WITH SW8 SET, THE PROGRAM WILL SET THE "BAI" BIT IN RHCS2 AND TRANSFER 64K OF DATA AT A TIME FOR ALL PATTERNS EXCEPT RANDOM. RANDOM WILL BE EXECUTED AS USUAL WITH STANDARD BUFFERS. NO COMPARES ARE DONE IN THIS MODE OF OPERATION EXCEPT ON RANDOM PATTERNS. THIS OPTION SHOULD ONLY BE USED IN DATA TEST OR CONVERSATION MODE. WHEN USED IN CONVERSATION MODE IT OVER RIDES THE NON STANDARD WORD COUNT. YOU SHOULD NOT SELECT A DESIRED DISK ADDRESS IN CONVERSATION MODE FOR IT CAN PRODUCE A DISK ADDRESS OVERFLOW ERROR FOR THIS DATA RELIABILITY TEST MODE ONLY DOES 64K WORD TRANSFERS. IF SW8 IS CHANGED, WHILE THE PROGRAM IS RUNNING, THE PROGRAM WILL FINISH ITS PASS BEFORE EXECUTING THE SWITCH CHANGE.

5.2 CONVERSATION MODE FOR PROGRAM PARAMETERS FOR DATA TEST ONLY

IN CONVERSATION MODE THE OPERATOR CAN SPECIFY ANY ONE OR ALL OF THE PROGRAM PARAMETERS.

NOTE

ONCE IN CONVERSATION MODE, THE ONLY WAY TO REMAP THE SYSTEM IS TO RELOAD THE PROGRAM. TO RESTART THE PROGRAM IN CONVERSATION MODE WITHOUT HAVING TO REANSWER THE QUESTIONS, THE STARTING ADDRESS IS 210. RESET SWITCH 10. TO RESTART THE PROGRAM WITHOUT HAVING TO REANSWER THE PORT SIZING QUESTIONS, RESTART AT 220. RESET SWITCH 10.

THE PROGRAM WILL NOW ASK SEVERAL QUESTIONS, THE TABLE BELOW WILL HELP YOU ANSWER THE QUESTIONS.

TYPE TO START AT		TYPE TO START AT	
0	000000		
1	020000	20	400000
2	040000	21	420000
3	060000	22	440000
4	100000	23	460000
5	120000	24	500000
6	140000	25	520000
7	160000	26	540000
10	200000	27	560000
11	220000	30	600000
12	240000	31	620000
13	260000	32	640000
14	300000	33	660000
15	320000	34	700000
16	340000	35	720000
17	360000	36	740000

NOTE: TYPE ONLY NUMBERS SHOWN!!!

1. -A- PORT? (Y OR N)

THIS GIVES YOU THE OPTION TO TEST -A- OR -B- PORT USING THE DATA TEST.

IF THE ANSWER TO THIS QUESTION IS YES, THE FOLLOWING QUESTIONS WILL BE ASKED. IF THE ANSWER IS NO, -B- PORT WILL BE TESTED AND QUESTIONS 4 AND 5 WILL BE ASKED.

2. 1ST 4K BANK 0

THIS NUMBER THAT IS TYPED WILL DETERMINE WHERE THE BUFFER AREA WILL START ON -A- PORT. USE TABLE ABOVE

NOTE:

PROGRAM IS LOCATED IN 1ST 4K BANK. THEREFORE, THIS BANK CAN NOT BE USED AS A BUFFER.

3. # OF 4K BANKS ?

THIS WILL DETERMINE THE SIZE OF THE -A- PORT DATA BUFFER. THE SIZE OF THE DATA BUFFER CAN NOT EXCEED 24K AND MUST BE IN "OCTAL".

He

4. 1ST 4K BANK 0

NOTE

THIS DIAGNOSTIC WILL ONLY TEST -B- PORT IF THE PROCESSOR HAS ACCESS TO THAT MEMORY ON -B- PORT. THIS MEMORY MUST HAVE THE SAME ADDRESS ON ALL PORTS.

THIS NUMBER WILL DETERMINE WHERE THE DATA BUFFER AREA WILL START ON -B- PORT.

5. # OF 4K BANKS?

THIS NUMBER WILL DETERMINE THE SIZE OF THE -B- PORT DATA BUFFER. THE SIZE OF THE DATA BUFFER CAN NOT EXCEED 24K AND MUST BE IN "OCTAL".

EXAMPLE:

```

12K XXXXX          XXXXXXXXXXXXX 16K
  X  X
  XMEMX
  X  X
  8K  XXXXX          XXXXXXXXXXXXX 12K
    X
XXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXX
X
X
XXXXXXXX          X-B-PORT          XXXXXXXXXXXXX 8K
X  X              X                  X BANK 1 X
X CPU X          8K XXXXX          XXXXXXXX
X  X              XMEMX             X RH X
XXXXXXXX          0 XXXXX          XXXXXXXX          4K
X
X
XXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXX          X BANK 0 X
X PROGRAM X
XXXXXXXXXXXXX 0
    
```

THESE ANSWERS GIVEN BELOW WILL TEST THE CONFIGURATION IN THE GIVEN EXAMPLE. ANSWERS:

TO TEST	-A- PORT	-B- PORT
	1) Y	1) N
	2) 1	4) 2
	3) 1	5) 1

PROGRAM CONVERSATION

MULTI DRIVE MODE? (YES-NO)

MULTI DISK MODE IS A MODE IN THE PROGRAM WHICH ALLOWS THE OPERATOR TO EXERCISE ALL THE DISKS ON THE SYSTEM WITHOUT RE-STARTING THE PROGRAM. THE PROGRAM, AFTER EXERCISING ONE DISK WILL REPORT A MESSAGE TELLING THE OPERATOR WHICH DISK WILL BE SELECTED NEXT, AND THEN THE PROGRAM WILL EXERCISE THAT DISK. WHEN A COMPLETE PASS IS ACCOMPLISHED, A PASS COMPLETE WILL BE REPORTED AND THE TEST WILL RECYCLE.

IF THE ANSWER TO THE MULTI DRIVE MODE WAS "NO", THE FOLLOWING QUESTION IS ASKED.

UNIT #

THE OPERATOR CAN NOW SELECT THE UNIT HE WISHES TO TEST BY TYPING THE UNIT NUMBER.

OPTIONAL WORD COUNT (YES-NO)

IF THE OPERATOR ANSWERS "NO" TO THIS QUESTION THE NEXT QUESTION WILL BE DELETED FROM THE CONVERSATION.

WD CT

THE OPERATOR CAN SPECIFY ANY LENGTH TRANSFER FROM 1(8) TO 60000(8) WORDS. THE NORMAL TRANSFER LENGTH IS N(8) WORDS WHERE N IS THE MAXIMUM BUFFER SIZE FOR THE AVAILABLE CORE. IN EITHER CASE, BUFFER WILL NOT EXCEED 24 K.

THIS PROGRAM MAPS THE SYSTEM IN 4K SEGMENTS. IF THERE IS A 1K BLOCK OF MEMORY ON THE SYSTEM THAT YOU WOULD LIKE TO REACH, YOU CAN TYPE IN THAT 4K BANK # AND THEN SPECIFY A WC OF 2000.

IF THE WORD COUNT NUMBER TYPED, IS LARGER THAN THE CORE SIZE GIVEN IN THE SETUP ROUTINE, THE QUESTION WILL BE REPEATED.

OPTIONAL DSK ADDR (YES-NO)

IF THE ANSWER TO THIS QUESTION IS NO, THE WHOLE DISK WILL BE WRITTEN AND THE NEXT QUESTION IS NOT ASKED.

DSK ADDR

THE OPERATOR CAN NOW SPECIFY THE STARTING SECTOR

PATTERN NO.?

THIS GIVES THE OPERATOR THE OPTION OF SELECTING ALL THE DATA PATTERNS (822) OR ANY ONE DATA PATTERN, SIMPLY BY TYPING THE DATA PATTERN NUMBER DESIRED.

PATTERN	0	•	000000
"	1	•	177777
"	2	•	031463
"	3	•	066666
"	4	•	100001
"	5	•	107070
"	6	•	070707
"	7	•	052525
"	10	•	125252
"	11	•	177737
"	12	•	146314
"	13	•	136363
"	14	•	063636
"	15	•	000001
"	16	•	100005
"	17	•	155555
"	20	•	133333
"	21	•	RANDOM DATA
"	22	•	RUN ALL DATA PATTERNS UNDER PROGRAM CONTROL

IN THIS SECTION OF THE PROGRAM PARAMETER CONVERSATION MODE, THE OPERATOR CAN SELECT ANY ONE OR ALL THREE OF THE CONTROL FUNCTIONS TO BE EXECUTED. THE NORMAL SEQUENCE OF DISK FUNCTIONS UNDER PROGRAM CONTROL ARE WRITE, WRITE CHECK, AND THEN READ. BY ENTERING THE CONVERSATION MODE THE OPERATOR HAS GAINED COMPLETE CONTROL OVER THE DISK FUNCTIONS. HE MUST SPECIFY YES OR NO TO ALL OF THE FOLLOWING QUESTIONS.

WRITE? (YES - NO)
READ? (YES - NO)
WRITE CHECK? (YES - NO)

TO PERFORM A WRITE CHECK ONLY, THE OPERATOR MUST FIRST WRITE SOME KNOWN DATA ON THE DISK. THIS COURSE OF ACTION ALSO PREVAILS FOR A READ ONLY OPERATION.
• IF AN ERROR OCCURS IN THE LINE THE OPERATOR IS TYPING, DEPRESS THE RUB-OUT KEY AND RETYPE ANSWER.
ALL ANSWERS SHOULD BE FOLLOWED BY A CARRIAGE-RETURN

5.3 ROUTINE ABSTRACTS

ADDRESS TEST

THIS TEST WRITES EACH SECTOR WITH ITS OWN ADDRESS THEN READS IT BACK AND COMPARES IT FOR THE CORRECT DATA.

RANEX - RANDOM DATA, ADDRESS AND WORD COUNT TEST

THIS ROUTINE TESTS THE ABILITY OF THE SYSTEM TO ACCESS RANDOM ADDRESSES WITH RANDOM DATA. ONE SECTOR OF RANDOM DATA IS WRITTEN AT A STARTING RANDOM ADDRESS ON THE DISK. IT IS THEN WRITE CHECKED AND READ. ALL ERRORS ARE REPORTED. THIS IS REPEATED 1000 TIMES.

DATA RELIABILITY - DATA PATTERN TEST

IN THIS PORTION OF THE TEST, THE RELIABILITY OF THE DISK SURFACE IS TESTED BY WRITE, WRITE CHECK, AND READ FUNCTIONS. THE ROUTINE FIRST WRITES THE COMPLETE SURFACE WITH A SET DATA PATTERN, THEN A WRITE CHECK OF THE COMPLETE SURFACE IS ACCOMPLISHED, THUS REPORTING ALL ERRORS BETWEEN THE DATA WRITTEN AND THE DATA IN MEMORY. THE DISK IS THEN READ. THE DATA READ FROM THE DISK IS COMPARED AGAINST THE KNOWN DATA PATTERN. THIS COMPARE IS TAKING PLACE THE SAME TIME THE DISK IS BEING READ. THE BUFFER IS CLEARED AS IT IS BEING COMPARED. IF THERE ARE DATA BUFFERS ON -A- AND -B- PORTS, THE DATA TEST WILL TRANSFER DATA OVER -A- PORT ON ODD PASSES AND OVER -B- PORT ON EVEN PASSES.

5.4 SUBROUTINE ABSTRACTS

5.4.1 SCOPE

THIS SUBROUTINE CALL IS PLACED BETWEEN EACH SUBTEST IN THE INSTRUCTION SECTION. IT RECORDS THE STARTING ADDRESS OF EACH SUBTEST AS IT IS BEING ENTERED IN LOCATION "LAD". IF A SCOPE LOOP IS REQUESTED, THE CURRENT SUBTEST WILL BE LOOPED UPON. THE CONTENTS OF LAD MAY BE USED TO DETERMINE THE LAST SUBTEST SUCCESSFULLY COMPLETED.

5.4.2 HLT

THIS ROUTINE PRINTS OUT AN ERROR MESSAGE (SEE 6.1). TO INHIBIT TYPEOUTS, PUT SW<13> ON A 1.

5.4.3 TRAPCATCHER

A ".+2" - "HALT" SEQUENCE IS REPEATED FROM 0 - 776 TO CATCH ANY UNEXPECTED TRAPS. THUS ANY UNEXPECTED TRAPS OR INTERRUPTS WILL HALT AT THE VECTOR + 2.

6. ERRORS

6.1 ERROR PRINTOUT

THE FORMAT IS AS FOLLOWS:

```
ADR   CS1  # ----- CS2  # ----- ER  # -----  
GOOD      # ----- BAD  # -----
```

WHERE:

```
CS1,CS2,ER ETC.      # RS11 DISK REGISTERS.  
GOOD                 # EXPECTED DATA.  
BAD                  # DATA RECEIVED.
```

TO FIND THE FAILING TEST, LOOK AT THE LISTING ABOVE THE ADDRESS TYPED.

IF SW0 IS SET, A DRIVE WILL BE DROPPED FROM THE TEST SEQUENCE AFTER 20 ERRORS. THE PROGRAM WILL STATE WHICH DRIVE WAS DROPPED AND ON WHICH PASS IT WAS DROPPED. IF ALL THE DRIVES HAVE BEEN DROPPED, THE PROGRAM WILL TYPE "TESTING UNIT 0" AND HALT, INDICATING THAT IT COULD NOT FIND ANY MORE DRIVES ON THE SYSTEM TO TEST.

7. RESTRICTIONS

THIS DIAGNOSTIC WILL TEST -B- PORT, ONLY IF THE CPU CAN ACCESS THAT MEMORY ON -B- PORT.

8. MISCELLANEOUS

8.1 EXECUTION TIME

PASS COMPLETE WILL BE TYPED OUT AT END OF PASS. IT WILL TAKE 10 TO 20 MINUTES TO COMPLETE A PASS DEPENDING ON THE TYPE OF DRIVE BEING TESTED AND THE SIZE OF THE SYSTEM.

8.2 STACK POINTER

STACK IS INITIALLY SET TO 500

0.3 POWER FAIL

THE STARTING ADDRESS FOR THE WRITE POWER FAIL TEST IS 244. WHEN ASKED, ENTER UNIT 0. THE PROGRAM WILL TELL THE OPERATOR WHEN TO POWER DOWN. WHEN THE SYSTEM IS POWERED UP, ONLY ONE ERROR IS ALLOWED. THE

STARTING ADDRESS FOR THE WRITECHECK POWER FAIL TEST IS 250. HERE AS IN THE WRITE POWER FAIL TEST, THE PROGRAM WILL TELL THE OPERATOR WHEN TO POWER DOWN. WHEN THE POWER COMES BACK, NO ERRORS SHOULD OCCUR.

TABLE OF CONTENTS

82		\$KMMR - KERNAL MEMORY MANAGEMENT REGISTER ASSIGNMENTS
627	TST1	ADDRESS TEST
705	TST2	DATA TEST
881	TST3	RANDOM ADDRESS RANDOM DATA TEST
1023	TST4	TEST FOR MULTI DISK MODE
1969		\$DONE - BELL AND SCOPE ROUTINE
2161		\$TYPE - TTY TYPEOUT ROUTINE
2201		\$SCOPE - SCOPE LOOP HANDLER
2240		\$HLT - HLT ROUTINE (ERROR TYPEOUT)
2270		\$OCTAL - OCTAL TYPEOUT ROUTINE
2310		\$POWER - POWER DOWN AND UP ROUTINES
2358		\$TYPEA - 18 BIT ADDRESS TYPED
2415		\$TRAP - TRAP HANDLER
2447		\$RDLIN - TTY INPUT ROUTINE
2508		\$RDOCT - OCTAL INPUT ROUTINE
2702		\$TYPED - CONVERT BINARY TO DECIMAL AND TYPE ROUTINE

```

1      .TITLE MAINDEC-11-DERSCE-E      RH11-R803-R803/LA-R804 DATA AND RELIABILITY TEST
2      ;COPYRIGHT 1973,1974,1975,1976 DIGITAL EQUIPMENT CORP., MAYNARD, MASS.
3      ;PROGRAM BY STANLEY HARACKIEWICZ
4
5      ;          SWITCH          USE
6      ;          -----          -----
7      100000      SW15= 100000      ;HALT ON ERROR
8      040000      SW14= 40000      ;LOOP ON FUNCTION
9      020000      SW13= 20000      ;INHIBIT ERROR TYPEOUTS
10     010000      SW12= 10000      ;INHIBIT COMPARISON
11     004000      SW11= 4000       ;HALT ON COMPLETION OF TRANSFER
12     002000      SW10= 2000       ;CONVERSATION MODE
13     001000      SW9= 1000        ;LOOP ON ERROR
14     000400      SW8= 400         ;DATA RELIABILITY TEST MODE
15     000200      SW7= 200         ;WAIT IN BACKGROUND TEST
16     000100      SW6= 100         ;OPTIONAL TYPEOUT OF RETRY ERRORS
17     000040      SW5= 40          ;INHIBIT PASS COUNT AND UNIT
18     000020      SW4= 20          ;ALLOWS 8 LOCATIONS TO BE TESTED IN COMPARE ROUTINE
19     000010      SW3= 10          ;TYPE OUT TOTAL # OF ERRORS
20     000004      SW2= 4           ;INHIBIT MEMORY MANAGEMENT
21     000002      SW1= 2           ;DATA TEST ONLY
22     000001      SW0= 1           ;DROP DRIVE AFTER 20 ERRORS
23     .#          0                ;TRAP CATCHER FROM 0 - 776
24     .#          46                ;HOOKS FOR ACT 11
25     000046      SENDAD          .#          52
26     000052      BIT14          .#          174
27     000052      040000          DISPREG:0
28     .#          0                SWREG: 0
29     000174      000174          ;SOFTWARE SWITCH REGISTER LOCATION
30     000174      000000
31     000176      000000
32
33
34     ;NOTE: FOR PROGRAM TO BE RESTARTED AT 200 IT MUST BE RELOADED
35     ; INTO MEMORY DUE TO ONCE ONLY CODE.
36
37
38     .#          200
39     000200      000137 001230  JMP      SETSWI      ;START TEST
40
41     .#          210
42     000210      012706 000500  MOV      0500,SP      ;SETUP STACK
43     000214      000137 003224  JMP      00ADTST      ;RESTART ADDR
44
45     .#          220
46     000220      012706 000500  MOV      0500,SP      ;CONVERSATION MODE WITHOUT
47     000224      000137 002374  JMP      00A1         ;DATA BUFFER QUESTIONS
48
49     .#          230
50     000230      000137 015154  JMP      00RLDR      ;RESTORE LOADER
51
52     .#          234
53     000234      000137 003316  JMP      00ADTL      ;TRACK AND SECTOR SELECT TEST
54     000240      000137 005050  JMP      00RANEL     ;WRITE EACH WORD ADDR ON ITSELF AND READ IT BACK
55     000244      000137 012466  JMP      00PFT1      ;RANDOM ADDRESS, DATA TEST
56     000250      000137 013014  JMP      00PFT2      ;DISK WRITE POWER FAIL TEST
57     ;DISK WRITE CHECK POWER FAIL TEST

```

56
57
58 000254 000000
59 000256 177777
60 000260 031463
61 000262 066666
62 000264 100001
63 000266 107070
64 000270 070707
65 000272 052525
66 000274 125252
67 000276 177737
68 000300 146314
69 000302 136363
70 000304 063636
71 000306 000001
72 000310 100005
73 000312 155555
74 000314 133333
75
76
77
78 000316 012777 000040 000510
79 000324 013777 001160 000502
80 000332 000002
81

;RH11 DATA PATTERNS

PAT0: 0
PAT1: 177777
PAT2: 031463
PAT3: 066666
PAT4: 100001
PAT5: 107070
PAT6: 070707
PAT7: 052525
PAT10: 125252
PAT11: 177737
PAT12: 146314
PAT13: 136363
PAT14: 063636
PAT15: 000001
PAT16: 100005
PAT17: 155555
PAT20: 133333
;PAT21 RANDOM DATA

;CLEAR ALL REGISTERS

.CLR DV: MOV 040,ORSC82 ;CLEAR ALL REG
MOV UNNUM,ORSC82 ;GET UNIT 0
RTI

	.SBTTL	SKMMR - KERNAL MEMORY MANAGEMENT REGISTER ASSIGNMENTS	
82			
83			
84	177572	SR0=177572	;ADDRESS OF MEM MGMT REGISTER SR0
85	177574	SR1=177574	; " " " " " SR1
86	177576	SR2=177576	; " " " " " SR2
87	172516	SR3=172516	;ADDRESS OF MEM MGMT REGISTER SR3
88			
89	172300	KIPDR0=172300	;ADDRESS OF KERNEL 'I' PAGE
90	172302	KIPDR1=172302	;DESCRIPTOR REGISTERS
91	172304	KIPDR2=172304	
92	172306	KIPDR3=172306	
93	172310	KIPDR4=172310	
94	172312	KIPDR5=172312	
95	172314	KIPDR6=172314	
96	172316	KIPDR7=172316	
97			
98	172320	KDPDR0=172320	;ADDRESSES OF KERNEL 'D' PAGE
99	172322	KDPDR1=172322	;DESCRIPTOR REGISTERS
100	172324	KDPDR2=172324	
101	172326	KDPDR3=172326	
102	172330	KDPDR4=172330	
103	172332	KDPDR5=172332	
104	172334	KDPDR6=172334	
105	172336	KDPDR7=172336	
106			
107	172340	KIPAR0=172340	;ADDRESSES OF KERNEL 'I' PAGE
108	172342	KIPAR1=172342	;ADDRESS REGISTERS
109	172344	KIPAR2=172344	
110	172346	KIPAR3=172346	
111	172350	KIPAR4=172350	
112	172352	KIPAR5=172352	
113	172354	KIPAR6=172354	
114	172356	KIPAR7=172356	
115			
116	172360	KDPAR0=172360	;ADDRESSES OF KERNEL 'D' PAGE
117	172362	KDPAR1=172362	;ADDRESS REGISTERS
118	172364	KDPAR2=172364	
119	172366	KDPAR3=172366	
120	172370	KDPAR4=172370	
121	172372	KDPAR5=172372	
122	172374	KDPAR6=172374	
123	172376	KDPAR7=172376	

124					
125	000001		NUM	1	;INITIALIZE FOR NEWTST
126	104000		HLT	EMT	;SET HLT TO EMT FOR ERROR TYPEOUTS
127	177776		PS	177776	;PROCESSOR STATUS
128	177776		PSW	PS	;PROCESSOR STATUS WORD
129	000007		BELL	7	;BELL
130	000000		R0	00	;R0 - DEFINE REGISTERS
131	000001		R1	01	;R1
132	000002		R2	02	;R2
133	000003		R3	03	;R3
134	000004		R4	04	;R4
135	000005		R5	05	;R5
136	000006		SP	06	;R6 - STACK POINTER
137	000007		PC	07	;R7 - PROGRAM COUNTER
138	000001		BIT0	1	;BIT EQUATES
139	000002		BIT1	2	
140	000004		BIT2	4	
141	000010		BIT3	10	
142	000020		BIT4	20	
143	000040		BIT5	40	
144	000100		BIT6	100	
145	000200		BIT7	200	
146	000400		BIT8	400	
147	001000		BIT9	1000	
148	002000		BIT10	2000	
149	004000		BIT11	4000	
150	010000		BIT12	10000	
151	020000		BIT13	20000	
152	040000		BIT14	40000	
153	100000		BIT15	100000	
154	000001	GOOD	R1		;FOR GOOD DATA
155	000000	BAD	R0		;FOR BAD DATA

156		000510			.#	510		
157	000510	005015	047125	052111	LOADSW:	.ASCIZ	<15><12>	"UNIT 0 "
158	000516	021440	000040					
159	000522	005015	040506	040524	UNRECO:	.ASCIZ	<15><12>	"FATAL"<15><12><12>
160	000530	006514	005012	000				
161								
162								
163	000535	015	047412	052120	.OPDR:	.ASCIZ	<15><12>	"OPT DSK ADDR"
164	000542	042040	045523	040440				
165	000550	042104	000122					
166	000554	005015	040504	040524	DATA:	.ASCIZ	<15><12>	"DATA "
167	000562	000040						
168								
169	000564	051127	020124	051105	WRTERR:	.ASCIZ		"WRT ERR"
170	000572	000122						
171								
172	000574	051127	020124	045503	WCKERR:	.ASCIZ		"WRT CK ERR"
173	000602	042440	051122	000				
174								
175	000607	122	020104	051105	RDERR:	.ASCIZ		"RD ERR"
176	000614	000122						
177								
178	000616	005015	042522	020103	RECOV:	.ASCIZ	<15><12>	"REC RETRY CT "
179	000624	042522	051124	020131				
180	000632	052103	000040					
181								
182	000636	005015	000		CRLF:	.ASCIZ	<15><12>	
183								
184	000641	040	054450	047440	YORN:	.ASCIZ		" (Y OR N)"
185	000646	020122	024516	000				
186								
187	000653	015	030412	052123	STABUF:	.ASCIZ	<15><12>	"1ST 4K BANK 0 "
188	000660	032040	020113	040502				
189	000666	045516	021440	000040				
190								
191	000674	005015	020043	043117	BUFBIZ:	.ASCIZ	<15><12>	"0 OF 4K BANKS?"
192	000702	032040	020113	040502				
193	000710	045516	037523	000040				
194								
195	000716	005015	040522	042116	RANDM:	.ASCIZ	<15><12>	"RANDOM "
196	000724	046517	000040					
197	000730	005015	042524	052123	TSTNG:	.ASCIZ	<15><12>	"TESTING "
198	000736	047111	020107	000				
199	000743	015	050012	053517	PDOWN:	.ASCIZ	<15><12>	"POWER DOWN"
200	000750	051105	042040	053517				
201	000756	000116						
202	000760	005015	040520	044522	PARERR:	.ASCIZ	<15><12>	"PARITY ERR"
203	000766	054524	042440	051122				
204	000774	000						
205								
206		000776			.EVEN			
207								

```

200          001000          . =      1000
209
210 001000 000000          ICNT:  0          ;LM = ITERATION COUNT ;RH = TEST NO.
211 001002 000000          ERRORS: 0          ;ERROR COUNT
212 001004 000000 000000 PCNT:  0.0        ;2 WORD PASS COUNT
213 001010 000000          LAD:  0          ;LOOP ADDRESS FOR SCOPE
214 001012 000000          HLTADR: 0          ;ADDRESS OF LAST HLT INSTRUCTION EXECUTED
215 001014 001000          FILCHR: 1000       ;FILCHR=0 (CHAR) ;FILCHR+1=2 (COUNT)
216 001016 177564          TPS:    177564       ;OUTPUT STATUS REGISTER
217 001020 177560          TKS:    177560
218 001022 177562          TKB:    177562
219 001024 177566          TPB:    177566          ;OUTPUT BUFFER
220 001026 177570          SWR:    177570       ;SWITCH REGISTER
221 001030 177570          DISPLAY:177570     ;DISPLAY REGISTER
222
223          ;DISK I/O REGISTERS
224
225 001032 172040          RSCB1: 172040       ;DISK CONTROL + STATUS REGISTER
226 001034 172050          RSCB2: 172050       ;DISK CONTROL + STATUS REGISTER
227 001036 172042          RWC:   172042       ;WORD COUNT REGISTER
228 001040 172044          RBA:   172044       ;BUS ADDRESS
229 001042 172046          RSDA:  172046       ;DISK ADDRESS (DESIRED ADDRESS)
230 001044 172052          RDS:   172052       ;DRIVE STATUS
231 001046 172054          RSR:   172054       ;ERROR REG.
232 001050 172056          RAS:   172056       ;ATTENTION SUMMARY
233 001052 172060          RLA:   172060       ;LOOK AHEAD
234 001054 172062          RDB:   172062       ;DATA BUFFER REGISTER
235 001056 172064          RMR:   172064       ;MAINTENANCE REGISTER
236 001060 172066          RSDT:  172066       ;DRIVE TYPE REGISTER
237 001062 000204          RSVEC: 204         ;INTERUPT RSVEC
238
239          ;BIT ASSIGNMENTS FOR ERROR TYPE OUTS
240
241          000002          DB=2          ;DATA BUFFER
242          000004          DA=4          ;DESIRED ADD
243          000010          WC=10         ;WORD COUNT
244          000020          BA=20         ;BUS ADDRESS
245          000040          DS=40         ;DRIVE STATUS
246          000100          AS=100        ;ATTENTION SUMMARY
247          000204          LA=204        ;LOOK AHEAD
248          000220          MR=220        ;MAINTENANCE
249          000240          DT=240        ;DRIVE TYPE
250
251 001064 000206          STATUS: 206       ;DISK INTERRUPT STATUS
252 001066 000200          PRIORITY:BIT7     ;DISK PRIORITY LEVEL

```

Hi

02

253		000006	RW6	;R/W IN PDR REG
254		000000	UP=0	;UP BITY IN PDR REG
255		000250	MNVEC=250	;ADDR OF MEM MGMT ERROR TRAP
256	001070	000000	STAMEM: 0	;STARTING LOC FOR -A- PORT
257	001072	000000	SAVAST: 0	;SAVE LOC FOP STAMEM
258	001074	000000	STBCOM: 0	;STARTING LOC FOR -B- PORT
259	001076	000000	SAVCPU: 0	;SAVE LOC FOR CPUBM
260	001100	000000	SAVMA: 0	;STARTING ADDR FOR -A- PORT WITH MEM MGMT
261	001102	000000	SAVMB: 0	;STARTING ADDR FOR B PORT N/MEM MGMT
262	001104	000000	SAVMC: 0	;STARTING LOC FOR CPU N/MEM MGMT
263	001106	000000	SIZEAP: 0	;SIZE OF A PORT
264	001110	000000	SIZEBP: 0	;SIZE OF B PORT
265	001112	000000	WDCTB: 0	;WC FOR A PORT
266	001114	000000	AOB1: 0	;FLAG FOR PORT BEING TESTED
267	001116	000000	VADDR: 0	;VIRTUAL ADDR
268	001120	000000	PHADDR: 0	;PHYSICAL ADDR
269	001122	000000	FLAG2: 0	;FLAG FOR RESTART AND FOUND DRIVE
270	001124	000000	DROP: 0	;BAD UNITS ON SYSTEM THAT GET DUMPED

;DISCRIPTION OF FLAG2

271				
272				
273				
274				
275				
276				
277				
278				
279				
280				
281				
282				
283				
284				
285				
286				
287				
288				
289				
290				
291				
292				
293				
294				
295				
296				
297				
298				
299				
300				
301				
302				
303				
304				
305				
306				

;DISCRIPTION OF FLAG

291				
292				
293				
294				
295				
296				
297				
298				
299				
300				
301				
302				
303				
304				
305				
306				

```

307                                     ;RH11 DEDICATE REGISTERS (MEMORY)
308
309 001126 000000 FLAG: 0 ;TEST REGISTER
310 001130 000000 WRDCT: 0 ;WORKING WORD COUNT
311 001132 000000 TRACK: 0 ;WORKING DAE
312 001134 000000 DMA: 0 ;WORKING DAR
313 001136 000000 PATNU: 0 ;DATA PATTERN INDEX
314 001140 000000 BUF: 0 ;WORKING DATA BUFFER (OUT-IN)
315 001142 000000 TDMA: 0 ;TEMP DAR
316 001144 000000 SWRDCT: 0 ;STANDARD WORD COUNT
317 001146 000000 ERCOUNT: 0 ;ERROR COUNT FOR MESSAGES.
318 001150 000000 SAVE: 0
319 001152 000000 HRDR: 0 ;POINTER FOR HARD ERROR
320 001154 000000 BLOCK: 0
321 001156 000000 PASSC: 0
322 001160 000000 UNNUM: 0 ;UNIT CURRENTLY BEING TESTED
323 001162 000000 UNITSV: 0 ;SET BIT=UNIT ON BUS
324 001164 000000 UNCMP: 0 ;FOR COMPARING FOR 0 OF DEVICE
325 001166 000000 RS04DT: 0 ;FLAG FOR R804
326 001170 000000 NUMS: 0 ;WORK LOC FOR NUMBER INPUTS
327 001172 000000 CMD: 0 ;LOC FOR CS2 COMMANDS
328 001174 000000 SWITCH: 0 ;FLAG FOR WHICH RANDOM NUMBER GEN
329 001176 000000 INTPLG: 0 ;FLAG FOR INTERRUPT
330 001200 000000 LOPCNT: 0 ;ERROR FLAG AND LOOP COUNTER FLAG
331 001202 000000 WRITER: 0 ;CONTAINS 0 OF WRITE ERRORS
332 001204 000000 WCERR: 0 ;CONTAINS 0 OF WRITE CHECK ERRORS
333 001206 000000 READER: 0 ;CONTAINS 0 OF READ ERRORS
334 001210 000000 COMERR: 0 ;CONTAINS 0 OF COMPARE ERRORS
335 001212 000000 NMAYA: 0 ;MEM MGMT AVAILABLE INDICATOR
336 001214 000000 SAVWC: 0 ;SAVE LOC FOR CONVERSATION WC ROUTINE
337 001216 000000 FLAG3: 0 ;LOOP IN ADDRESS + RANDOM TST FLAG
338 001220 000000 SAVWC0: 0 ;SAVE WC SIZE FOR -B- PORT
339
340                                     ;RH11 WORK REGISTERS
341                                     ;(CAN BE CHANGED IN ANY ROUTINE)
342 001222 000000 WORK: 0
343 001224 000000 WORK1: 0
344 001226 000000 WORK2: 0

```

345	001230	005037	020116			SETSWI: CLR	SWI		
346	001234	012706	000500			BEGIN: MOV	0500,SP	;SET STACK TO *** 500 ***	
347	001240	012737	016254	000024			MOV	0,POWER,0024	;SET UP PF VECTOR
348	001246	012737	000340	000026			MOV	0340,0026	;LOCK OUT THE WORLD
349	001254	012737	015716	000030			MOV	0,HLT,0030	;SET ENT VECTOR
350	001262	012737	000340	000032			MOV	0340,0032	;LOCK UP
351	001270	012737	016622	000034			MOV	0,TRAP,0034	;SET TRAP VECTOR
352	001276	012737	000340	000036			MOV	0340,0036	;LOCK UP
353	001304	005037	001000				CLR	ICNT	;INIT ICNT
354	001310	005037	001010				CLR	LAD	;INIT LAD
355	001314	032737	000001	020116			BIT	0BIT0,SWI	
356	001322	001001					BNE	20	
357	001324	104444					SUBWR		;SIZE FOR SWITCHLESS
358	001326	042737	177677	001126	20:		BIC	0177677,FLAG	;CLEAR FLAG
359	001334	042737	177776	001122			BIC	0177776,FLAG2	;CLEAR ALL EXECPT RESTART
360	001342	005037	001216				CLR	FLAG3	;CLEAR LOOP IN ADDRESS + RANDOM TST FLAG
361	001346	032737	000001	001122			BIT	0BIT0,FLAG2	;IS THIS THE FIRST TIME?
362	001354	001002					BNE	10	;NO
363	001356	004737	020120				JSR	PC,LDR	;SAVE LOADER
364	001362	000005			10:		RESET		;CLEAR THE WORLD
365	001364	012737	000340	177776			MOV	0340,PS	;LOCK UP INTERRUPT LEVELS
366	001372	004537	012432				JSR	RS,ERRCL	;CLEAR ERROR COUNTER + PASS CNT
367	001376	005037	001212				CLR	MHAVA	;CLEAR MEM MGMT FLAG
368	001402	005037	001114				CLR	A0B1	;TEST A PORT FIRST
369	001406	032777	000004	177412			BIT	0BIT2,0SWR	;WANT MEM MGMT?
370	001414	001021					BNE	30	;NO
371	001416	012737	001444	000004			MOV	050,4	;SET TIMEOUT TRAP
372	001424	012737	000340	000006			MOV	0340,6	;SET PS
373	001432	005037	177572				CLR	00SR0	;IS MEM MGMT AVAILABLE?
374	001436	005137	001212				COM	MHAVA	;YES
375	001442	000401					BR	40	;CONT
376	001444	022626			50:		CMP	(6)+,(6)+	;CLEAR STACK
377	001446	012737	000006	000004	40:		MOV	06,4	;RESET
378	001454	005037	000006				CLR	6	;TRAP
379	001460	032737	000001	001122	30:		BIT	0BIT0,FLAG2	;IS THIS THE FIRST TIME
380	001466	001002					BNE	CALM	;NO
381	001470	000137	020210				JMP	SIZAP	;SIZE BUFFERS
382	001474	004737	011472			CALM:	JSR	PC,00EXTMEM	;SET UP DATA BUFFERS
383	001500	004737	015202			CALM1:	JSR	PC,,MANK	;TURN ON PARITY MEM
384	001504	032737	000001	001122			BIT	0BIT0,FLAG2	;1ST TIME ?
385	001512	001006					BNE	30	;NO
386	001514	013737	001144	001214			MOV	0WRDCT,0AVWC	;SAVE WC FOR CONVERSATION MODE COMPARE
387	001522	013737	001112	001220			MOV	0DCTB,0AVWCB	;SAVE WC FOR -B- PORT
388	001530	052737	000001	001122	30:		BIS	0BIT0,FLAG2	;SET 1ST TIME FLAG
389	001536	005037	001134				CLR	DMA	;CLEAR DAR REGISTERS
390	001542	005037	001136				CLR	PATNU	;CLEAR PATTEN COUNT
391	001546	013737	001144	001130			MOV	0WRDCT,0WRDCT	
392	001554	032777	000002	177244			BIT	0BIT1,0SWR	;DATA TEST ONLY?
393	001562	001403					BEQ	20	;NO
394	001564	052737	002000	001126			BIS	0BIT10,FLAG	;YES
395	001572	032777	002000	177226	20:		BIT	0BIT10,0SWR	;ENTER CONVERSATION MODE?
396	001600	001007					BNE	10	;YES GO TO CONVERSATION MODE
397	001602	052737	074000	001126			BIS	074000,FLAG	
398	001610	004537	010214				JSR	RS,RESTOR	;RESTORE ORIGINAL WD CNT
399	001614	000137	003224				JMP	ADTST	
400	001620	000137	002220		10:		JMP	00CONN	;ENTER CONVERSATION MODE

```

401          ;FIND OUT HOW MANY DRIVES
402          ;FIRST TEST RSAS
403
404 001624 012701 000010          DRVENO: MOV      00.,R1          ;PUT 0 INTO R1 FOR COUNT
405 001630 042737 000002 001122          BIC      0BIT1,FLAG2      ;CLEAR FOUND DRIVE FLG
406 001636 012777 000000 177170          MOV      00,ORSCS2      ;SET DEVICE TO ZERO
407 001644 012777 000007 177174          TRY:    MOV      07,ORSER      ;CAUSE AN ERROR +SETS BIT IN AS REG
408 001652 005301          DEC      R1              ;DO A MAXIMUM OF 16 TIMES
409 001654 001403          BEQ      DVNUM          ;TESTED FOR ALL DRIVES GET OUT
410 001656 005277 177152          INC      ORSCS2          ;INCREMENT DRIVE UNIT
411 001662 000770          BR       TRY            ;REPEAT FOR NEXT DRIVE
412 001664 017737 177160 001162          DVNUM: MOV      ORSAS,UNITSV ;SAVE
413 001672 043737 001124 001162          BIC      DROP,UNITSV     ;DROP BAD DRIVES
414 001700 012737 000401 001164          MOV      0401,UNCMP      ;SETUP TO CMP WITH UNITSV
415 001706 012737 000000 001160          MOV      00,UNNUM        ;PUT 0 INTO UNIT NO.
416 001714 032777 000040 177104          BIT      0BITS,0SWR      ;INHIBIT TYPE OUT?
417 001722 001005          BNE      STTEST         ;YES
418 001724 104402 000730          TYPE    ,TSTNG
419 001730 042737 000004 001122          BIC      0BIT2,FLAG2     ;CLEAR ERROR FLAG
420 001736 033737 001164 001162          STTEST: BIT      UNCMP,UNITSV ;IS THIS DRIVE ON THE SYSTEM
421 001744 001473          BEQ      TRYNX          ;NO
422 001746 013777 001160 177060          UNTP:  MOV      UNNUM,ORSCS2 ;YES PUT UNIT 0 INTO CS2
423 001754 005037 001166          CLR      RS04DT         ;CLEAR DRIVE TYPE FLAG
424 001760 022777 000004 177072          CMP      04,ORSDT       ;RS03LA?
425 001766 001004          BNE      00            ;NO
426 001770 012737 000004 001166          MOV      04,RS04DT      ;SET DRIVE TYPE FLAG
427 001776 000422          BR       10            ;CONT
428 002000 005777 177054          00:    TST      ORSDT     ;IS THIS A RS03?
429 002004 001417          BEQ      10            ;YES
430 002006 022777 000001 177044          20:    CMP      01,ORSDT   ;IS THIS A RS03 4US?
431 002014 001413          BEQ      10            ;YES
432 002016 022777 000002 177034          30:    CMP      02,ORSDT   ;IS THIS A RS04?
433 002024 001404          BEQ      60            ;YES
434 002026 022777 000003 177024          40:    CMP      03,ORSDT   ;RS04?
435 002034 001037          BNE      TRYNX         ;GET A NEW NUMBER
436 002036 052737 177777 001166          60:    BIS      0-1,RS04DT  ;YES RS04
437 002044 032737 040000 001122          10:    BIT      0BIT14,FLAG2 ;IN POWER FAIL OR CONVERSATION?
438 002052 001401          BEQ      70            ;NO
439 002054 000207          RTS      PC            ;YES
440 002056 032777 000200 176760          70:    BIT      0BIT7,ORSDS  ;IS THIS DRIVE READY ?
441 002064 001423          BEQ      TRYNX         ;NO GET ANOTHER DRIVE
442 002066 032777 000040 176732          BIT      0BITS,0SWR     ;TYPEOUT?
443 002074 001016          BNE      40            ;NO
444 002076 032737 000004 001122          BIT      0BIT2,FLAG2    ;WAS THERE AN ERROR?
445 002104 001402          BEQ      50            ;NO
446 002106 104402 000636          TYPE    ,CRLF
447 002112          80:
448 002112 013746 001160          MOV      UNNUM,-(6)     ;PUT UNNUM ON STACK
449 002116 104406          TYPES          ;TYPE STACK IN OCTAL - SUPRESS
450 002120 104402 000040          TYPE    ,40            ;TYPE SPACE
451 002124 042737 000004 001122          BIC      0BIT2,FLAG2    ;CLEAR ERROR FLAG
452 002132 000426          40:    BR       NONGO     ;NOW TEST

```

```

453 002134 006337 001164      TRYX:  ASL      UNCMP      ;CHECK NEXT BIT FOR DRIVE
454 002140 103403              BCS      CHCKDV      ;DID WE TEST ANY REG?
455 002142 005237 001160      INC      UNNUM      ;INC UNIT 0
456 002146 000673              BR       STTEST      ;CHECK FOR NEXT DRIVE
457
458
459 002150 032737 000002 001122      ;THIS PROGRAM WILL DEFAULT TO TESTING UNIT 0 IF IT CAN NOT FIND ANY DRIVES
460 002156 001012      CHCKDV: BIT      @BIT1,FLAG2 ;FOUND DRIVE?
461 002160 012737 100000 001164      BNE      DONEE      ;YES WE DID TEST A DRIVE
462 002166 005037 001160      MOV      @100000,UNCMP ;NO DRIVES TESTED, COULD NOT SET
463 002172 013746 001160      CLR      UNNUM      ;ANY AS BITS, THUS DEFAULTS TO 0
464 002176 104406              MOV      UNNUM,-(6)   ;PUT UNNUM ON STACK
465 002200 000000              TYPES
466                          HALT      ;TYPE STACK IN OCTAL - SUPPRESS
467                          ;COULD NOT SET ANY ATA BITS
468                          ;BY SETTING ERROR BITS
469 002202 000402              BR       NONGO      ;GO BACK AND USE OTHER DIAG.
470 002204 000137 013446      DONEE:  JMP      OUT      ;DEFAULT TO DRIVE 0
471 002210 052737 000002 001122      NONGO:  BIS      @BIT1,FLAG2 ;GET OUT
472                          RTS      PC      ;FOUND DRIVE
473
474                          ;ENTER OPERATOR CONVERSATION MODE
475
476 002220              CONM:
477 002220 104402 007224              TYPE      ,,+2      ;,ASCIZ <15><12>"-A- PORT"
478 002240 004737 003300              JSR      PC,CHPY      ;COMPARE FOR YES
479 002244 001405              BEQ      20          ;YES
480 002246 012737 177777 001114      MOV      @-1,ADD1     ;B PORT
481 002254 000137 002320              JMP      10          ;TEST -B- PORT
482 002260 104402 000653      20:    TYPE      ,STABUF
483 002264 104420              RDOCT
484 002266 012637 001070      NOV      (6)+,STAMEN ;START BUFFER AT 4K
485 002272 104402 000674      30:    TYPE      ,BUFBIZ
486 002276 104420              RDOCT
487 002300 012637 001106      NOV      (6)+,SIZEAP ;GET NUMBER
488 002304 022737 000006 001106      CMP      @6,SIZEAP   ;SAVE IT
489 002312 002767              BLT      30          ;CAN ONLY XFER 24K
490 002314 000137 002362              JMP      NOPORT      ;GREATER THEN 24K
491                          ;GET OUT

```

490	002320	104402	000653		18:	TYPE	,STABUF	
491	002324	104420				RDOCT		;GET ANS
492	002326	012637	001074			MOV	(6)+,STBCOM	;AND SAVE IT
493	002332	104402	000674		48:	TYPE	,BUFSIZ	
494	002336	104420				RDOCT		;GFT ANS
495	002340	012637	001110			MOV	(6)+,SIZEBP	;SAVE IT
496	002344	022737	000006	001110		CMP	06,SIZEBP	;GREATER THEN 24K?
497	002352	002767				BLT	40	;YES ASK AGAIN
498	002354	052737	000100	001126		BIS	0BIT6,FLAG	;SET B PORT FLAG
499	002362	004737	011472		NOPORT:	JSR	PC,EXTMEM	;CAL BUFFERS AND WC
500	002366	013737	001144	001130		MOV	SWRDOCT,WRDCT	;GET STANDARD WC
501	002374	052737	002000	001126	A1:	BIS	0BIT10,FLAG	;SET BIT FOR DATA TEST ONLY
502	002402	004537	012432			JSR	R5,ERRCL	;CLEAR ERROR CNT + PASS CNT
503	002406	042737	174040	001126		BIC	0174040,FLAG	;CLEAR MULTI FLAG MODE +PATTERN SELECT
504	002414	104402	002420			TYPE	,.+2	;ASCIZ <15><12>"MULTI DRIVE"
505	002436	004737	003300			JSR	PC,CMPY	;COMPARE FOR YES
506	002442	001004				BNE	DATTES	;ANS IS NO
507	002444	052737	004000	001126		BIS	0BIT11,FLAG	;SET BIT FOR MULTI DRIVE
508	002452	000434			18:	BR	ASKWC	
509	002454	104402	000510		DATTES:	TYPE	,LOADSW	
510	002460	104420				RDOCT		
511	002462	012637	001170			MOV	(6)+,NUM0	;GET NUMBER
512	002466	022737	000010	001170		CMP	010,NUM0	;CORRECT 0 ?
513	002474	103767				BLO	DATTES	;NO
514	002476	013737	001170	001160		MOV	NUM0,UNNUM	;SET UNIT 0
515	002504	004737	006540			JSR	PC,FNDTYP	;TEST FOR RS04 OR 03
516	002510	005002			18:	CLR	R2	;CLEAR WORK AREA
517	002512	000261				SEC		;SET CARRY
518	002514	006102			28:	ROL	R2	;SET BIT IN WORK
519	002516	005737	001170			TST	NUM0	;IS THIS THE RIGHT BIT FOR THE RIGHT DISK
520	002522	001403				BEQ	30	;YES
521	002524	005337	001170			DEC	NUM0	;NO TRY AGAIN
522	002530	000771				BR	20	;TEST AGAIN
523	002532	010237	001162		38:	MOV	R2,UNITSV	;SET DRIVE BIT IN UNITSV
524	002536	052737	000002	001122		BIS	0BIT1,FLAG2	;SET FOUND DRIVE FLAG
525								
526	002544				ASKWC:	TYPE	,.+2	;ASCIZ <15><12>"OPT WD CT"
527	002544	104402	002550			JSR	PC,CMPY	;COMPARE FOR YES
528	002564	004737	003300			BEQ	WCCON	;YES
529	002570	001403				JSR	R5,RESTOR	;RESTORE ORIGINAL WD CNT
530	002572	004537	010214			JSR	RS,RESTOR	
531	002576	000444				BR	OPDAR	;CONT

569	003020				OPPAT:				
570	003020	104402	003024			TYPE	,,+2		;ASCIZ <15><12>"PATH 0"
571	003036	104420				RDOCT			
572	003040	012637	001170			MOV	(6)+,NUM8		;GET NUMBER
573	003044	022737	000023	001170		CMP	023,NUM8		;TEST FOR CORRECT NO
574	003052	101762				BLOS	OPPAT		;ASK AGAIN
575	003054	005037	001136			CLR	PATNU		;CLEAR PATTERN :
576	003060	022737	000022	001170		CMP	022,NUM8		
577	003066	001411				BEQ	OPWRT		;DATA PATTERN UNDER PROGRAM CONTROL
578	003070	052737	100000	001126		BIS	0BIT15,FLAG		;SET PROGRAM FLAG
579	003076	013737	001170	001136		MOV	NUM8,PATNU		;OPERATOR WANTS TO SELECT DATA
580	003104	000241				CLC			
581	003106	006137	001136			ROL	PATNU		
582									
583	003112				OPWRT:				
584	003112	104402	003116			TYPE	,,+2		;ASCIZ <15><12>"WRITE"
585	003126	004737	003300			JSR	PC,CMPY		;COMPARE FOR YES
586	003132	001003				BNE	OPRD		;ASK ABOUT WRITE CHECK
587	003134	052737	040000	001126		BIS	0BIT14,FLAG		;YES SET FLAG BIT
588									
589	003142				OPRD:				
590	003142	104402	003146			TYPE	,,+2		;ASCIZ <15><12>"READ"
591	003156	004737	003300			JSR	PC,CMPY		;COMPARE FOR YES
592	003162	001003				BNE	OPWCK		
593	003164	052737	010000	001126		BIS	0BIT12,FLAG		;SET FLAG TO READ
594									
595	003172				OPWCK:				
596	003172	104402	003176			TYPE	,,+2		;ASCIZ <15><12>"WRT CK"
597	003210	004737	003300			JSR	PC,CMPY		;COMPARE FOR YES
598	003214	001003				BNE	ADTST		
599	003216	052737	020000	001126		BIS	0BIT13,FLAG		
600									
601	003224	032737	004000	001126	ADTST:	BIT	0BIT11,FLAG		;ARE WE IN MULTI DRIVE MODE
602	003232	001402				BEQ	EXMFLG		;BRANCH IF NO.
603	003234	004737	001624			JSR	PC,DRVENO		;GET DRIVES TO BE TESTED
604	003240	042737	000004	001126	EXMFLG:	BIC	0BIT2,FLAG		;CLEAR XFER MODE FLAG
605	003246	032777	000400	175552		BIT	0BIT0,08WR		;XFER MODE?
606	003254	001403				BEQ	10		;NO
607	003256	052737	000004	001126		BIS	0BIT2,FLAG		;SET XFER MODE FLAG
608	003264	032737	002000	001126	10:	BIT	0BIT10,FLAG		;TEST FOR DATA TEST ONLY
609	003272	001414				BEQ	ADT1		;DO COMPLETE TEST
610	003274	000137	003710			JMP	DATAT		;DO DATA TEST ONLY
611									
612	003300	104402	000641		CMPY:	TYPE	,YORN		
613	003304	104422				RDLIN			
614	003306	122737	000131	017032		CMPB	0'Y,INPUT		;TEST FOR YES
615	003314	000207				RTS	PC		
616	003316	052737	100000	001216	ADTL:	BIS	0BIT15,FLAG3		;SET LOOP IN ADDRESS TEST FLAG GOT HERE
617									;BECAUSE PROGRAM WAS STARTED AT 234

```

618 ;RH11 ADDRESS TEST 01 (TRACK AND SECTOR SELECTION TEST)
619 ;WRITE 100(OCTAL) R803, 200(OCTAL) R804, WORDS IN EACH SECTOR
620 ;THE WORD CONTAINS THE ADDRESS OF EACH SECTOR
621 ;WHEN THE COMPLETE DISK IS WRITTEN READ
622 ;BACK EACH SECTOR AND COMPARE FOR THE CORRECT
623 ;DATA IN THE SECTOR
624 ;PS IS AT LEVEL 7 SO NO INTERRUPTS
625
626 003324 ADT1: ;ADDRESS TEST
627 ;.....
628 ;TEST 1 ADDRESS TEST
629 ;.....
630 003324 104400 TST1: SCOPE
631 003326 032737 000004 001126 ADT1A: BIT 0BIT2,FLAG ;XFER MODE?
632 003334 001402 BEQ 30 ;NO
633 003336 000137 001710 JMP DATAT ;YES
634 003342 012737 000340 177776 30: MOV 0340,PS ;LOCK UP PS
635 003350 012737 020000 017416 MOV 020000,OUTBUF ;START BUF AT 20000
636 003356 052737 000400 001126 BIS 0BIT8,FLAG ;SET TEST FLAG
637 003364 013737 001144 001150 MOV SWRDCT,SAVE ;SAVE STD WD COUNT
638 003372 005037 001134 CLR DMA ;CLEAR DISK ADD
639 003376 104426 CLRDV ;INIT DRIVE
640 003400 004737 006562 JSR PC,WHTHU ;GET WORD COUNT
641 003404 013737 001130 001144 50: MOV WRDCT,SWRDCT
642 003412 013737 017416 001140 20: MOV OUTBUF,BUF ;SET UP CURRENT ADDRESS
643 003420 104414 SEABUF: ERCLR ;CLEAR RS REGISTERS IF ERROR
644 003422 013700 017416 MOV OUTBUF,R0 ;SET UP ADDRESS BUFFER
645 003426 013701 001130 MOV WRDCT,R1 ;
646 003432 013720 001134 XSEABUF:MOV DMA,(0)+ ;LOAD OUTBUF WITH DATA TO BE WRITTEN
647 003436 005301 DEC R1 ;FILL OUTBUF
648 003440 001374 BNE XSEABUF ;WITH DATA
649 003442 012737 000061 001172 MOV 061,CMD ;WRITE NO I/E
650 003450 104416 DKCMD ;GO WRITE
651 003452 105777 175354 TSTB 0RSC81 ;CHECK FOR READY
652 003456 100375 BPL .-4
653 003460 005777 175346 TST 0RSC81 ;TEST FOR ERROR
654 003464 100010 BPL WRNEXB ;BRANCH IF NO ERROR
655 003466 012737 003420 001010 MOV 0SEABUF,LAD ;SET UP LOOP ADDRESS
656 003474 052737 001000 001126 BIS 0BIT9,FLAG ;SET ERROR BIT IN FLAG
657 003502 104430 LOGW ;LOG WRITE ERROR
658 003504 104034 HLT IWCIDAIBA
659 003506 104400 WRNEXB: SCOPE
660 003510 004737 007050 JSR PC,DISBUF ;SET UP NEXT DISK ADDR.
661 003514 007741 BR SEABUF ;WRITE NEXT SECTOR
662 003516 104400 RRDSEC: SCOPE

```

663	003520	104414			RDSECT: ERCLR		;CLEAR ERRORS
664	003522	012737	000071	001172	MOV	071,CMD	;READ NO I/E
665	003530	104416			DKCMD		;DO A READ
666	003532	105777	175274		TSTB	0RSC81	;CHECK FOR READY
667	003536	100375			BPL	.-4	;NOT READY BRANCH BACK
668	003540	005777	175266		TST	0RSC81	;TEST FOR ERROR
669	003544	100006			BPL	ADHGT	;BRANCH IF NO ERROR
670	003546	052737	001000	001126	BIS	0BIT9,FLAG	;SET ERROR FLAG
671	003554	104432			LOGR		;LOG READ ERROR
672	003556	104014			HLT	IMCIDA	
673	003560	104400			SCOPE		
674	003562	013702	017416		ADHGT: MOV	OUTBUF,R2	
675	003566	013746	001130		MOV	WRDCT,-(SP)	;SAVE OLD WC
676	003572	004737	006562		JSR	PC,MHTHU	
677	003576	013703	001130		MOV	WRDCT,R3	
678	003602	012637	001130		MOV	(SP)+,WRDCT	;RESTORE OLD WC
679	003606	023712	001134		SANHT: CMP	DMA,(2)	;CMP FOR CORRECT ADDR.
680	003612	001004			BNE	ADERR	;BRANCH IF DATA DID NOT COMPARE
681	003614	005722			TST	(2)+	;GET NEXT ADDRESS OF INBUF
682	003616	005303			DEC	R3	;DEC SECTOR COUNT
683	003620	001372			BNE	SANHT	;TEST NEXT WORD
684	003622	000412			BR	CHKADT	
685	003624	013701	001134		ADERR: MOV	DMA,GOOD	;CORRECT ADDRESS
686	003630	011200			MOV	(2),BAD	;DATA IN ERROR
687	003632	104000			HLT		;DISK ADD DID NOT MATCH WRITTEN ADDRESS
688	003634	104436			LOGC		;LOG COMPARE ERROR
689	003636	004737	014204		JSR	PC,PRNT	;INHIBIT TYPEOUT?
690	003642	001002			BNE	CHKADT	;YES
691	003644	104402	000636		TYPE	,CRLF	
692							
693							
694							
695	003650	104400			CHKADT: SCOPE		
696	003652	004737	007050		JSR	PC,DISBUF	;SET UP NEXT DISK BUFFER
697	003656	000717			BR	RROSEC	;CHECK NEXT SECTOR
698	003660	013737	001150	001144	MOV	SAVE,SWRDCT	;GET STD WD COUNT
699	003666	042737	000400	001126	BIC	0BIT8,FLAG	;CLEAR TEST FLAG
700	003674	032737	100000	001216	BIT	0BIT15,FLAG3	;DOES OPERATOR WANT TO LOOP ON TEST
701	003702	001402			BEQ	.-6	;NO
702	003704	000137	003326		JMP	ADT1A	;YES

*****REPORT ONLY ONE ERROR PER SECTOR*****

703	003710					DATA1:		;DATA TEST
704								;*****
705						;TEST 2	DATA TEST	
706								;*****
707	003710	104400				TST2:	SCOPE	
708	003712	005037	001134				CLR DMA	;CLEAR DISK ADDRESS
709	003716	104426					CLRDV	;CLEAR RS REGISTERS
710	003720	013737	001144	001130			MOV SWRDCT,WRDCT	
711	003726	032737	000100	001126			BIT #BIT6,FLAG	;MULTI PORT?
712	003734	001403					BEQ 30	;NO
713	003736	005737	001114				TST A0B1	;A OR B PORT?
714	003742	001003					BNE 10	;B PORT
715	003744	004737	011350		30:		JSR PC,APORT	;A PORT
716	003750	000402					BP 20	
717	003752	004737	011416		10:		JSR PC,BPORT	;B PORT
718	003756	004737	006774		20:		JSR PC,VECTRR	;SETUP INT VECTOR
719	003762	012777	000340	175074			MOV #340,#STATUS	;SET DISK STATUS REG LOC (206)
720	003770	012737	004022	001152			MOV #LDAT,WRDER	;SETUP FOR HARD ERROR RETURN
721	003776	013737	017416	001140			MOV OUTBUF,BUF	;SETUP OUTPUT BUFFER
722	004004	052737	000003	001126			BIS #3,FLAG	;SET COUNTER TO 3
723	004012	004537	007716				JSR RS,PASEL	;SET UP DATA BUFFERS
724	004016	005037	001200			LDAT1:	CLR LOPCNT	;CLEAR ERROR FLAG
725	004022	104414				LDAT:	ERCLR	;CLEAR RS REG. IF ERROR
726	004024	004537	006500				JSR RS,OPDSEL	;SET UP DISK ADDRESS
727	004030	032737	040000	001126			BIT #BIT14,FLAG	;TEST FOR WRITE
728	004036	001456					BEQ 8LH	;TEST FOR READ
729	004040	012737	000161	001172			MOV #161,CMD	;WRITE WITH I/E
730	004046	104416					DKCHD	;DO A WRITE
731	004050	004737	011750				JSR PC,WAIT	;WAIT FOR INTERRUPT
732	004054	012737	004022	001010			MOV #LDAT,LAD	;SETUP SCOPE LOOP
733	004062	032737	001000	001126			BIT #BIT9,FLAG	;WAS THERE AN ERROR?
734	004070	001423					BEQ WRXBL	;CONT
735	004072	104430					LOGW	;LOG WRITE ERROR
736	004074	005237	001200				INC LOPCNT	;SET ERROR FLAG
737	004100	004737	014204		20:		JSR PC,PRNT	;TYPE ?
738	004104	001004					BNE 10	;NO
739	004106	104402	000554				TYPE ,DATA	
740	004112	104402	000564				TYPE ,WRERR	
741	004116	104044			10:		HLT #DSIDA	;WRITE ERROR
742	004120	005337	001126				DEC FLAG	;DEC COUNTER
743	004124	032737	000003	001126			BIT #3,FLAG	;DONE YET WITH 3RD TRY?
744	004132	001333					BNE LDAT	;NOT 3 TRIES YET? TRY AGAIN
745	004134	004737	011454				JSR PC,WTHO	;TYPE CAN NOT WRITE

746	004.40	005737	001200		MRXBL:	TST	LOPCNT		;WAS THERE AN ERROR?
747	004144	001402				BEQ	MRX1		;NO
748	004146	004737	011772			JSR	PC,TYPREC		;TYPE RECOVERED
749	004152	005037	001200		MRX1:	CLR	LOPCNT		;CLEAR ERROR FLAG
750	004156	104400				SCOPE			
751	004160	052737	000003	001126		BIS	#3,FLAG		;CLEAR RETRY COUNT
752	004166	004737	007050			JSR	PC,DISBUF		;SET BUFFER FOR WRITE CHECK
753	004172	000711				BR	LDATE		
754	004174	104400			SLH:	SCOPE			
755	004176	104414			SLH2:	ERCLR			;CLEAR PS REG IF ERRORS
756	004200	004537	006500			JSR	R5,OPDSEL		;IS THE OPERATOR SELECTING THE TRACK
757	004204	032737	020000	001126		BIT	#BIT13,FLAG		;TEST FOR WRITE CHECK
758	004212	001002				BNE	10		;YES
759	004214	000137	004520			JMP	ESH1		;NO
760	004220	013737	017416	001140	10:	MOV	OUTBUF,BUF		;SET UP CURRENT ADDRESS
761	004226	012737	000181	001172		MOV	#191,CMD		;WRITE CHECKWITH I/E
762	004234	104416				DKCMD			;GO WRITE CHECK
763	004236	004737	011750			JSR	PC,WATT		;WAIT FOR INTERRUPT
764	004242	032737	001000	001126	XESH:	BIT	#BIT9,FLAG		;IS THERE AN ERROR?
765	004250	001505				BEQ	10		;NO ERROR
766	004252	005737	001200			TST	LOPCNT		;1ST ERROR?
767	004256	001001				BNE	20		;NO
768	004260	104434				LOGWC			;YES LOG ERROR
769	004262	032777	000100	174536	20:	BIT	#BIT6,08WR		;TYPE ALL ERRORS?
770	004270	001007				BNE	30		;YES
771	004272	032777	001000	174526		BIT	#BIT9,08WR		;LOOP ON ERROR?
772	004300	001003				BNE	30		;YES
773	004302	005737	001200			TST	LOPCNT		;FIRST ERROR?
774	004306	001056				BNE	100		;NO
775	004310	004737	014204		30:	JSR	PC,PRNT		;TYPE OUT?
776	004314	001052				BNE	40		;NO
777	004316	104402	000554			TYPE	,DATA		
778	004322	104402	000574			TYPE	,MCKERR		
779	004326	017702	174506			MOV	#R5BA,R2		;GET CORRECT BA
780	004332	023702	017416			CMF	OUTBUF,R2		;DID A WD GET XFERED?
781	004336	001406				BEQ	90		;NO
782	004340	032777	000400	174460		BIT	#BIT0,08WR		;XFER MODE?
783	004346	001002				BNE	90		;YES
784	004350	162702	000002			SUB	#2,R2		
785	004354	004737	014204		90:	JSR	PC,PRNT		;TYPEOUT ERRORS?
786	004360	001030				BNE	40		;NO
787	004362	005737	001212			TST	MMAVA		;IS MEN MGMT AVAILABLE?
788	004366	001402				BEQ	70		;NO

789	004370	004737	006626			JSR	PC,PHYCOV	;YES GET VITURAL ADDR
790	004374	010237	001222		78:	MOV	R2,WOPK	;GET BA
791	004400				88:			
792	004400	104402	004404			TYPE	,,+2	;.ASCIZ <15><12>="(BA)@"
793	004414				68:			
794	004414	017746	174602			MOV	0WOPK,-(6)	;PUT 0WOPK ON STACK
795	004420	104404				TYPE0		;TYPE STACK IN OCTAL
796	004422	104402	004426			TYPE	,,+2	;.ASCIZ " MC@"
797	004434	017746	174376			MOV	0RSWC,-(6)	;PUT 0RSWC ON STACK
798	004440	104404				TYPE0		;TYPE STACK IN OCTAL
799	004442	104026			48:	HLT	DA DB BA	;NOTE: BA REG. = +2 OF ACTUAL MEMORY ;LOC AFTER WORDS HAVE BEEN XFERED
800								
801	004444	005237	001200		100:	INC	LOPCNT	;INC ERROR COUNT
802	004450	022737	000010	001200		CMP	010,LOPCNT	;10 TRYS YET?
803	004456	001247				BNE	0LH2	;NO
804	004460	004737	006520			JSR	PC,NOREC	;TYPE UNRECOVERABLE
805	004464	005737	001200		10:	TST	LOPCNT	;ANY ERRORS?
806	004470	001402				BEO	50	;NO
807	004472	004737	011772			JSR	PC,TYPREC	;TYPE RECOVERED
808	004476	005037	001200		50:	CLR	LOPCNT	;CLEAR ERROR COUNTER
809	004502	104400				SCOPE		
810	004504	012737	004176	001010		MOV	0LH2,LAD	;SETUP LOOP ADDRESS
811	004512	004737	007050			JSR	PC,DISBUF	;SET UP THE DISK BUFFER
812	004516	000422				BR	0LH2A	
813	004520	004537	011302		ESH1:	JSR	R5,CLEAR	;CLEAR BUFFER
814	004524	004537	006500		ESH:	JSR	R5,OPDSEL	;OPERATOR SELECTED DISK ADDRESS?
815	004530	032737	010000	001126		BIT	0BIT12,FLAG	;TEST FOR READ
816	004536	001002				BNE	10	;YES
817	004540	000137	004754			JMP	0STR	;NO READ
818	004544	104400			10:	SCOPE		
819	004546	042737	000003	001126		BIC	03,FLAG	;CLEAR RE-READ COUNT
820	004554	005037	001200			CLR	LOPCNT	;CLEAR FLAG
821	004560	000137	004570			JMP	0SKRD	;CONT
822	004564	000137	004176		0LH2A:	JMP	0LH2	
823	004570	104414			0SKRD:	ERCLR		;CLEAR R5 REG IF ERRORS
824	004572	012737	000171	001172		MOV	0171,CMD	;READ WITH I/E
825	004600	104416				DKCMD		;READ
826	004602	032777	010000	174216		BIT	010000,0SWR	;COMPARE?
827	004610	001007				BNE	TAG	;NO
828	004612	032737	000004	001126		BIT	0BIT2,FLAG	;COMPARE?
829	004620	001003				BNE	TAG	;NO
830	004622	004537	010446			JSR	R5,COMPARE	;COMPARE
831	004626	000402				BR	ELH	


```

075 005056
076
077
078
079
080
081
082 005056 104400
083 005060 032737 000004 001126
084 005066 001402
085 005070 000137 006066
086 005074 052737 000400 001126 28:
087 005102 012737 020000 017416
088 005110 013737 017416 001116
089 005116 005737 001212
090 005122 001402
091 005124 005037 177572
092 005130 012737 000042 001136 10:
093 005136 104426
094 005140 012737 176030 001156
095 005146 012737 005706 001152
096 005154 004737 006774
097 005160 012777 000340 173676
098 005166 012737 005270 001010 WRLG1:
099 005174 012737 000001 001222
100 005202 013701 017416
101 005206 004537 010040
102 005212 017737 012200 001134
103 005220 042737 170000 001134
104 005226 052737 000003 001126
105 005234 004737 006562
106 005240 013737 001130 001222 28:
107 005246 013701 017416
108 005252 004537 010040
109 005256 013737 017416 001140
110 005264 005037 001200

```

```

RANEX:
;RANDOM ADDRESS DATA TEST
;THIS PROGRAM WRITES, WRITECHECKS AND READS 1 SECTOR OF RANDOM DATA FROM RANDOM DISK
;ADDRESSES. THIS TEST WILL MAKE 1000(10) PASSES BEFORE IT IS COMPLETED

;.....
;TEST 3 RANDOM ADDRESS RANDOM DATA TEST
;.....
TST3: SCOPE
BIT 0BIT2,FLAG ;FAST XFER MODE?
BEQ 28 ;NO
JMP EXTDDR ;CT OUT
BIS 0BIT0,FLAG ;SET TEST FLAG
MOV 020000,OUTBUF ;GET STARTING ADDR OF BUF
MOV OUTBUF,VADDR ;SAVE BUFFER ADDR
TST MMVA ;MEM MGMT AVAILABLE?
BEQ 18 ;NO
CLR 00SR0 ;TURN IT OFF
MOV 042,PATNU ;DO RANDOM COMPARE
CLRDV ;INIT DRIVE
MOV 0-1000,,PASSC ;SET UP PASS COUNT
MOV 0WRRED,HRDER ;SET UP FOR HARD ERROR
JSR PC,VECTR ;SETUP INTERRUPT VECTOR
MOV 0340,0STATUS
WRLG1: MOV 0WRERR,LAD ;SETUP LOOP ADDRESS
MOV 01,WORK ;SET UP RANDOM GENERATOR WORD
MOV OUTBUF,R1
JSR RS,RANDOM ;GENERATE RANDOM DATA
MOV 0OUTBUF,DMA ;SET UP DISK ADDRESS
BIC 0170000,DMA
BIS 03,FLAG ;SET COUNTER
JSR PC,MNTHU ;GET WORD COUNT
MOV WRDCT,WORK ;GENERATE RANDOM BUFFER
MOV OUTBUF,R1
JSR RS,RANDOM
MOV OUTBUF,BUF ;SET UP OUTPUT BUFFER
CLR LOPCNT ;CLR ERROR FLAG

```

911	005270	104414			WPERR:	ERCLR		
912	005272	012737	000161	001172		MOV	0161,CMD	;WRITE WITH I/E
913	005300	104416				DKCMD		;WRITE
914	005302	004737	011750			JSR	PC,WATT	;WAIT FOR INTERRUPT
915	005306	032737	001000	001126	20:	BIT	0BIT9,FLAG	;WAS THERE AN ERROR?
916	005314	001435				BEQ	WRRCK1	;NO
917	005316	032777	000100	173502		BIT	0BIT6,0SWR	;TYPE RETRY ?
918	005324	001003				BNE	50	;YES
919	005326	005737	001200			TST	LOPCNT	;FIRST TIME?
920	005332	001013				BNE	60	;NO
921	005334	104430			50:	LOGW		;LOG WRITE ERROR
922	005336	005237	001200			INC	LOPCNT	;SET ERROR FLAG
923	005342	004737	014204			JSR	PC,PRNT	;TYPEOUT?
924	005346	001004				BNE	30	;YES
925	005350	104402	000716			TYPE	,RANDM	
926	005354	104402	000564			TYPE	,WRTERR	
927	005360	104044			30:	HLT	10SIDA	
928	005362	104400			60:	SCOPE		
929	005364	005337	001126			DEC	FLAG	
930	005370	032737	000003	001126		BIT	03,FLAG	
931	005376	001334				BNE	WRERR	;RETRY
932	005400	004737	011434			JSR	PC,WTMO	;TYPE CAN NOT WRITE
933	005404	000137	006010			JMP	EXRAX	;GET NEW NUMBER

934	005410	005737	001200			WRRCK1: TST	LOPCNT	;ANY ERRORS?
935	005414	001402				BEQ	18	;NO
936	005416	004737	011772			JSR	PC,TYPE	;TYPE RECOVERED
937	005422	104400			18:	SCOPE		
938	005424	005037	001200			CLR	LOPCNT	;CLEAR LOOP COUNT
939	005430	104414				WRRCK1: ERCLR		;CLEAR R8 REG IF ERRORS
940	005432	012737	000151	001172		MOV	#151,CMD	;WRITE CHECK WITH I/E
941	005440	104416				DKCMD		;WRITE CHECK
942	005442	004737	011750			JSR	PC,WATT	;WAIT FOR INTERRUPT
943	005446	032737	001000	001126	48:	BIT	#BIT9,FLAG	;ERROR?
944	005454	001453				BEQ	18	;NO
945	005456	032777	000100	173342		BIT	#BIT6,08WP	;TYPE ALL RETRY?
946	005464	001003				BNE	20	;YES
947	005466	005737	001200			TST	LOPCNT	;FIRST ERROR?
948	005472	001030				BNE	50	;NO
949	005474	104434			28:	LOGWC		;LOG WRITE CK
950	005476	004737	014204			JSR	PC,PRNT	;TYPEOUT?
951	005502	001052				BNE	60	;NO
952	005504	104402	000716			TYPE	,RANDM	
953	005510	104402	000574			TYPE	,WCKERR	
954	005514	017737	173320	001222		MOV	0R8BA,WORK	;GET CORRECT BA
955	005522	162737	000002	001222		SUB	02,WORK	
956	005530	104402	005534			TYPE	,.+2	;,ABCIZ <15><12>*(BA)0"
957	005544	017746	173452			MOV	0WORK,-(6)	;PUT 0WORK ON STACK
958	005550	104404				TYPEO		;TYPE STACK IN OCTAL
959	005552	104026				HLT	10BIDA BA	;BAMEMORY LOC +2 OF ACTUAL WORD
960	005554	005237	001200		58:	INC	LOPCNT	;INC RETRY COUNT
961	005560	022737	000010	001200		CMF	010,LOPCNT	;LAST ONE YET?
962	005566	001320				BNE	WRRCK	;NO
963	005570	104402	000522			TYPE	,UNRECO	
964	005574	005037	001200			CLR	LOPCNT	;CLEAR LOPCNT
965	005600	000137	006010			JMP	EXRAX	;GET NLZ NUMBER
966	005604	005737	001200		18:	TST	LOPCNT	;ANY ERRORS?
967	005610	001407				BEQ	60	;NO
968	005612	104402	000616			TYPE	,RECOV	
969	005616	013746	001200			MOV	LOPCNT,-(6)	;GET NUMBER
970	005622	104406				TYPE8		;TYPE IT
971	005624	104402	000636			TYPE	,CRLPLF	
972	005630	104400			68:	SCOPE		
973	005632	052737	000003	001126		BIS	03,FLAG	;SET COUNTER


```

1016 ;CHECK FOR MULTI DISK MODE
1017 ;IF IN MULTI DISK MODE REPORT "END"
1018 ;IF LAST DISK ON SYSTEM HAS BEEN EXERCISED.
1019
1020 ;*****
1021 ;TEST 4 TEST FOR MULTI DISK MODE
1022 ;*****
1023 006064 104400 TBT4: SCOPE
1024 006066 005037 001134 EXTPPR: CLR DMA
1025 006072 104426 CLRDV ;INIT DRIVE
1026 006074 032737 004000 001126 BIT 0BIT11,FLAG ;ARE WE IN MULTI DISK MODE
1027 006102 001404 BEQ EXTPP ;NO REPORT "END"
1028 006104 004737 002134 JSR PC,TRYNX ;YES TEST FOR ALL DRIVES
1029 006110 000137 003240 JMP EXMPLG ;RESTART TESTING OF DRIVES
1030 006114 004737 002204 EXTPP: JSR PC,DONEE ;GET PASS COUNT
1031
1032 ;THIS ROUTINE CLEARS THE DRIVE
1033 ;REGISTERS IF THERE WAS AN ERROR
1034
1035 006120 032737 001000 001126 .ERCLR: BIT 0BIT9,FLAG ;ANY ERRORS?
1036 006126 001404 BEQ 10 ;NO
1037 006130 104426 CLRDV ;CLEAR ALL ERRORS
1038 006132 042737 001000 001126 BIC 0BIT9,FLAG ;CLEAR ERROR FLAG
1039 006140 000002 10: RTI ;EXIT
1040
1041 ;ENTER DISK HANDLER BY THE TRAP INSTRUCTION
1042 ;ARGUMENT TO TRAP INSTRUCTION IS TWO ORDER
1043 ;BYTE OF THE CONTROL REGISTER.
1044
1045 006142 013777 001134 172672 .DKCMD: MOV DMA,0RSDA ;LOAD DISK ADD
1046 006150 005037 001176 CLR INTPLG ;CLEAR INTERRUPT FLAG
1047 006154 032737 020000 001122 BIT 0BIT13,FLAG2 ;IN MAPPING ROUTINE?
1048 006162 001021 BNE 40 ;YES
1049 006164 032737 000004 001126 BIT 0BIT2,FLAG ;MAX DATA TEST?
1050 006172 001415 BEQ 40 ;NO
1051 006174 022737 000042 001136 CMP 042,PATNU ;RANDOM DATA?
1052 006202 001411 BEQ 40 ;YES
1053 006207 052777 000010 172622 BIS 010,0RSC62 ;SET BAI
1054 006212 005077 172620 CLR 0R2WC ;64K XPER
1055 006216 012777 017416 172614 MOV 0OUTBUF,0RSBA ;SETUP BA
1056 006224 000435 BR 20 ;CONT
1057 006226 013777 001140 172604 40: MOV DUP,0RSBA ;LOAD (CMA) BUSS ADDRESS
1058 006234 013702 001130 MOV WRDCT,R2 ;SET NEGATIVE
1059 006240 005402 NEG R2 ;WORD COUNT
1060 006242 010277 172570 MOV R2,0RSWC ;LOAD WC
1061 006246 032737 000400 001126 BIT 0BIT0,FLAG ;RANDOM TEST?
1062 006254 001033 BNE 10 ;YES A PORT ONLY WITH NO MEM MGMT
1063 006256 005737 001212 TST MNAVA ;MEM MGMT AVAILIABLE?
1064 006262 001416 BEQ 20 ;NO
1065 006264 032737 000040 001122 BIT 0BIT5,FLAG2 ;SET A17 IN RSC61
1066 006272 001403 BEQ 30 ;NO
1067 006274 052737 001000 001172 BIS 0BIT9,CMD ;YES

```

```

1068 006302 032737 000020 001122 30: BIT 0BIT4,FLAG2 ;SET A16?
1069 006310 001403 BEQ 28 ;NO
1070 006312 052737 000400 001172 BIS 0BIT0,CMD ;YES
1071 006320 032737 000100 001126 20: BIT 0BIT6,FLAG ;MULTI PORT?
1072 006326 001406 BEQ 18 ;NO
1073 006330 005737 001114 TST A0B1 ;TEST A OR B PORT?
1074 006334 001403 BEQ 18 ;A PORT
1075 006336 052737 002000 001172 BIS 0BIT10,CMD ;B PORT
1076 006344 013777 001172 172460 10: MOV CMD,0RSCB1 ;LOAD FUNCTION REG.
1077 006352 000002 RTI ;RETURN FROM TRAP
1078
1079 ;RH11 DISK INTERRUPT HANDLER
1080 ;ROUTINE CONTINUES ON ERRORS
1081
1082 006354 042737 001000 001126 DKINT: BIC 0BIT9,FLAG ;CLEAR ERROR BIT
1083 006362 005777 172444 TST 0RSCB1 ;TEST FOR ERROR
1084 006366 100401 BMI 28
1085 006370 000425 BR INTEXT ;JUMP IF NO ERRORS
1086 006372 017702 172434 20: MOV 0RSCB1,R2 ;GET CONTENTS OF CB1
1087 006376 042702 037777 BIC 037777,R2 ;CLEAR ALL BUT SC AND TRE
1088 006402 022702 140000 CMP 0140000,R2 ;IS SC AND TRE BOTH SET?
1089 006406 001413 BEQ TRUERR ;YES THERE IS SOME KIND OF XFER ERROR
1090 006410 032777 100000 172426 BIT 0100000,0RSCB ;IS THE ATA BIT SET?
1091 006416 001007 BNE TRUERR ;YES
1092 006420 104140 HLT ;ASIDE ;WRONG UNIT INTERRUPTED
1093 ;IF YOU HAVE JUST POWERED UP A DRIVE OR
1094 ;ARE RUNNING THE POWER FAIL TEST,
1095 ;INTERRUPTS WILL OCCUR FROM DRIVES OTHER
1096 ;THAN THE UNIT UNDER TEST. IF THIS TIMEOUT
1097 ;SHOWS NO ERRORS IN THE REGISTERS OF THE DRIVE
1098 ;UNDER TEST, THAT DRIVE IS OK
1099 006422 012777 177777 172420 10: MOV 0-1,0RSCB ;CLEAR ALL ATA BITS
1100 006430 013716 001152 MOV 0RDR,0SP ;GET RETURN ADD.
1101 006434 000002 RTI ;RETRY
1102 006436 052737 001000 001126 TRUERR: BIS 0BIT9,FLAG ;SET ERROR BIT
1103 006444 032777 004000 172354 INTEXT: BIT 0BIT11,0SNR ;HALT ON COMPLETION FLAG
1104 006452 001401 BEQ .+4
1105 006454 000000 HALT ;YES BIT 11 SET IN SNR HALT
1106 006456 032737 002000 001122 BIT 0BIT10,FLAG2 ;WAIT IN BACKGROUND TEST?
1107 006464 001402 BEQ 18 ;NO
1108 006466 012716 012416 20: MOV 0SNRRET,0SP ;MODIFY RETURN ADD.
1109 006472 010637 001176 10: MOV 0SP,INTFLG ;SET INT FLG
1110 006476 000002 RTI ;EXIT
1111
1112 ;ROUTINE TO SET UP TRACK # FROM OPTION
1113 ;ENTER FROM JSR RS, OPDSEL
1114
1115 006500 032737 000040 001126 OPDSEL: BIT 0BITS,FLAG ;OPTIONAL DMA?
1116 006506 001403 BEQ 18 ;NO
1117 006510 013737 001142 001134 MOV TDMA,DMA ;GET OPT. DMA
1118 006516 000205 10: RTS RS ;EXIT

```

```

1119
1120
1121          .ZVEN
1122
1123 006520 004737 014204      NOREC: JSR      PC,PRNT      ;TYPEOUT?
1124 006524 001002              BNE      10          ;NO

1125 006526 104402 000522              TYPE     ,UNRECO
1126 006532 005037 001200      10:     CLR     LOPCNT      ;CLEAR LOOP COUNTER
1127 006536 000207              RTS     PC

1128
1129 006540 052737 040000 001122  FNDTYP: BIC     @BIT14,FLAG2 ;SET CHECK DRIVE TYPE FLAG
1130 006546 004737 001746              JSR     PC,UNTYP      ;CHECK DRIVE TYPE FLAG
1131 006552 042737 040000 001122              BIC     @BIT14,FLAG2 ;CLEAR DRIVE TYPE FLAG
1132 006560 000207              RTS     PC
1133 006562 022737 000004 001166  WHTHU: CMP     @4,RS04DT ;RS03LA?
1134 006570 001004              BNE     10          ;NO
1135 006572 012737 000040 001130              MOV     @40,WRDCT    ;GET WORD COUNT
1136 006600 000411              BR      20
1137 006602 012737 000200 001130  10:     MOV     @200,WRDCT ;RS04
1138 006610 005737 001166              TST     RS04DT      ;RS04?
1139 006614 001003              BNE     20          ;YES
1140 006616 012737 000100 001130              MOV     @100,WRDCT  ;NO
1141 006624 000207      20:     RTS     PC
1142
1143

```

```

1144          ;ROUTINE TO CALCULATE VITURAL ADDR
1145
1146 006626 000302          PHYCOV: SWAB      R2          ;CALCULATE FROM PHYSICAL ADDR
1147 006630 004737 011736      JSR      PC,PRR2
1148 006634 006002          ROR      R2
1149 006636 042702 177770      BIC      0177770,R2      ;GET REG 0
1150 006642 032777 000400 172162  BIT      0BIT0,0RSCB1    ;IS A16 SET?
1151 006650 001402          BEQ      10              ;NO
1152 006652 052702 000010      BIS      0BIT3,R2        ;YES
1153 006656 032777 001000 172146 10:  BIT      0BIT9,0RSCB1    ;IS A17 SET?
1154 006664 001402          BEQ      20              ;NO
1155 006666 052702 000020      BIS      0BIT4,R2        ;YES
1156 006672 013737 001070 001224 20:  MOV      STANEM,WORK1     ;GET BANK 0 FOR -A- PORT
1157 006700 005737 001114      TST     ADB1             ;ARE WE ON -A- PORT?
1158 006704 001403          BEQ      30              ;YES
1159 006706 013737 001074 001224      MOV      STBCOM,WORK1    ;NO -B- PORT
1160 006714 163702 001224 30:  SUB      WORK1,R2        ;GET STARTING BANK 0
1161 006720 062702 000001      ADD     01,R2           ;GET OFFSET FOR REG 0
1162 006724 000302          SWAB     R2              ;GET BANK 0 INTO
1163 006726 006102          ROL     R2              ;UPPER BITS
1164 006730 006102          ROL     R2
1165 006732 006102          ROL     R2
1166 006734 006102          ROL     R2
1167 006736 006102          ROL     R2
1168 006740 017737 172074 001224      MOV      0RSCB,WORK1     ;GET OFFSET FOR ADDR IF ANY
1169 006746 162737 000002 001224      SUB     02,WORK1         ;CORRECT IT
1170 006754 042737 160000 001224      BIC     0160000,WORK1    ;CLEAR JUNK
1171 006762 050237 001224          BIS     R2,WORK1        ;GET REG NO
1172 006766 013702 001224          MOV     WORK1,R2
1173 006772 000207          RTS     PC
1174
1175 006774 012777 006354 172060  VECTRR: MOV     0DKINT,0RSEV     ;SETUP INTERRUPT VECTORS
1176 007002 013737 001066 177776      MOV     PRIORITY,PS     ;PRIORITY 4
1177 007010 000207          RTS     PC
1178
1179          ;THIS ROUTINE IS USED FOR DELAYING THE START OF THIS PROGRAM
1180          ;IF POWER FAILED DURING TESTING, THIS WILL GIVE THE DRIVES TIME TO GET UP
1181          ;TO SPEED, THE DELAY WILL BE ABOUT 3-5 MINUTES DEPENDING UPON THE PROCESSOR
1182
1183 007012 012737 000677 001222  TIMUP: MOV     0677,WORK
1184 007020 012737 177777 001224 10:  MOV     0177777,WORK1
1185 007026 000240          NOP
1186 007030 005337 001224          DEC     WORK1
1187 007034 001374          BNE     20
1188 007036 005337 001222          DEC     WORK1
1189 007042 001366          BNE     10
1190 007044 000137 003224          JMP     ADTST

```

```

1191          ;ROUTINE TO SETUP DISK BUFFERS
1192          ;ADD WORD COUNT TO STARTING DISK ADDRESSES
1193          ;COMPARE CALCULATED ADDRESS TO TERMINATING ADDRESS
1194
1195 007050 032737 000040 001126 DISBUF: BIT      0BITS,FLAG      ;DID OPERATOR SELECT PATTERNS
1196 007056 001402                BEQ      28                ;NO

1197 007060 000137 007342                JMP      BUFXIT          ;YES
1198 007064 022737 000042 001136 28:    CMP      042,PATNU      ;RANDOM PATTERN?
1199 007072 001443                BEQ      10                ;YES
1200 007074 032737 000004 001126        BIT      0BIT2,FLAG     ;MAX TST?
1201 007102 001437                BEQ      10                ;NO
1202 007104 022737 000004 001166        CMP      04,R804DT     ;R803LA?
1203 007112 001010                BNE      40                ;NO
1204 007114 022737 004000 001134        CMP      04000,DMA     ;DONE YET?
1205 007122 001507                BEQ      BUFXIT          ;YES
1206 007124 062737 004000 001134        ADD      04000,DMA     ;UPDATE DMA
1207 007132 000207                RTS      PC
1208 007134 005737 001166                40:    TST      R804DT      ;R804?
1209 007140 001010                BNE      30                ;YES
1210 007142 022737 006000 001134        CMP      06000,DMA     ;R803
1211 007150 001474                BEQ      BUFXIT          ;DONE GET OUT
1212 007152 062737 002000 001134        ADD      02000,DMA     ;UPDATE DMA
1213 007160 000207                RTS      PC
1214 007162 022737 007000 001134 30:    CMP      07000,DMA     ;DONE YET?
1215 007170 001464                BEQ      BUFXIT          ;YES
1216 007172 062737 001000 001134        ADD      01000,DMA     ;UPDATE ADDR
1217 007200 000207                RTS      PC
1218 007202 004737 007556                10:    JSR      PC,BLSE     ;DEFINE BLOCK SIZE
1219 007206 013737 001154 001224        MOV      BLOCK,WORK1
1220 007214 005237 001134 INCSEC: INC      DMA      ;+1 SECTOR COUNT
1221 007220 022737 010000 001134        CMP      010000,DMA    ;DONE YET?
1222 007226 001448                BEQ      BUFXIT          ;YES
1223 007230 005337 001154                DEC      BLOCK          ;-1 FROM BLOCK COUNT
1224 007234 001401                BEQ      CONDAR         ;CMP DMA TO RSDA
1225 007236 000766                BR       INCSEC         ;RECYCLE
1226 007240 032737 001000 001126 CONDAR: BIT      0BIT9,FLAG     ;ANY ERRORS?
1227 007246 001401                BEQ      10                ;NO ERRORS DO COMPARE ON RSDA
1228 007250 000207                RTS      PC              ;ERRORS DO NOT COMPARE RSDA
1229 007252 023777 001134 171562 10:    CMP      DMA,0RSDA     ;COMPARE RSDA WITH DMA
1230 007260 001425                BEQ      CMDAE           ;SHOULD BE EQUAL
1231 007262 104432                LOGR                    ;AFTER TRANSFER RSDA AND DMA SHOULD BE =
1232                                ;IF NOT, RSDA IS NOT CORRECT, DMA CONTAINS
1233                                ;WHAT RSDA SHOULD =
1234 007264 013701 001134                MOV      DMA,GOOD       ;GET DMA FOR CORRECT ANS IN GOOD
1235 007270 017700 171546                MOV      0RSDA,BAD      ;GET RSDA INTO BAD
1236 007274 104000                HLT
1237 007276 004737 014204                JSR      PC,PRNT        ;RSDA=BAD DMA=GOOD SEE COMMENTS 7 LINES ABOVE
1238 007302 001014                BNE      CMDAE           ;TYPEOUT?
1239 007304 011637 001222                MOV      (SP),WORK      ;NO
1240 007310 104402 007314                TYPE      ,,+2          ;GET TEST PC FROM WHERE IT CAME
1241 007326 013746 001222                MOV      WORK,-(6)      ;,ASCIZ "TST PC"
1242 007332 104406                TYPES                    ;PUT WORK ON STACK
1243 007334 105737 001126 CMDAE: TSTB    FLAG      ;TYPE STACK IN OCTAL - SUPRESS
1244 007340 100032                BPL      BUFINX         ;LAST DISK BUFFER?
                                ;NO

```

1245	007342	005037	001134		BUFEXIT: CLR	DMA	;CLEAR ADDRESS BITS LAST DISK BUFFER
1246	007346	062716	000002		ADD	02,(6)	;INC STACK POINTER
1247	007352	042737	000200	001126	AKH: BIC	0200,FLAG	;CLEAR LAST DISK BUFFER FLAG
1248	007360	032737	000400	001126	BIT	0BIT0,FLAG	;RANDOM TEST OR ADDR TEST?
1249	007366	001404			BEQ	10	;NO
1250	007370	013737	001144	001130	20: MOV	0WRDCT,WRDCT	
1251	007376	000466			BR	EXTDR	;EXIT
1252	007400	032737	000100	001126	10: BIT	0BIT6,FLAG	;MULTI PORT?
1253	007406	001770			BEQ	20	;NO
1254	007410	005737	001114		TST	00B1	;A OR B PORT?
1255	007414	001765			BEQ	20	;A PORT
1256	007416	013737	001112	001130	MOV	0DCT0,WRDCT	;B PORT
1257	007424	000453			BR	EXTDR	;GET OUT
1258	007426	005037	001226		BUFINX: CLR	WORK2	;CLEAR WORK2 FOR BLOCK COUNTER
1259	007432	013702	001134		MOV	DMA,R2	;PUT WORKING DISK ADD INTO WORK
1260	007436	005237	001226		XINCSER: INC	WORK2	;INCREMENT BLOCK COUNT
1261	007442	022702	007777		CMP	07777,R2	;CMP FOR LAST SECTOR
1262	007446	001405			BEQ	XINCSUR	;+1 SURFACE LAST SECTOR BRANCH
1263	007450	005202			INC	R2	;INC DMA
1264	007452	005337	001224		DEC	WORK1	;DEC BLOCK COUNT
1265	007456	001367			BNE	XINCSER	;FILLED STANDARD BUFFER YET?
1266	007460	000734			BR	AKH	;WILL TAKE STANDARD SIZE WORD COUNT
1267	007462	013737	001226	001130	XINCSUR: MOV	WORK2,WRDCT	;SETTING UP BLOCK COUNT
1268	007470	000241			CLC		;FOR NON STANDARD BUFFER SIZE
1269	007472	006137	001130		ROL	WRDCT	
1270	007476	006137	001130		ROL	WRDCT	
1271	007502	006137	001130		ROL	WRDCT	
1272	007506	006137	001130		ROL	WRDCT	
1273	007512	006137	001130		ROL	WRDCT	
1274	007516	022737	000004	001166	CMP	04,R804DT	;R803LA?
1275	007524	001410			BEQ	10	;YES
1276	007526	000241			CLC		
1277	007530	006137	001130		ROL	WRDCT	
1278	007534	005737	001166		TST	R804DT	;R804?
1279	007540	001402			BEQ	10	;NO
1280	007542	006137	001130		ROL	WRDCT	;YES
1281	007546	052737	000200	001126	10: BIS	0200,FLAG	;SET LAST DISK BUFFER FLAG
1282	007554	000207			EXTDR: RTS	PC	;EXIT

```

1203 ;THIS ROUTINE CONVERTS A WORD COUNT TO A BLOCK COUNT
1204 007556 022737 000004 001166 BLSZ:  CMP 04,R804DT ;R803LA
1205 007564 001004 BNE 38 ;NO
1206 007566 012737 000037 001154 MOV 037,BLOCK ;YES
1207 007574 000411 BR 28 ;CONTINUE
1208 007576 012737 000177 001154 38: MOV 0177,BLOCK ;SETUP FOR R804
1209 007604 005737 001166 TST R804DT ;R804?
1210 007610 001003 BNE 28 ;YES
1211 007612 012737 000077 001154 18: MOV 077,BLOCK ;PUT SECTOR SIZE INTO BLOCK
1212 007620 013702 001130 28: MOV WRDCT,R2 ;FETCH WORD COUNT
1213 007624 033702 001154 BIT BLOCK,R2 ;ARE THEY EQUAL?
1214 007630 001406 BEQ RORBLK ;YES
1215 007632 043702 001154 BIC BLOCK,R2 ;SET UP BLOCK OVERFLOW
1216 007636 005237 001154 INC BLOCK
1217 007642 063702 001154 ADD BLOCK,R2
1218 007646 000241 RORBLK: CLC
1219 007650 006002 ROR R2
1220 007652 022737 000004 001166 CMP 04,R804DT ;R803LA
1221 007660 001003 BNE 28 ;NO
1222 007662 004737 011736 JSR PC,RRR2 ;YES
1223 007666 000410 BR 18 ;CONTINUE
1224 007670 000241 28: CLC
1225 007672 006002 ROR R2
1226 007674 004737 011736 JSR PC,RRR2
1227 007700 005737 001166 TST R804DT ;R804?
1228 007704 001401 BEQ 18 ;NO
1229 007706 006002 ROR R2 ;YES
1230 007710 010237 001154 18: MOV R2,BLOCK ;BLOCK COUNT
1231 007714 000207 RTS PC ;EXIT
1232
1233 ;ROUTINE TO SELECT DATA PATTERNS FOR TEST
1234 ;ENTER FROM JSR R5,PASEL
1235 007716 012737 010352 000004 PASEL: MOV 0HEN,004 ;SETUP TRAP
1236 007724 012737 000340 000006 MOV 0340,006 ;VECTOR
1237 007732 013700 001136 MOV PATNU,R0 ;SET UP PATTERN NUMBER
1238 007736 010003 MOV R0,R3 ;GET PATTERN 0
1239 007740 000241 CLC ;MAKE IT 0
1240 007742 006003 ROR R3 ;TO PATTERN 0 IN LISTING
1241 007744 010377 171060 MOV R3,0DISPLAY ;DISPLAY PATTERN 0
1242 007750 013737 001130 001222 MOV WRDCT,WORK ;SET UP WORK
1243 007756 013701 001116 MOV VADDR,R1 ;LOC. OF OUTBUFFER
1244 007762 022700 000042 18: CMP 042,R0 ;TEST FOR RANDOM DATA NUMBER
1245 007766 001424 BEQ RANDOM ;GO GENERATE RANDOM DATA
1246 007770 032737 000004 001126 BIT 0BIT2,FLAG ;MAX TST?
1247 007776 001404 BEQ 28 ;NO
1248 010000 016037 000254 017416 MOV PAT0(0),OUTBUF ;GET PATTERN
1249 010006 000205 RTS R5
1250 010010 016000 000254 28: MOV PAT0(0),R0
1251 010014 010021 FILDAT: MOV R0,(1)+ ;FILL BUFFER
1252 010016 005337 001222 DEC WORK ;DEC. WORK COUNT
1253 010022 001374 BNE FILDAT ;LOAD NEXT WORD
1254 010024 012737 000006 000004 PASEX: MOV 06,004 ;RESTORE
1255 010032 005037 000006 CLR 006 ;TRAP
1256 010036 000205 RTS R5 ;BUFFER FULL

```

```

1337                                ;RANDOM DATA GENERATOR SUBROUTINE
1338
1339 010040 013737 010204 010210 RANDOM: MOV     LONUM,LOSAY
1340 010046 013737 010206 010212        MOV     MINUM,HISAV
1341 010054 013700 010204                RAND1: MOV     LONUM,R0
1342 010060 013704 010206                MOV     MINUM,R4
1343 010064 012703 000007                MOV     R7,R3
1344 010070 005002                        CLR     R2
1345 010072 006300                        SHIFT: ASL   R0
1346 010074 006104                        ROL    R4
1347 010076 006102                        ROL    R2
1348 010100 005303                        DEC    R3
1349 010102 001373                        BNE   SHIFT
1350 010104 063700 010204                ADD    LONUM,R0
1351 010110 005504                        ADC    R4
1352 010112 063704 010206                ADD    MINUM,R4
1353 010116 005502                        ADC    R2
1354 010120 062700 001057                ADD    01057,R0
1355 010124 005504                        ADC    R4
1356 010126 005502                        ADC    R2
1357 010130 062704 047401                ADD    047401,R4
1358 010134 005502                        ADC    R2
1359 010136 062702 000006                ADD    06,R2
1360 010142 062700 000002                ADD    02,R0
1361 010146 005504                        ADC    R4
1362 010150 010037 010204                MOV    R0,LONUM
1363 010154 010021                        MOV    R0,(1)+
1364 010156 005337 001222                DEC    WORK
1365 010162 001406                        BEQ   EXGEN
1366 010164 010437 010206                MOV    R4,MINUM
1367 010170 010421                        MOV    R4,(1)+
1368 010172 005337 001222                DEC    WORK
1369 010176 001326                        BNE   RAND1
1370 010200 000137 010024                EXGEN: JMP    PSEX
1371 010204 000000                LONUM: 0
1372 010206 000000                MINUM: 0
1373 010210 000000                LOSAV: 0
1374 010212 000000                HISAV: 0
1375
1376 010214 013737 001214 001144 RESTOR: MOV    SAVWC,SWRDCT
1377 010222 013737 001144 001130        MOV    SWRDC,WRDCT
1378 010230 013737 001220 001112        MOV    SAVWCB,WDCTB
1379 010236 000205                        RTS    R5

```

```

;SET UP R0 WITH 5 DIGITS LOW
;SET UP R1 WITH 5 DIGITS HIGH
;SET UP SHIFT COUNT
;CLEAR R2
;SHIFT R0 LEFT AND
;ROTATE CARRY INTO LSB OF R1 INTO
;ROTATE CARRY OUT OF R1 INTO R2
;DECREMENT R3
;CONTINUE SHIFT LOOP
;ADDN IN NUMBER TO MAKE X 129
;PROPOGATE CARRY
;ADDN IN NUMBER TO MAKE X 129
;PROPOGATE CARRY
;ADDN LOW CONSTANT
;PROPOGATE CARRIES
;PROPOGATE AGAIN
;ADDN HIGH CONSTANT
;PROPOGATE CARRY
;ADDN HIGHEST CONSTANT
;REPRIME R0 WITH HIGH DIGIT
;PROPOGATE CARRY
;PUT R0 BACK IN LONUM
;HOLD LONUM FOR PROGRAM

;PUT R1 BACK IN MINUM
;HOLD MINUM FOR PROGRAM

;RETURN TO PROGRAM

```

```

1380 ;RANDOM DATA GENERATOR SUBROUTINE
1381 ;WHEN SWITCH = 0 WE COME HERE
1382
1383 RAND:  MOV  LONUM1,R0      ;SET UP R0 WITH 5 DIGITS LOW
1384        MOV  HINUM1,R4      ;SET UP R1 WITH 5 DIGITS HIGH
1385        MOV  07,R3          ;SET UP SHIFT COUNT

1386        CLR  R2              ;CLEAR R2
1387 SHIF1: ASL  R0              ;SHIFT R0 LEFT AND
1388        ROL  R4              ;ROTATE CARRY INTO LSB OF R1 INTO
1389        ROL  R2              ;ROTATE CARRY OUT OF R1 INTO R2
1390        DEC  R3              ;DECREMENT R3
1391        BNE  SHIF1          ;CONTINUE SHIFT LOOP
1392        ADD  LONUM1,R0      ;ADDN IN NUMBER TO MAKE X 129
1393        ADC  R4              ;PROPOGATE CARRY
1394        ADD  HINUM1,R4      ;ADDN IN NUMBER TO MAKE X 129
1395        ADC  R2              ;PROPOGATE CARRY
1396        ADD  01057,R0      ;ADDN LOW CONSTANT
1397        ADC  R4              ;PROPOGATE CARRIES
1398        ADC  R2              ;PROPOGATE AGAIN
1399        ADD  047401,R4      ;ADDN HIGH CONSTANT
1400        ADC  R2              ;PROPOGATE CARRY
1401        ADD  06,R2          ;ADDN HIGHEST CONSTANT
1402        ADD  02,R0          ;REPRIME R0 WITH HIGH DIGIT
1403        ADC  R4              ;PROPOGATE CARRY
1404        MOV  R0,LONUM1      ;PUT R0 BACK IN LONUM
1405        MOV  R4,HINUM1     ;PUT R1 BACK IN HINUM
1406 EXGN1:  RTS  R5              ;RETURN TO PROGRAM
1407 LONUM1: 0
1408 HINUM1: 0

```

```

1410 ;TRAP OUT ROUTINE WHEN CREATING DATA BUFFER
1411
1412 MEN:
1413        TYPE  00+2          ;.ASCII <18><12>"WIN PORT "
1414        TST  A001          ;FIND WHAT DATA BUFFER
1415        BNE  30            ;BRANCH IF 0
1416        TYPE  00+2          ;.ASCII "A"
1417        BR   40
1418
1419        30:  TYPE  00+2          ;.ASCII "B"
1420        MOV  06,004        ;RESTORE
1421        CLR  006           ;TRAP
1422        BIT  0BIT15,08WR    ;HALT?
1423        BEQ  20            ;NO
1424        HALT
1425        JMP  00BEGIN

```

```

1426                                     ;THIS ROUTINE COMPARES THE DATA READ AGAINST THE DATA EXPECTED.
1427                                     ;ALL ERRORS ARE REPORTED TO THE OPERATOR, IF BIT 4 OF THE SWITCH
1428                                     ;REGISTER IS SET, THIS ROUTINE WILL CONTINUE COMPARING AFTER AN ERROR HAS BEEN
1429                                     ;FOUND AND WILL REPORT UP TO 8 VERIFY ERRORS WITHIN THE SAME INPUT OPERATION.
1430
1431 010446 012737 177770 001146 COMPAR: MOV      0-10,ERCOUNT ;ERROR RETRY COUNTER
1432 010454 052737 000010 001122        BIS      0BIT3,FLAG2 ;DOING COMPARE
1433 010462 013737 001130 001226        MOV      WRDCT,WORK2 ;GET THE WORD COUNT
1434 010470 013737 001116 001150        MOV      VADDR,SAVE ;SET UP OUTBUFFER POINTER
1435 010476 005037 001174                CLR      SWITCH ;CLEAR RANDOM PATTERN FLAG
1436 010502 013737 010210 010346        MOV      LOSAV,LONUM1 ;GET RANDOM BASE NOS.
1437 010510 013737 010212 010350        MOV      HISAV,HINUM1
1438 010516 005737 001136                TST     PATNU ;TEST FOR PATTERN 0
1439 010522 001015                BNE     10 ;NO
1440 010524 005037 001222                CLR     WORK ;CLEAR COUNTER
1441 010530 062737 000001 001222 20:    ADD     01,WORK ;INC COUNTER
1442 010536 001063                BNE     30 ;INTERRUPT YET?
1443 010540 104054                HLT     IDA\WCIDS ;TIMED OUT NOT INTERRUPT
1444 010542 000137 001234                JMP     00BEGIN
1445 010546 005737 001176 30:        TST     INTFLG ;TEST FOR INT
1446 010552 001766                BEQ     20 ;WAIT FOR INT BEFORE COMPARING
1447 010554 000426                BR      CMPLP1 ;CONT
1448 010556 022737 00 742 001136 10:    CMP     042,PATNU ;IS THIS RANDOM PATTERN?
1449 010564 001022                BNE     CMPLP1 ;BRANCH IF YES
1450 010566 005737 00 76                CMPLP1: TST     INTFLG ;INTERRUPT YET?
1451 010572 001778                BEQ     CMPLP ;NO WAIT
1452 010574 005737 0011 4                TST     SWITCH
1453 010600 001007                BNE     20
1454 010602 004537 010240                JSR     RS,RAND
1455 010606 013701 010346                MOV     LONUM1,GOOD ;GET EVEN RANDOM WORD
1456 010612 010637 001174                MOV     SP,SWITCH ;SET RANDOM PATTERN FLAG
1457 010616 000411                BR      WRDCMP
1458 010620 005037 001174 20:        CLR     SWITCH
1459 010624 013701 010350                MOV     HINUM1,GOOD
1460 010630 000404                BR      WRDCMP
1461 010632 013700 001136                CMPLP1: MOV     PATNU,R0
1462 010636 016001 000254                MOV     PAT0(R0),GOOD
1463 010642 160177 170302                WRDCMP: SUB     GOOD,0SAVE ;COMPARE DATA
1464 010646 001017                BNE     WDERR ;WORD IN ERROR
1465 010650 005337 001226                WRDINC: DEC     WORK2 ;DECREMENT THE WORD COUNT
1466 010654 001410                BEQ     ADAM ;EXIT ROUTINE IF ZERO
1467 010656 062737 000002 001150        ADD     02,SAVE ;UPDATE PATTERN ADDRESS
1468 010664 022737 000042 001136        CMP     042,PATNU ;IS THIS RANDOM PATTERN
1469 010672 001735                BEQ     CMPLP ;BRANCH IF YES
1470 010674 000762                BR      WRDCMP ;COMPARE NEXT WORD
1471 010676 042737 000010 001122        ADAM:  BIC     0BIT3,FLAG2 ;DONE WITH COMPARE
1472 010704 000205                RTS     R5 ;EXIT THIS ROUTINE

```

1473	010706	005737	001176		WDERR:	TST	INTFLG		;DID INTERRUPT OCCUR YET?
1474	010712	001753				BEQ	WRDCMP		;BRANCH IF NO
1475	010714	032777	000100	170104		BIT	%BIT6,%SWR		;TRY ALL?
1476	010722	001006				BNE	100		;YES
1477	010724	005737	001200			TST	LOPCNT		;FIRST READ ERROR?
1478	010730	001403				BEQ	100		;YES
1479	010732	005777	170074			TST	%RSCB1		;ANY ERRORS?
1480	010736	100757				BMI	ADAM		;YES DO NOT COMPARE
1481	010740	060177	170204		100:	ADD	GOOD,%SAVE		
1482	010744	017700	170200			MOV	%SAVE,BAD		;GET GOOD DATA
1483	010750	104436				LOGC			;LOG COMPARE ERROR
1484	010752	032777	001000	170046		BIT	%BIT9,%SWR		;LOOP ON ERROR?
1485	010760	001401				BEQ	110		;NO
1486	010762	005726				TST	(6)+		;YES UPDATE SP
1487	010764	004737	014204		110:	JSR	PC,PRNT		;TYPEOUT?
1488	010770	001007				BNE	30		;NO
1489	010772	104402	010776			TYPE	..+2		;ASCIZ <15><12>"CMP ERR"
1490	011010	104000			30:	HLT			;DATA COMPARE ERROR
1491	011012	004737	014204			JSR	PC,PRNT		;HAD TO DO IT THIS WAY SO
1492	011016	001022				BNE	130		;PROGRAM COULD LOOP ON ERROR
1493	011020	104402	011024			TYPE	..+2		;ASCIZ " ADDR="
1494	011034	005737	001212			TST	MMAVA		;IS MEN MGMT ON?
1495	011040	001406				BEQ	120		;NO
1496	011042	013746	177776			MOV	PS,-(6)		;GET PS
1497	011046	013746	001150			MOV	SAVE,-(6)		;GET VIRTUAL ADDR
1498	011052	104412				TYPEA			;CONVERT TO PHY AND TYPE
1499	011054	000403				BR	130		;CONT
1500	011056	013746	001150		120:	MOV	SAVE,-(6)		;GET ADDR
1501	011062	104406				TYPEB			;TYPE IT
1502	011064	005037	001154		130:	CLR	BLOCK		;CLEAR THE BLOCK COUNTER
1503	011070	013702	001130			MOV	WRDCT,R2		;GET THE WORD COUNT
1504	011074	005202				INC	R2		;CORRECT FOR DA CALCULATIONS
1505	011076	163702	001226			SUB	WORK2,R2		;DETERMINE DISTANCE OF FAILURE INTO BUFFER
1506	011102	022737	000004	001166	20:	CMP	04,R804DT		;R803LAT?
1507	011110	001003				BNE	140		;NO
1508	011112	162702	000040			SUB	040,R2		
1509	011116	000410				BR	90		;CONTINUE
1510	011120	005737	001166		140:	TST	R804DT		;R804?
1511	011124	001403				BEQ	70		;NO
1512	011126	162702	000200			SUB	0200,R2		;R803
1513	011132	000402				BR	90		;CONT
1514	011134	162702	000100		70:	SUB	0100,R2		
1515	011140	100403			90:	BNI	00		
1516	011142	005237	001154			INC	BLOCK		;UPDATE BLOCK COUNT FOR EACH 400 WORDS
1517	011146	000755				BR	20		

1518	011150	022737	000004	001166	001	CMP	04,R804DT	;R804LA
1519	011156	001003				BNE	158	;NO
1520	011160	062702	000040			ADD	040,R2	;RESTORE POSITIVE :
1521	011164	000410				BR	60	;CONTINUE
1522	011166	005737	001166		150:	TST	R804DT	;R804?
1523	011172	001403				BEQ	40	;NO
1524	011174	062702	000200			ADD	0200,R2	;R804
1525	011200	000402				BR	60	;CONT
1526	011202	062702	000100		40:	ADD	0100,R2	;RESTORE POSITIVE NUMBER
1527	011206	013737	001134	001224	60:	MOV	DMA,WORK1	;GET HEAD AND SECTOR ADDRESS
1528	011214	063737	001154	001224	50:	ADD	BLOCK,WORK1	
1529	011222	004737	014204			JBR	PC,PRNT	;TYPEOUT?
1530	011226	001014				BNE	10	;NO
1531	011230	104402	011234			TYPE	,,+2	;.ASCII " DA"
1532	011242	013746	001224			MOV	WORK1,-(6)	;PUT WORK1 ON STACK
1533	011246	104406				TYPE		;TYPE STACK IN OCTAL - SUPRESS
1534	011250	104402	011254			TYPE	,,+2	;.ASCII <15><12>
1535	011260	032777	000020	167540	10:	BIT	0BIT4,0SWP	;RETRY?
1536	011266	001405				BEQ	CLEAR	;NO
1537	011270	005237	001146			INC	ERCOUNT	;UPDATE ERROR COUNTER
1538	011274	001402				BEQ	CLEAR	
1539	011276	000137	010650			JNP	WRDINC	
1540	011302	032737	000004	001126	CLEAR:	BIT	0BIT2,FLAG	;XPER TEST?
1541	011310	001404				BEQ	30	;NO
1542	011312	032737	010000	001126		BIT	0BIT12,FLAG	;READY
1543	011320	001412				BEQ	20	;NO
1544	011322	013700	001116		30:	MOV	VADDR,R0	;GET STARTING ADDR OF BUFFER
1545	011326	013701	001130			MOV	WRDCT,R1	;NOW
1546	011332	005020			10:	CLR	(R0)+	;CLEAR BUFFER
1547	011334	005301				DEC	R1	;COUNT LOCATIONS
1548	011336	001375				BNE	10	;WAIT TILL DONE
1549	011340	042737	000010	001122		BIC	0BIT3,FLAG2	;DONE WITH COMPARE
1550	011346	000205			20:	RTS	R5	;NOW GET OUT
1551								
1552	011350	013737	001072	017416	APOINT:	MOV	SAVAST,OUTBUF	;SET STARTING ADDR FOR OUTBUF
1553	011356	013737	001072	001116		MOV	SAVAST,VADDR	;SAVE OUTBUF ADDR
1554	011364	005737	001212			TST	MNVA	;MEM MGMT?
1555	011370	001411				BEQ	EXTT	;NO
1556	011372	013702	001100			MOV	SAVNGA,R2	;SET UP MEM MGMT
1557	011376	004737	012020		MNSET:	JBR	PC,STMM2	;SETUP MEM MGMT
1558	011402	010237	001116			MOV	R2,VADDR	
1559	011406	013737	001120	017416		MOV	PHADDR,OUTBUF	
1560	011414	000207			EXTT:	RTS	PC	
1561								
1562	011416	013737	001112	001130	BPOINT:	MOV	WDCTB,WRDCT	;GET WC FOR B PORT
1563	011424	013737	001076	017416		MOV	SAVCPU,OUTBUF	
1564	011432	013737	001076	001116		MOV	SAVCPU,VADDR	
1565	011440	005737	001212			TST	MNVA	;MEM MGMT AVAILABLE?
1566	011444	001763				BEQ	EXTT	;NO
1567	011446	013702	001104			MOV	SAVNGC,R2	
1568	011452	000751				BR	MNSET	

```

1569 ;TYPE CAN NOT WRITE BLOCK
1570
1571 011454 004737 014204 WTN01 JSR PC,PRNT ;TYPEOUT?
1572 011460 001001 BNE 10 ;NO
1573 011462 000000 HALT ;HALT CANT WRITE BLOCK
1574 011464 005037 001200 101 CLR LOPCNT ;CLEAR ERR COUNTER

1575 011470 000207 RTS PC
1576
1577 ;ROUTINE TO SET UP STARTING ADDRESS FOR ALL PORTS
1578 ;AND TO CREATE WORD COUNT MAX= 20K
1579
1580 011472 013702 001070 EXTNEM: NOV STANEM,R2 ;GET BANK 0
1581 011476 005702 TST R2 ;DID WE TYPE 0?
1582 011500 001001 BNE 30 ;NO
1583 011502 005202 INC R2 ;YES MAKE 1
1584 011504 005737 001212 301 TST MMVA
1585 011510 001021 BNE 10 ;BRANCH IF MEM MGMT AVAILABLE
1586 011512 000241 CLC
1587 011514 004737 011736 JSR PC,RRR2
1588 011520 010237 001072 NOV R2,SAVAST ;SAVE A STARTING ADDR
1589 011524 032737 000100 001126 BIT 0BIT6,FLAG ;IS THERE A B PORT?
1590 011532 001430 BEQ 20 ;NO
1591 011534 013702 001074 NOV STDCON,R2 ;YES GET STARTING
1592 011540 000241 CLC
1593 011542 004737 011736 JSR PC,RRR2
1594 011546 010237 001076 NOV R2,SAVCPU ;SAVE IT
1595 011552 000420 BR 20 ;GET WC
1596 011554 000302 101 SWAB R2
1597 011556 006002 ROR R2
1598 011560 010237 001100 NOV R2,SAVNGA ;SAVE ADDR FOR A PORT
1599 011564 032737 000100 001126 BIT 0BIT6,FLAG ;IS THERE B PORT?
1600 011572 001410 BEQ 20 ;NO
1601 011574 013702 001074 NOV STDCON,R2
1602 011600 000302 SWAB R2
1603 011602 006002 ROR R2
1604 011604 010237 001102 NOV R2,SAVNGB ;SAVE B STARTING ADDR
1605 011610 010237 001104 NOV R2,SAVNGC ;SAVE CPU STARTING ADDR
1606 011614 013702 001106 201 NOV 012RAP,R2 ;GET 4K BLOCK COUNT
1607 011620 022737 000007 001106 CMP 07,012RAP ;IS IT GREATER THEN 20K?
1608 011626 101411 BLOS 40 ;YES MAKE IT 20K

```

TST4

1609	011630	000241		00:	CLC		
1610	011632	006002			ROR	R2	;NO CONVERT TO WC
1611	011634	004737	011736		JSR	PC,RRR2	
1612	011640	042702	000077		BIC	077,R2	;CLEAR BLOCK COUNT
1613	011644	010237	001144		MOV	R2,SWRDCT	;SAVE -A- PORT WC
1614	011650	000403			BR	50	;CONT
1615	011652	012737	060000	001144	40:	MOV	060000,SWRDCT
1616	011660	032737	000100	001126	50:	BIT	0BIT6,FLAG
1617	011666	001422			BEG	78	;NO GET OUT
1618	011670	013702	001110		MOV	SIZEBP,R2	;GET B 4K COUNT
1619	011674	022737	000007	001110		CMP	07,SIZEBP
1620	011702	101411			BLOS	68	;IS IT GREATER THEN 20K?
1621	011704	000241			CLC		;YES MAKE 20K
1622	011706	006002			ROR	R2	;NO CONVERT TO WC
1623	011710	004737	011736		JSR	PC,RRR2	
1624	011714	042702	000077		BIC	077,R2	;CLEAR SECTOR COUNT
1625	01172	010237	001112		MOV	R2,WDCTB	;SAVE WC FOR -B- PORT
1626	01172	000403			BR	78	;GET OUT
1627	011726	012737	060000	001112	60:	MOV	060000,WDCTB
1628	011734	000207			RTS	PC	;MADE 20K WD
1629							
1630	011736	006002			RRR2:	ROR	R2
1631	011740	006002				ROR	R2
1632	011742	006002				ROR	R2
1633	011744	006002				ROR	R2
1634	011746	000207				RTS	PC
1635							
1636	011750	032777	000200	167050	WAIT:	BIT	0BIT7,08WR
1637	011756	001003				BNE	18
1638	011760	004737	012312		JSR	PC,XWAIT	;WAIT IN BACKGROUND?
1639	011764	000401			BR	28	;NO
1640	011766	000001			10:	WAIT	;YES
1641	011770	000207			20:	RTS	;CONT
1642							
1643	011772	004737	014204		TYPREC:	JSR	PC,PRNT
1644	011776	001007				BNE	18
1645	012000	104402	000616			TYPE	,RECOV
1646	012004	013746	001200			MOV	LOPCNT,-(6)
1647	012010	104406				TYPES	;GET COUNT
1648	012012	104402	000636			TYPE	;TYPE IT
1649	012016	000207			10:	RTS	PC

```

1650
1651 012020 005737 001212      BTM21  TST      MAVA      ;MEM MGMT?
1652 012024 001002              BNE      30      ;YES
1653 012026 000137 012304              JMP      MDON     ;GET OUT
1654 012032 005037 172340      30:     CLR      00KIPAR0
1655 012036 010237 001150              NOV      R2,SAVE  ;SAVE R2

1656 012042 010237 172342              NOV      R2,00KIPAR1
1657 012046 006302              ASL      R2      ;CALCULATE PHYSICAL ADDR
1658 012050 006302              ASL      R2
1659 012052 006302              ASL      R2
1660 012054 006302              ASL      R2
1661 012056 006302              ASL      R2
1662 012060 042737 000040 001122      BIC      0BITS,FLAG2 ;THIS BIT IS A17
1663 012066 103003              BCC      10      ;CLEAR A17?
1664 012070 052737 000040 001122      BIS      0BITS,FLAG2 ;SET A17
1665 012076 042737 000020 001122      10:     BIC      0BIT4,FLAG2 ;SET BIT 5 FOR A17
1666 012104 006302              ASL      R2      ;CLEAR A16 FLAG
1667 012106 103003              BCC      20      ;GET A16 BIT
1668 012110 052737 000020 001122      BIS      0BIT4,FLAG2 ;CLEAR A16
1669 012116 010237 001120      20:     NOV      R2,PHADDR ;SET FLAG FOR A16
1670 012122 013702 001150              NOV      SAVE,R2  ;GET PHYSICAL ADDR
1671 012126 062702 000200              ADD      0200,R2 ;SET UP MEM MGMT
1672 012132 010237 172344              NOV      R2,00KIPAR2
1673 012136 062702 000200              ADD      0200,R2
1674 012142 010237 172344              NOV      R2,00KIPAR3
1675 012146 062702 000200              ADD      0200,R2
1676 012152 010237 172350              NOV      R2,00KIPAR4
1677 012156 062702 000200              ADD      0200,R2
1678 012162 010237 172352              NOV      R2,00KIPAR5
1679 012166 062702 000200              ADD      0200,R2
1680 012172 010237 172354              NOV      R2,00KIPAR6
1681 012176 012737 077406 172300      NOV      0200+256,-400+UP+RN,00KIPDR0 ;SET KIPDR0=RN UP 200 BLOCKS
1682 012204 012737 077406 172302      NOV      0200+256,-400+UP+RN,00KIPDR1 ;SET KIPDR1=RN UP 200 BLOCKS
1683 012212 012737 077406 172304      NOV      0200+256,-400+UP+RN,00KIPDR2 ;SET KIPDR2=RN UP 200 BLOCKS
1684 012220 012737 077406 172306      NOV      0200+256,-400+UP+RN,00KIPDR3 ;SET KIPDR3=RN UP 200 BLOCKS
1685 012226 012737 077406 172310      NOV      0200+256,-400+UP+RN,00KIPDR4 ;SET KIPDR4=RN UP 200 BLOCKS
1686 012234 012737 077406 172312      NOV      0200+256,-400+UP+RN,00KIPDR5 ;SET KIPDR5=RN UP 200 BLOCKS
1687 012242 012737 077406 172314      NOV      0200+256,-400+UP+RN,00KIPDR6 ;SET KIPDR6=RN UP 200 BLOCKS
1688 012250 012737 077406 172316      NOV      0200+256,-400+UP+RN,00KIPDR7 ;SET KIPDR7=RN UP 200 BLOCKS
1689 012256 012737 007600 172356      NOV      07600,00KIPAR7
1690 012264 012702 020000              NOV      020000,R2
1691 012270 012737 012306 000250      NOV      0NHABTS,00HNVEC
1692 012276 012737 000001 177572      NOV      01,00SR0  ;TURN ON MEM MGMT
1693 012304 000207      NDON:   RTS      PC
1694
1695      ;MEMORY MANAGEMENT ABORT ROUTINE FOR WRITE UP
1696 012306 000000      MNABTS: HALT    ;MEMORY MANAGEMENT TRAP
1697 012310 000002              RTI      ;CAUSED THE ABORT

```

```

1698                                     ;BACKGROUND TEST FOR INTERRUPTS
1699
1700 012312 052737 002000 001122 XWAIT: BIS 0BIT10,FLAG2 ;WAITING IN BACKGROUND TEST
1701 012320 012737 070000 012426          NOV 070000,NPRCNT ;SETUP TIMEOUT COUNTER
1702 012326 012701 012431          NOV 0NPR1+1,R1 ;SETUP WAIT LOOP
1703 012332 112711 000200          NOV0B 0200,(R1)
1704 012336                                     20:
1705 012336 105421          NEG0 (R1)+
1706 012340 105441          NEG0 -(R1)
1707 012342 105421          NEG0 (R1)+
1708 012344 105441          NEG0 -(R1)
1709 012346 105421          NEG0 (R1)+
1710 012350 105441          NEG0 -(R1)
1711 012352 105421          NEG0 (R1)+
1712 012354 105441          NEG0 -(R1)
1713 012356 105421          NEG0 (R1)+
1714 012360 105441          NEG0 -(R1)
1715 012362 105421          NEG0 (R1)+
1716 012364 105441          NEG0 -(R1)
1717 012366 105421          NEG0 (R1)+
1718 012370 105441          NEG0 -(R1)
1719 012372 105421          NEG0 (R1)+
1720 012374 105441          NEG0 -(R1)
1721 012376 102401          BVS 10
1722 012400 000000          HALT                                     ;ARITHMETIC OPERATION FAILED RUN DIAG
1723 012402 005337 012426          10: DEC NPRCNT
1724 012406 001353          SNE 20
1725 012410 104054          HLT 10A1MC1DS ;TIMED OUT NO INTERRUPT
1726 012412 000137 001234          JMP 00BEGIN
1727 012416 042737 002000 001122 NPRRET: BIC 0BIT10,FLAG2 ;CLEAR BKGROUND FLG
1728 012424 000207          RTS PC
1729 012426 000000          NPRCNT: 0
1730 012430 000000          NPR1: 0
1731                                     ;CLEAR ERROR TABLE
1732
1733 012432 012704 000020          ERRCL: NOV 020,R4 ;CLEAR
1734 012436 012703 017052          NOV 0ERTAB,R3 ;ERROR
1735 012442 005023          10: CLR (R3)+ ;TABLE
1736 012444 005304          DEC R4 ;DONE YET?
1737 012446 001375          SNE 10 ;NO
1738 012450 005037 001004          CLR PCNT ;CLEAR
1739 012454 005037 001006          CLR PCNT+2 ;PASS COUNT
1740 012460 005037 001124          CLR DROP ;CLEAR ALL DROPPED DRIVES
1741 012464 000200          RTS R5 ;RETURN

```

1742
1743
1744
1745
1746
1747
1748
1749
1750
1751
1752
1753
1754
1755
1756
1757
1758
1759
1760
1761
1762
1763
1764
1765
1766
1767
1768
1769
1770
1771
1772
1773
1774
1775
1776
1777
1778
1779
1780

012466	012706	000500		
012472	104402	000510		
012476	104420			
012500	012637	001160		
012504	004737	006774		
012510	004737	006840		
012514	104426			
012516	004737	013272		
012522	005037	001134		
012526	012737	012750	000024	
012534	012737	000340	000026	
012542	012737	000161	001172	
012550	104416			
012552	004737	011750		
012556	032737	001000	001126	
012564	001406			
012566	104006			
012570	012777	177777	166282	
012576	005077	166244		
012602	004737	007050		
012606	000755			
012610	000744			

```

;RH11 POWER FAIL TEST #1
;THE STARTING ADDRESS FOR THE WRITE POWER FAIL TEST IS 244. THE PROGRAM
;WRITE THE COMPLETE DISK WITH A 125252 PATTERN. THE PROGRAM WILL THEN
;TELL OPERATOR TO POWER DOWN, UNTIL THE POWER FAIL, THE PROGRAM WILL
;CONTINUE WRITING THE SAME PATTERN ON THE DISK.
;WHEN POWER FAIL OCCURS THE TRANSFER IS ABORTED
;AND THE PROGRAM HALTS. THE OPERATOR SHOULD
;NOW TURN POWER BACK ON. THE PROGRAM RESTARTS AND CHECKS FOR WRITE ERRORS.
;ONLY ONE ERROR IS ACCEPTABLE. THAT ERROR MAY BE AN OPI (BIT13 RBER)OR A DCK
;(BIT 15 RBER). IF THESE ARE THE ONLY ERRORS THAT OCCUR, THE DRIVE IS OK.
;IF NO ERRORS OCCUR, THE PROGRAM WILL TYPE OUT "OK".
;THE PROGRAM WILL THEN TELL YOU WHEN TO POWER DOWN AGAIN

```

```

;***ONLY ONE ERROR IS CONSIDERED ACCEPTABLE***
;NOTE: ALL DRIVES ON THE SYSTEM SHOULD BE POWERED OFF EXCEPT
;THE DRIVE UNDER TEST. *****

```

```

PFT1:  MOV     $500,SP           ;SET UP STACK
        TYPE   ,LOADSW
        RDOCT
        MOV     (SP)+,UNNUM
20:    JSR     PC,VECTR      ;SETUP INT VECTOR
        JSR     PC,FNDTYP   ;TST FOR R803 OR 04
PFWATT: CLR    DV          ;CLEAR ALL REG
        JSR     PC,PONFAL   ;WRITE 125252 ON DISK
PFWAT:  CLR    DMA
        MOV     @DOWN,24    ;SET UP POWER FAIL VEC.
        MOV     @340,26
MYBYWR: MOV     @161,CMD    ;WRITE WITH I/E
        DKCMD              ;DO IT
        JSR     PC,WATT     ;WAIT FOR INTERRUPT
30:    BIT     @BIT9,FLAG   ;ANY ERRORS?
        BEQ    10
        NLT   1DAIDB
        MOV     @-1,OR8AB  ;CLEAR ALL
        CLR    OR8ER      ;ERRORS
10:    JSR     PC,DISBUF   ;SET UP NEW DISK BUFFER
        BR     MYBYWR
        BR     PFWAT

```



```

1815 ;POWER FAIL TEST #2
1816 ;THIS TEST WILL TEST THE SAME DRIVE THAT WAS TESTED IN THE 1ST POWER FAIL TEST
1817 ;THE PROGRAM WILL WRITE THE COMPLETE DISK WITH A 125252 PATTERN AND WILL
1818 ;THEN TELL THE OPERATOR TO POWER DOWN THE PROCESSOR.
1819 ;THE PROGRAM WILL THEN WRITE CHECK THE DISK WHILE WAITING FOR A POWER FAIL.
1820 ;WHEN THE POWER FAIL OCCURS, THE WRITE CHECKING IS ABORTED AND

1821 ;THE PROCESSOR WILL HALT.
1822 ;THE OPERATOR SHOULD THEN TURN POWER BACK ON, THE PROGRAM WILL
1823 ;START WRITE CHECKING THE DISK AGAIN
1824 ;***NO ERRORS SHOULD OCCUR.***
1825 ;THE PROGRAM WILL TYPE OUT "OK" IF NO ERRORS OCCUR.
1826 ;THE PROGRAM WILL THEN TELL YOU TO POWER DOWN.
1827 ;DO NOT POWER OFF THE PROCESSOR AGAIN UNTIL THE PROGRAM TELLS YOU SO.
1828 ;NOTE: ALL DRIVES ON THE SYSTEM SHOULD BE POWERED OFF
1829 ;EXCEPT THE ONE UNDER TEST *****

1831 013014 012706 000500 PFT2: NOV 0500,SP ;SET UP STACK
1832 013020 042737 001000 001122 BIC 0BIT9,FLAG2 ;CLEAR POWER FAIL
1833 013026 012737 013050 001152 NOV 0PWRFL,WRDR ;RETURN HERE IF WRONG DRIVE INT.
1834 013034 104426 CLRDV ;INIT DRIVE
1835 013036 004737 006774 JSR PC,VECTR ;SETUP INT VECTOR
1836 013042 004737 013272 PWRFL2: JSR PC,PONFAL ;WRITE 125252 ON DISK
1837 013046 000401 BR PWRFL ;WRITE CHECK
1838 013050 104426 PWRFL: CLRDV ;INIT DRIVE
1839 013052 005037 001134 PWRFL: CLR DMA
1840 013056 012737 013222 000024 NOV 0PWRDN,24 ;SET UP POWER FAIL VEC.
1841 013064 012737 000340 000026 NOV 0340,26
1842 013072 013737 001066 177776 CHKDSK: NOV PRIORITY,PS ;ENABLE I/E
1843 013100 012737 000151 001172 NOV 0151,CMD ;WRITE CHECK WITH I/E
1844 013106 104416 DKCMD ;DO IT
1845 013110 004737 011750 JSR PC,WATT ;WAIT FOR INTERRUPT
1846 013114 032737 001000 001126 30: BIT 0BIT9,FLAG ;ANY ERRORS?
1847 013122 001411 BEQ 10 ;NO
1848 013124 104003 NLT 100 ;YES
1849 013126 002737 100000 001122 BIC 0BIT15,FLAG2 ;SET ERROR FLAG
1850 013134 005077 165706 CLR 0RSE ;CLEAR ALL
1851 013140 012777 177777 165702 NOV 0-1,0RSAS ;ERRORS
1852 013146 004737 007050 18: JSR PC,DISBUF ;CHECK NEXT BUFFER
1853 013152 000747 BR CHKDSK
1854 013154 032737 001000 001122 BIT 0BIT9,FLAG2 ;DID POWER FAIL?
1855 013162 001733 BEQ PWRFL ;NO
1856 013164 005737 001122 TST FLAG2 ;ANY ERRORS?
1857 013170 100405 BMI 20 ;YES
1858 013172 104402 013176 TYPE ,,+2 ;,ASCII <15><12>"OK"
1859 013204 042737 100000 001122 20: BIC 0BIT15,FLAG2 ;CLEAR ERRORS
1860 013212 042737 001000 001122 BIC 0BIT9,FLAG2 ;CLEAR POWER FAIL FLAG
1861 013220 000710 40: BR PWRFL2

```

```

1862                                     ;ROUTINE TO ABORT DISK DURING POWER FAIL
1863
1864 013222 012737 013232 000024 PWRDN: NOV      @PWRUP,24      ;SET UP RESTART
1865 013230 000000                                HALT
1866
1867 013232 012737 013222 000024 PWRUP: NOV      @PWRDN,24      ;RESET POWER FAIL VECTOR
1868 013240 012706 000500                                NOV      @500,8P
1869 013244 013777 001160 165562                                NOV      UNNUM,@RSC62    ;GET UNIT 0
1870 013252 052737 001000 001122                                BIS      @BIT9,FLAG2    ;SET POWER FAIL BIT
1871 013260 032777 000200 165556 18:  BIT      @BIT7,@RSD6    ;WAITING FOR
1872 013266 001774                                BEQ      18              ;DRIVE READY
1873 013270 000667                                BR       PWRF1          ;GO CHECK DISK
1874
1875
1876                                     ;ROUTINE TO WRITE THE COMPLETE DISK
1877                                     ;WITH 128282 PATTERN
1878                                     ;WRITE CHECK AND REPORT ERRORS IF THEY OCCUR
1879                                     ;REPORT "OK" AT COMPLETION
1880
1881 013272 012737 000020 001136 POWPAL: NOV      @20,PATNU      ;SET UP PATTERN
1882 013300 042737 000004 001126                                BIC      @BIT2,FLAG     ;CLEAR XFER MODE FLAG
1883 013306 052737 010000 001122                                BIS      @BIT12,FLAG2
1884 013314 005037 001134                                CLR      DMA
1885 013320 012737 020000 017416                                NOV      @20000,OUTBUF  ;GET STARTING ADDR FOR BUF
1886 013326 012737 020000 001116                                NOV      @20000,VADDR
1887 013334 012737 010000 001144                                NOV      @10000,SWRDCT  ;SETUP WORD COUNT
1888 013342 013737 001144 001130                                NOV      SWRDCT,WRDCT
1889 013350 005037 001116                                CLR      ADDR
1890 013354 013737 017416 001140                                NOV      OUTBUF,BUF     ;A PORT ONLY
1891 013362 004537 007716                                JSR      R5,PAGE1       ;SET UP CURRENT ADDRESS
1892 013366 012737 000161 001172 WRDWN: NOV      @161,CMD        ;GENERATE DATA BUFFER
1893 013374 104416                                DKCMD                                ;WRITE WITH I/E
1894 013376 004737 011750                                JSR      PC,WAIT        ;DO IT
1895 013402 012737 000151 001172 28: NOV      @151,CMD        ;WAIT FOR INTERRUPT
1896 013410 104416                                DKCMD                                ;WRITECHECK I/E
1897 013412 004737 011750                                JSR      PC,WAIT        ;DO IT
1898 013416 032737 001000 001126 48: BIT      @BIT9,FLAG     ;WAIT FOR INTERRUPT
1899 013424 001402                                BEQ      18              ;ANY ERRORS?
1900 013426 104006                                HLT     @DBIDA          ;NO
1901 013430 000000                                HALT                                ;YES
1902 013432 004737 007050 18: JSR      PC,DISBUF      ;CAN NOT WRITE WITHOUT ERROR
1903 013436 000753                                BR       WRDWN          ;SET UP NEW DISK BUFFER
1904 013440 104402 000743                                TYPE    ,PDOWN         ;WRITE NEW BUFFER
1905 013444 000207                                RTS     PC

```

1906	013446	032777	000010	165352	OUT:	BIT	0BIT3,0SWR	;TYPEOUT ERROR COUNT?
1907	013454	001526				BEQ	18	;NO
1908	013456	005004				CLR	R4	;CLEAR UNIT 0
1909	013460	005003				CLR	R3	
1910	013462	053737	001124	001162		BIS	DROP,UNITSV	;RESTORE ALL DRIVES
1911	013470	013737	001162	001222		MOV	UNITSV,WORK	;GET UNITS ON SYSTEM
1912	013476	012705	000401			MOV	0401,R5	;SETUP TEST FOR UNITS
1913	013502	030537	001222		40:	BIT	R5,WORK	;IS THIS UNIT ON SYS
1914	013506	001006				BNE	28	;YES
1915	013510	005204			58:	INC	R4	;INC UNIT 0
1916	013512	010403				MOV	R4,R3	;SAVE UNIT 0
1917	013514	000241				CLC		
1918	013516	006105				ROL	R5	;GET NEXT DRIVE
1919	013520	103501				BCB	38	;DONE
1920	013522	000767				BR	48	;FIND NEXT DRIVE
1921	013524	104402	000510		28:	TYPE	,LOADSW	
1922	013530	010446				MOV	R4,-(6)	;PUT R4 ON STACK
1923	013532	104406				TYPE		;TYPE STACK IN OCTAL - SUPRESS
1924	013534	004737	014012			JBR	PC,GETERR	;GET ERROR COUNT
1925	013540	010304				MOV	R3,R4	;RESTORE UNIT 0
1926	013542	104402	013546			TYPE	.,+2	;.ASCIZ <15><12>
1927	013552	104402	000564			TYPE	,WRITER	
1928	013556	104402	013562			TYPE	.,+2	;.ASCIZ "8 "
1929	013566	013746	001202			MOV	WRITER,-(6)	;PUT WRITER ON STACK
1930	013572	104406				TYPE		;TYPE STACK IN OCTAL - SUPRESS
1931	013574	104402	013600			TYPE	.,+2	;.ASCIZ <15><12>
1932	013604	104402	000607			TYPE	,RDERR	
1933	013610	104402	013614			TYPE	.,+2	;.ASCIZ "8 "
1934	013620	013746	001206			MOV	READER,-(6)	;PUT READER ON STACK
1935	013624	104406				TYPE		;TYPE STACK IN OCTAL - SUPRESS
1936	013626	104402	013632			TYPE	.,+2	;.ASCIZ <15><12>
1937	013636	104402	000574			TYPE	,WCERR	
1938	013642	104402	013646			TYPE	.,+2	;.ASCIZ "8 "
1939	013652	013746	001204			MOV	WCERR,-(6)	;PUT WCERR ON STACK
1940	013656	104406				TYPE		;TYPE STACK IN OCTAL - SUPRESS
1941	013660	104402	013664			TYPE	.,+2	;.ASCIZ <15><12>"COMPARE ERRS "
1942	013704	013746	001210			MOV	CONERR,-(6)	;PUT CONERR ON STACK
1943	013710	104406				TYPE		;TYPE STACK IN OCTAL - SUPRESS
1944	013712	104402	013716			TYPE	.,+2	;.ASCIZ <15><12>
1945	013722	000672				BR	58	;GET NEXT DRIVE
1946	013724	043737	001124	001162	38:	BIC	DROP,UNITSV	;REDROP DRIVES
1947	013732	062706	000002		18:	ADD	02,SP	;RESTORE SP DUE TO JMP EXIT FROM JBR ROUTINE
1948	013736	005137	001114			COM	ASB1	;SET A OR B PORT FLAG
1949	013742	032777	000040	165056		BIT	0BITS,0SWR	;TYPEOUT PASS COUNT?
1950	013750	001035				BNE	DONE	;NO
1951	013752	104402	013756			TYPE	.,+2	;.ASCIZ <15><12>"END PASS "
1952	013772	013746	001006			MOV	PCNT+2,-(6)	;PUT PCNT+2 ON STACK
1953	013776	104406				TYPE		;TYPE STACK IN OCTAL - SUPRESS
1954	014000	104402	014004			TYPE	.,+2	;.ASCIZ <15><12>
1955	014010	000415				BR	DONE	

1956	014012	006304			GETERR:	ASL	R4		;GET LOC IN
1957	014014	006304				ASL	R4		;ERR TABLE
1958	014016	0062704	017052			ADD	ERTAB,R4		
1959	014022	112437	001202			MOVW	(R4)+,WRITER		;GET WRITE ERRS
1960	014026	112437	001206			MOVW	(R4)+,READER		;GET READ ERRS
1961	014032	112437	001204			MOVW	(R4)+,WCERR		;GET WRITE CK ERRS
1962	014036	112437	001210			MOVW	(R4)+,COMERR		;GET COMPARE ERRS
1963	014042	000207				RTS	PC		
1964									
1965					.SBTTL			SDONE - BELL AND SCOPE ROUTINE	
1966									
1967	014044	104400			DONE:	SCOPE			;TERMINATIONS SCOPE FOR LOOPING
1968	014046	002737	000001	001006		ADD	01,PCNT+2		;ADD 1 TO THE PASS COUNT
1969	014054	005537	001004			ADC	PCNT		;MAKE IT DOUBLE PREC.
1970	014060	013700	000042		40:	MOV	0042,R0		;GET MONITOR ADDRESS
1971	014064	001405				BEG	SEND1		;IF NONE
1972	014066	000005				RESET			
1973	014070	004710			SENDAD:	JBR	7,(0)		;GO TO MONITOR
1974	014072	000240	000240	000240			240,240,240		;SAVE ROOM FOR ACT11
1975	014100	000137	003224		SEND1:	JMP	ADTST		;RETURN
1976									
1977	014104	000000			.TBIT:	0			;T BIT FLAG
1978									
1979	014106	012702	000001		.LOGW:	MOV	01,R2		;LOG WRITE ERR
1980	014112	005003			CLIND:	CLR	R3		;CLEAR INDEX FOR TABLE
1981	014114	000413				BR	ADDR		
1982									
1983	014116	012702	000400		.LOGR:	MOV	0400,R2		;LOG WRITE ERR
1984	014122	000773				BR	CLIND		
1985									
1986	014124	012702	000001		.LOGWC:	MOV	01,R2		;LOG WRITE CK ERR
1987	014130	012702	000002		SETIND:	MOV	02,R3		;SET INDEX FOR NEXT WD
1988	014134	000403				BR	ADDR		
1989									
1990	014136	012702	000400		.LOGC:	MOV	0400,R2		;LOG COMPARE ERR
1991	014142	000772				BR	SETIND		
1992									
1993	014144	005737	001200		ADDR:	TST	LOPCNT		;1ST TIME ERROR?
1994	014150	001014				BNE	10		;NO DO NOT COUNT IT
1995	014152	013704	001160			MOV	UNNUM,R4		;GET UNIT 0
1996	014156	006304				ASL	R4		;GET
1997	014160	006304				ASL	R4		;POSITION IN
1998	014162	006304				ADD	R3,R4		;ERR TABLE
1999	014164	000264	017052			ADD	R2,ERTAB(R4)		;TO ADD ERROR
2000	014170	004737	014204			JBR	PC,PRNT		;TYPEOUT?
2001	014174	001402				BEG	10		;YES
2002	014176	004737	014772			JBR	PC,DRP		;SHOULD I DROP DRIVE?
2003	014202	000002			10:	RTI			
2004									
2005	014204	032777	020000	164614	PRNT:	BIT	0BIT13,06WR		;INHIBIT TYPEOUT?
2006	014212	000207				RTS	PC		

2007	014214	052737	000004	001122	RSREG1	BIS	0BIT2,FLAG2	;SET ERROR FLAG
2008	014222	005737	016040			TST	.HLTCT	;SHOULD WE TYPE GOOD AND BAD
2009	014226	001017				BNE	00	;NO
2010	014230	104402	014234			TYPE	.,+2	;ASCIZ "BAD"
2011	014242	010046				MOV	BAD,-(6)	;PUT BAD ON STACK
2012	014244	104404				TYPEO		;TYPE STACK IN OCTAL
2013	014246	104402	014252			TYPE	.,+2	;ASCIZ "GOOD"
2014	014262	010146				MOV	GOOD,-(6)	;PUT GOOD ON STACK
2015	014264	104404				TYPEO		;TYPE STACK IN OCTAL
2016	014266			001				
2017	014266	104402	014272			TYPE	.,+2	;ASCIZ "CS1"
2018	014300	017746	164526			MOV	ORCS1,-(6)	;PUT ORCS1 ON STACK
2019	014304	104404				TYPEO		;TYPE STACK IN OCTAL
2020	014306			101				
2021	014306	104402	014312			TYPE	.,+2	;ASCIZ "ER"
2022	014320	017746	164522			MOV	ORER,-(6)	;PUT ORER ON STACK
2023	014324	104404				TYPEO		;TYPE STACK IN OCTAL
2024	014326			201				
2025	014326	104402	014332			TYPE	.,+2	;ASCIZ "CS2"
2026	014340	017746	164470			MOV	ORCS2,-(6)	;PUT ORCS2 ON STACK
2027	014344	104404				TYPEO		;TYPE STACK IN OCTAL
2028	014346	032737	000200	016040		BIT	0200,.HLTCT	;PRINT SECOND SET ?
2029	014354	001112				BNE	SEEC	;YES
2030	014356	032737	000100	016040		BIT	SAS,.HLTCT	;PRINT ER ?
2031	014364	001410				BEO	30	;NO
2032	014366	104402	014372			TYPE	.,+2	;ASCIZ "AS"
2033	014400	017746	164444			MOV	ORAS,-(6)	;PUT ORAS ON STACK
2034	014404	104404				TYPEO		;TYPE STACK IN OCTAL
2035	014406	032737	000020	016040	301	BIT	0DA,.HLTCT	;PRINT BUS ADDRESS
2036	014414	001410				BEO	40	;NO
2037	014416	104402	014422			TYPE	.,+2	;ASCIZ "SA"
2038	014430	017746	164404			MOV	ORSDA,-(6)	;PUT ORSDA ON STACK
2039	014434	104404				TYPEO		;TYPE STACK IN OCTAL
2040	014436	032737	000004	016040	401	BIT	0DA,.HLTCT	;PRINT DA ?
2041	014444	001410				BEO	50	;NO
2042	014446	104402	014452			TYPE	.,+2	;ASCIZ "DA"
2043	014460	017746	164356			MOV	ORSDA,-(6)	;PUT ORSDA ON STACK
2044	014464	104404				TYPEO		;TYPE STACK IN OCTAL
2045	014466	032737	000010	016040	501	BIT	0MC,.HLTCT	;PRINT MC?
2046	014474	001410				BEO	60	;NO
2047	014476	104402	014502			TYPE	.,+2	;ASCIZ "MC"
2048	014510	017746	164322			MOV	ORSMC,-(6)	;PUT ORSMC ON STACK
2049	014514	104404				TYPEO		;TYPE STACK IN OCTAL
2050	014516	032737	000040	016040	601	BIT	0DS,.HLTCT	;DRIVE STATUS
2051	014524	001410				BEO	90	;NO
2052	014526	104402	014532			TYPE	.,+2	;ASCIZ "DS"
2053	014540	017746	164300			MOV	ORSDS,-(6)	;PUT ORSDS ON STACK
2054	014544	104404				TYPEO		;TYPE STACK IN OCTAL
2055	014546	032737	000002	016040	901	BIT	0DB,.HLTCT	;PRINT DATA BUFFER

2056	014554	001461				BEG	PTDONE		;NO
2057	014556	104402	014562			TYPE	.,+2		;ASCIZ "DB"
2058	014570	017746	164260			MOV	ORSD, -(6)		;PUT ORSD ON STACK
2059	014574	104404				TYPEO			;TYPE STACK IN OCTAL
2060	014576	000137	014720			JMP	PTDONE		;GET OUT
2061	014602	042737	000200	016040	SEEC:	BIC	0200, .HLTCT		;CLEAR COMMON BIT
2062	014610	032737	000240	016040		BIT	0DT, .HLTCT		;PRINT DRIVE TYPE?
2063	014616	001410				BEG	100		;NO
2064	014620	104402	014624			TYPE	.,+2		;ASCIZ "DT"
2065	014632	017746	164222			MOV	ORSDT, -(6)		;PUT ORSDT ON STACK
2066	014636	104404				TYPEO			;TYPE STACK IN OCTAL
2067	014640	032737	000220	016040	100:	BIT	0MR, .HLTCT		;PRINT MN?
2068	014646	001410				BEG	110		;NO
2069	014650	104402	014654			TYPE	.,+2		;ASCIZ "MR"
2070	014662	017746	164170			MOV	ORMR, -(6)		;PUT ORMR ON STACK
2071	014666	104404				TYPEO			;TYPE STACK IN OCTAL
2072	014670	032737	000204	016040	110:	BIT	0LA, .HLTCT		;PRINT LA?
2073	014676	001410				BEG	PTDONE		;NO
2074	014700	104402	014704			TYPE	.,+2		;ASCIZ "LA"
2075	014712	017746	164134			MOV	ORSLA, -(6)		;PUT ORSLA ON STACK
2076	014716	104404				TYPEO			;TYPE STACK IN OCTAL
2077	014720	032737	010000	001122	PTDONE:	BIT	0BIT12, FLAG2		;POWER FAIL TEST?
2078	014726	001111				BNE	RETT		;YES
2079	014730	104402	014734			TYPE	.,+2		;ASCIZ <15><12>"PASS "
2080	014744	013746	001006			MOV	PCNT+2, -(6)		;PUT PCNT+2 ON STACK
2081	014750	104404				TYPEO			;TYPE STACK IN OCTAL - SUPRESS
2082	014752	032777	001000	164046		BIT	0BIT9, 0SNR		;LOOPING ON ERROR?
2083	014760	001404				BEG	DRP		;NO
2084	014762	104402	014766			TYPE	.,+2		;ASCIZ <15><12>
2085	014772	032777	000001	164026	DRP:	BIT	0BIT9, 0SNR		;DROP DRIVE?
2086	015000	001464				BEG	RETT		;NO
2087	015002	013704	001160			MOV	UNNUM, R4		;GET UNIT 0
2088	015006	004737	014012			JBR	PC, GETERR		;GET ERRORS
2089	015012	063737	001206	001206		ADD	WRITER, READER		;ADD THE ERRORS
2090	015020	063737	001206	001204		ADD	READER, WCERR		
2091	015026	063737	001204	001210		ADD	WCERR, CONERR		
2092	015034	022737	000023	001210		CMP	023, CONERR		;DROP DRIVE?
2093	015042	103043				BHS	RETT		;NO
2094	015044	053737	001164	001124		BIS	UNCMP, DROP		;DROP DRIVE
2095	015052	104402	015056			TYPE	.,+2		;ASCIZ <15><12>"DROPPED UNIT "
2096	015076	013746	001160			MOV	UNNUM, -(6)		;PUT UNNUM ON STACK
2097	015102	104404				TYPEO			;TYPE STACK IN OCTAL - SUPRESS
2098	015104	104402	000636			TYPE	,CRLF		
2099	015110	113703	001124			MOVB	DROP, R3		;GET DROPPED UNITS
2100	015114	113704	001162			MOVB	UNITSV, R4		;GET ALL DRIVES
2101	015120	020304				CMP	R3, R4		;ALL DRIVES DROPPED?
2102	015122	001003				BNE	20		;NO
2103	015124	000000				HALT			;NO MORE DRIVES
2104	015126	000137	001234			JMP	00BEGIN		;RESTART TEST
2105	015132	032737	100000	001126	20:	BIT	0BIT15, FLAG		;DID OPERATOR SELECT PATTERN
2106	015140	001002				BNE	30		;YES
2107	015142	005037	001136			CLR	PATNU		;NO CLEAR IT
2108	015146	000137	006666		30:	JMP	00EXTPPR		;GET NEXT DRIVE
2109	015152	000207			RETT:	RTS	PC		

```

2110 ;ROUTINE TO RESTORE LOADER
2111 015154 013705 015200 RLDRI: NOV LDR1,R5 ;GET FIRST ADDRESS OF WHERE LOADER IS
2112 ;TO BE RESTORED
2113 015160 012704 017446 NOV 017446,R4 ;ADDRESS WHERE LOADER IS STORED
2114 015164 012702 000155 NOV 0155,R2 ;WORD COUNT
2115 015170 012425 18: NOV (R4)+,(R5)+ ;RESTORE

2116 015172 005302 DEC R2
2117 015174 001375 BNE 10
2118 015176 000000 HALT ;DONE
2119 015200 017446 LDR1: ,WORD 17446 ;FIRST ADDRESS WHERE LOADERS ARE SAVED
2120
2121 172100 PARCSR=172100
2122 000114 PARVEC=114
2123 015202 012737 015274 000114 ,MANK: NOV 0,PARSRV,00PARVEC
2124 015210 012737 000340 000114 NOV 0340,00PARVEC+2 ;SET PRI LEVEL TO 7
2125 015216 013746 000004 NOV 004,-(SP) ;SAVE CURRENT ERROR VECTOR
2126 015222 013746 000004 NOV 006,-(SP) ;SAVE PRIORITY LEVEL
2127 015226 012737 000004 000004 NOV 06,004
2128 015234 012737 000002 000004 NOV 0RTI,006
2129 015242 012700 172100 NOV 0PARCSR,R0 ;GET FIRST CSR ADDR
2130 015246 012702 000001 NOV 01,R2
2131 015252 012720 000001 18: NOV 01,(R0)+ ;SET ACTION ENABLE IF AVAILABLE
2132 015256 006302 ABL R2 ;SHIFT AVAILABILITY INDICATOR
2133 015260 103374 BCC 10
2134 015262 012637 000004 NOV (SP)+,006 ;RESTORE ERROR VECTOR PRIORITY
2135 015266 012637 000004 NOV (SP)+,004 ;AND INTERRUPT VECTOR
2136 015272 000207 RTS PC
2137 ;PARITY MEMORY TRAP
2138
2139 015274 104402 000760 ,PARSRV: TYPE ,PAREER
2140 015300 032737 004000 001122 BIS 0BIT11,FLAG2 ;SET ERROR FLAG
2141 015306 032737 000010 001122 BIT 0BIT3,FLAG2 ;WERE WE COMPARING DURING ERROR?
2142 015314 001422 BEQ 130 ;NO
2143 015316 104402 015322 TYPE ,,+2 ;,ASCIZ * ADDR*
2144 015332 005737 001212 TST MVA ;IS MEM MGMT ON?
2145 015336 001404 BEQ 120 ;NO
2146 015340 013746 177776 NOV PS,-(6) ;GET PS
2147 015344 013746 001150 NOV SAVE,-(6) ;GET VIRTUAL ADDR
2148 015350 104412 TYPEA ;CONVERT TO PHY AND TYPE
2149 015352 000403 BR 130 ;CONT
2150 015354 013746 001150 128: NOV SAVE,-(6) ;GET ADDR
2151 015360 104406 TYPES ;TYPE IT
2152 015362 032777 100000 163426 136: BIT 0BIT15,05WR ;HALT ON ERROR?
2153 015370 001401 BEQ 10 ;NO
2154 015372 000000 HALT ;YES
2155 015374 012706 000500 18: NOV 0500,SP ;RESET STACK
2156 015400 000137 003240 JMP EXMFLG ;RESTART TEST

```

2157
 2158
 2159
 2160
 2161
 2162
 2163
 2164
 2165
 2166
 2167 015404 010446
 2168 015406 010546
 2169 015410 017608 000004
 2170 015414 032708 177400
 2171 015420 001002
 2172 015422 016608 000004
 2173 015426 105718
 2174 015430 001423
 2175 015432 122718 000012
 2176 015436 001012
 2177 015440 113704 001018
 2178 015444 113777 001014 163382 56:
 2179 015452 105777 163340
 2180 015456 100375
 2181 015460 005304
 2182 015462 001370
 2183 015464 112577 163334 40:
 2184 015470 105777 163322
 2185 015474 100375
 2186 015476 000753
 2187 015500 017646 000004 20:
 2188 015504 022766 000002 000006
 2189 015512 022666 000004
 2190 015516 001006
 2191 015520 042708 000002
 2192 015524 042708 000001
 2193 015530 010966 000004
 2194 015534 012608 36:
 2195 015536 012604
 2196 015540 000002

.SDTTL @TYPE - TTY TYPEOUT ROUTINE

;THIS ROUTINE IS USE TO TYPE ASCII MESSAGES ON THE TTY. THE
 ;CALL CAN BE IN ONE OF 3 FORMS: 1) "TYPE ,ADR" - TYPES THE
 ;MESSAGE STARTING IN LOCATION "ADR", 2) "TYPE ,CHAR" - TYPES
 ;THE ASCII "CHAR", AND 3) "PRINT <<15><12>"MESSAGE"> - TYPES
 ;THE MESSAGE WHICH IS INLINE ASCII, THE FILLER CHARACTER WHICH IS
 ;TYPED AFTER A LINE FEED IS IN FILCHR AND THE NUMBER OF FILLERS
 ;IS IN FILCHR+1.

```

.TYPE:  NOV      R4,=(6)          ;SAVE R4
        NOV      R5,=(6)          ;SAVE R5
        NOV      @4(6),R5        ;GET ADDRESS TO BE TYPED
        BIT      @177400,R5      ;IS IT A TYPEN?
        BNE      10              ;NO
        NOV      @4(6),R5        ;GET ADDRESS OF CHARACTER
        TSTB    (R5)            ;TERMINATOR?
        BEQ      20              ;GET OUT IF SO
        CNPB    @12,(R5)        ;IS THE CHAR A LINE FEED
        BNE      40              ;NO - GET OUT
        NOV     FILCHR+1,R4      ;GET THE FILL COUNT
        NOV     FILCHR,@TPB     ;TYPE A FILLER
        TSTB    @TPB           ;DONE YET?
        BPL     .-4             ;NO - WAIT
        DEC     R4              ;DEC COUNT
        BNE     50              ;LOOP UNTIL 0
        NOV     (R5)+,@TPB     ;LOAD AND TYPE THE CHARACTER
        TSTB    @TPB           ;IS THE PRINTER READY
        BPL     .-4             ;WAIT UNTIL IT IS
        BR      10              ;GET THE NEXT CHARACTER
        NOV     @4(6),-(6)      ;GET ADDRESS TO BE TYPED
        ADD     @2,@(6)         ;ADD 2 TO THE ADDRESS
        CNP     (6)+,@4(6)     ;IS IT .+2?
        BNE     30              ;NO
        ADD     @2,R5           ;ADD 2 TO THE ADDRESS
        BIC     @1,R5          ;BACK UP TO AN EVEN BYTE
        NOV     R5,@4(6)       ;RESTORE ADDRESS
        NOV     (6)+,R5        ;RESTORE R5
        NOV     (6)+,R4        ;RESTORE R4
        RTI                    ;RETURN
    
```

```

2197          .SBTTL          SSCOPE - SCOPE LOOP HANDLER
2198
2199          ;THIS ROUTINE HANDLES THE ITERATIONS, LOOPING, ERROR
2200          ;LOOPING, AND THE DISPLAYING OF THE TEST NUMBER.
2201          ;"SCOPE" IS PLACED BETWEEN EACH SUBTEST IN THE TEST AND
2202          ;RECORDS THE STARTING ADDRESS OF THE SUBTEST IN "LAD:"
2203
2204 015542 104442          .SCOPE: KBDIN          ;GO CHECK FOR "G
2205 015544 032777 040000 163254          BIT      0SW14,0SWR          ;LOOP ON TEST?
2206 015552 001045          BNE      .KIT          ;LOOP ON TEST IS SET
2207 015554 000416          BR       30          ;SKIP - NOP FOR XOR TESTER
2208 015556 013746 000004          MOV      004,-(6)          ;PUSH 004 ON STACK
2209 015562 012737 018602 000004          MOV      048,004          ;SET FOR TIMEOUT
2210 015570 005737 177060          TST     00177060          ;ERROR ON XOR?
2211 015574 012637 000004          MOV      (6)+,004          ;POP STACK INTO 004
2212 015600 000422          BR       .SVLAD          ;NO ERROR - GO TO NEXT TEST
2213 015602 022626          40:    CMP      (6)+,(6)+          ;CLEAR STACK
2214 015604 012637 000004          MOV      (6)+,004          ;POP STACK INTO 004
2215 015610 000426          BR       .KIT          ;ERROR - LOOP ON TEST
2216 015612 032777 004000 163206 30:    BIT      0SW11,0SWR          ;KILL ITERATIONS
2217 015620 001012          BNE      .SVLAD          ;YES - KILL ITERATIONS
2218 015622 105737 001001          TSTB   ICNT+1          ;FIRST ONE?
2219 015626 001404          BEQ     20          ;BRANCH IF FIRST
2220 015630 123737 018714 001001          CNPB   TIMES,ICNT+1          ;DONE?
2221 015636 003013          BGT     .KIT          ;BRANCH IF NOT
2222 015640 112737 000001 001001 20:    MOVB   01,ICNT+1          ;FIRST ITERATION
2223 015646 105237 001000          .SVLAD: INCB   ICNT          ;COUNT TEST NUMBERS
2224 015652 011637 001010          MOV     (6),LAD          ;SAVE LOOP ADDRESS
2225 015656 013777 001000 163144          MOV     ICNT,0DISPLAY          ;DISPLAY TEST NO. AND ITERATION COUNT
2226 015664 000002          RTI          ;RETURN
2227
2228 015666 105237 001001          .KIT:   INCB   ICNT+1          ;INC THE ITERATION COUNT
2229 015672 013777 001000 163130 .OVER:  MOV     ICNT,0DISPLAY          ;SET UP DISPLAY
2230 015700 005737 001010          TST     LAD          ;FIRST ONE?
2231 015704 001760          BEQ     .SVLAD          ;YES
2232 015706 013716 001010          MOV     LAD,(6)          ;FUDGE RETURN ADDRESS
2233 015712 000002          RTI          ;FIXES PS
2234
2235 015714 000001          TIMES: 1          ;RUN 1 TIMES

```

```
2236          .SBTTL          SHLT - HLT ROUTINE (ERROR TYPEOUT)
2237
2238          ;THIS ROUTINE PRINTS OUT ERROR MESSAGES STARTING WITH THE
2239          ;ADDRESS OF THE "HLT". IT ALSO COUNTS THE NUMBER OF ERRORS
2240          ;AND HAS THE CAPABILITY OF LOOPING ON ERROR, BELL ON ERROR,
2241          ;"HALT" ON ERROR, AND INHIBIT TYPEOUTS. AN OPTIONAL ARGUMENT
2242          ;(HLT+3) WILL BE PLACED IN ".HLTCT:" FOR ADITIONAL TYPEOUTS.
2243
2244          015716 005237 001002          .HLT:      INC          ERRORS          ;INC THE ERROR COUNT
2245          015722 104442          KBDIN          ;GO CHECK FOR "G
2246          015724 032777 020000 163074          BIT          0SW13,0SWR          ;SKIP TYPEOUT IF SET
2247          015732 001725          BNE          20          ;SKIP TYPEOUTS
2248          015734 104402 015740          TYPE          ,,+2          ;.ASCIZ <15><12>
2249          015744 011637 001012          MOV          (6),HLTADR          ;PUT ADDRESS OF INSTRUCTION ON STACK
2250          015750 162737 000002 001012          SUB          02,HLTADR          ;FUDGE ADDRESS
2251          015756 117737 163030 016040          MOVB         0HLTADR,.HLTCT          ;GET HLT ARGUMENT
2252          015764 013746 001012          MOV          HLTADR,-(6)          ;PUT HLTADR ON STACK
2253          015770 104404          TYPEO          ;TYPE STACK IN OCTAL
2254          015772 104402 015776          TYPE          ,,+2          ;.ASCIZ " "
2255          016002 004737 014214          JSR          PC,RBREG          ;GO TO USER ERROR ROUTINE
2256          016006 005777 163014          20:         TST          0SWR          ;HALT ON ERROR
2257          016012 100001          BPL          ,+4          ;SKIP IF CONTINUE
2258          016014 000000          HALT          ;HALT ON ERROR!
2259          016016 032777 001000 163002          BIT          0SW9,0SWR          ;CHECK FOR INHIBIT LOOP ON ERROR
2260          016024 001003          BNE          30          ;SKIP IF LOOP ON ERROR
2261          016026 105037 001001          CLRB         ICNT+1          ;CLEAR ITERATION COUNT
2262          016032 000002          RTI          ;RETURN
2263          016034 000137 015666          30:         JNP          .KIT          ;LOOP ON TEST UNTIL NO ERRORS
2264
2265          016040 000000          .HLTCT: 0          ;HLT ARGUMENT
```

```

2266          .SBTTL          SOCTAL - OCTAL TYPEOUT ROUTINE
2267
2268          ;THIS ROUTINE IS USED TO TYPE AN OCTAL NUMBER ON THE TTY. IT WILL TYPE
2269          ;ALL 6 CHARACTERS, SUPPRESS LEADING ZEROES, OR TYPE THE
2270          ;16 BITS. IT IS CALLED VIA THE TYOCT, TYPBIT, OR TYOCS MACRO'S.
2271
2272 016042 012737 170101 016230 .TYPEB: MOV      0170101,.PR      ;SET BIT FLAG AND 16. CHARACTER COUNT
2273 016050 000411                BR          .PTIT          ;NOW TYPE IT IN BIT FORM
2274 016052 112737 000001 016230 .TYPEO: MOVB    01,.PR          ;SET ZERO FILL SWITCH
2275 016060 000402                BR          .+6          ;SKIP
2276 016062 005037 016230        .TYPES: CLR          .PR          ;SUPPRESS LEADING ZERO'S
2277 016066 112737 177772 016231        MOVB    0-6,.PR+1      ;SET COUNT
2278 016074
2279 016074 014446                .PTIT:   MOV      R4,-(6)      ;PUSH R4 ON STACK
2280 016076 010546                MOV      R5,-(6)      ;PUSH R5 ON STACK
2281 016100 016605 000010        MOV      10(6),R5     ;GET THE DATA
2282 016104 012704 016232        MOV      0,PR+2,R4    ;SET POINTER TO FIRST ASCII CHAR.
2283 016110 105014                CLR      (4)          ;CLEAR FIRST BYTE
2284 016112 000411                BR          .PRF       ;ROTATE FIRST BIT
2285 016114 105014                .PRL:   CLR      (4)          ;CLEAR BYTE OF CHARACTER
2286 016116 032737 000100 016230        BIT      0100,.PR     ;BIT TYPING MODE?
2287 016124 001004                BNE     .PRF          ;YES - SKIP 2 ROTATES
2288 016126 006105                ROL     R5            ;ROTATE BIT INTO C
2289 016130 106114                ROLB    (4)          ;PACK IT
2290 016132 006105                ROL     R5            ;ROTATE BIT INTO C
2291 016134 106114                ROLB    (4)          ;PACK IT
2292 016136 006105                .PRF:   ROL     R5            ;ROTATE BIT INTO C
2293 016140 106114                ROLB    (4)          ;PACK IT
2294 016142 105714                TSTB    (4)          ;IS IT ZERO?
2295 016144 001402                BEQ     .+6          ;SKIP INC
2296 016146 105237 016230        INCB    .PR          ;SET FILL SWITCH
2297 016152 105737 016230        TSTB    .PR          ;CHECK FILL SWITCH
2298 016156 001402                BEQ     .+6          ;SKIP BITSET
2299 016160 152724 000060        BISH    0'0,(4)+     ;MAKE INTO ASCII CHAR
2300 016164 105237 016231        INCB    .PR+1        ;INC COUNT
2301 016170 001351                BNE     .PRL         ;REPEAT
2302 016172 022704 016232        CMP     0,PR+2,R4    ;EMPTY BUFFER?
2303 016176 001002                BNE     .+6          ;SKIP IF NOT
2304 016200 112724 000060        MOVB    0'0,(4)+     ;LOAD 1 ZERO
2305 016204 105014                CLR      (4)          ;NULL TERMINATOR
2306 016206 104402 016232        TYPE    .,PR+2       ;TYPE IT
2307 016212 012605                MOV     (6)+,R5      ;POP STACK INTO R5
2308 016214 012604                MOV     (6)+,R4      ;POP STACK INTO R4
2309 016216 016666 000002 000004        MOV     2(6),4(6)    ;GET RID OF
2310 016224 012616                MOV     (6)+,(6)     ;DATA WORD
2311 016226 000002                RTI
2312
2313 016230 000012                .PRI:   .BLKN    12      ;COUNT, SWITCH, AND OUTPUT BUFFER

```

```

2314          .SBTTL          SPPOWER - POWER DOWN AND UP ROUTINES
2315
2316          ;THIS IS THE POWER FAIL ROUTINE WHICH WILL SAVE ALL
2317          ;THE GENERAL REGISTERS AND USER DEFINED REGISTERS THEN
2318          ;WAIT FOR POWER TO GO DOWN AND BE RESTORED.
2319          ;IF THERE ISN'T ENOUGH TIME FOR SAVING ALL THE REGISTERS,
2320          ;THE PROGRAM WILL HALT AT '.ILLUP'.
2321
2322 016254 012777 016402 000126 .POWER: MOV      0,ILLUP,0,PUVEC ;SET FOR FAST UP
2323 016262 012777 000340 000122          MOV      0340,0,PUVEC+2 ;PRIO:7
2324 016270 010046          MOV      R0,-(6) ;PUSH R0 ON STACK
2325 016272 010146          MOV      R1,-(6) ;PUSH R1 ON STACK
2326 016274 010246          MOV      R2,-(6) ;PUSH R2 ON STACK
2327 016276 010346          MOV      R3,-(6) ;PUSH R3 ON STACK
2328 016300 010446          MOV      R4,-(6) ;PUSH R4 ON STACK
2329 016302 010546          MOV      R5,-(6) ;PUSH R5 ON STACK
2330 016304 010637 016406          MOV      SP,.SAVR6 ;SAVE SP
2331 016310 012777 016320 000072          MOV      0,POWUP,0,PUVEC ;SET UP VECTOR
2332 016316 000000          HALT ;WAIT FOR PF
2333
2334 016320 013706 016406          .POWUP: MOV      .SAVR6,SP ;GET SP
2335 016324 005001          CLR      R1 ;WAIT LOOP FOR THE TTY
2336 016326 005201          10: INC     R1 ;WAIT FOR THE INC
2337 016330 001376          BNE     10 ;OF WORD
2338 016332 012605          MOV      (6)+,R5 ;POP STACK INTO R5
2339 016334 012604          MOV      (6)+,R4 ;POP STACK INTO R4
2340 016336 012603          MOV      (6)+,R3 ;POP STACK INTO R3
2341 016340 012602          MOV      (6)+,R2 ;POP STACK INTO R2
2342 016342 012601          MOV      (6)+,R1 ;POP STACK INTO R1
2343 016344 012600          MOV      (6)+,R0 ;POP STACK INTO R0
2344 016346 012737 016284 000024          MOV      0,POWER,0024 ;SET UP THE POWER DOWN VECTOR
2345 016354 012737 000340 000026          MOV      0340,0026 ;PRIO:7
2346 016362 104402 016366          TYPE   ,,+2 ;.ASCII <15><12>"POWER"
2347 016376 000137 007012          JMP     TIMUP ;JMP TO USER ADDRESS
2348
2349 016402 000000          .ILLUP: HALT ;THE POWER UP SEQUENCE WAS STARTED
2350 016404 000776          BR      .-2 ; BEFORE THE POWER DOWN WAS COMPLETE
2351
2352 016406 000000          .SAVR6: 0 ;PUT THE SP HERE
2353 016410 000024 000026          .PUVEC: 24,26 ;POWER UP VECTOR

```

```

2354
2355
2356
2357
2358
2359
2360
2361 016414
2362 016414 010446
2363 016416 010546
2364 016420 016605 000012
2365 016424 016604 000010
2366 016430 016666 000006 000010
2367 016436 016666 000004 000006
2368 016444 016666 000002 000004
2369 016452 012616
2370 016454 010346
2371 016456 000305
2372 016460 006005
2373 016462 006005
2374 016464 006005
2375 016466 042705 177771
2376 016472 016505 016612
2377 016476 010403
2378 016500 042704 160000
2379 016504 000303
2380 016506 006003
2381 016510 006003
2382 016512 006003
2383 016514 006003
2384 016516 042703 177761
2385 016522 060305
2386 016524 011505
2387 016526 006305
2388 016530 006305
2389 016532 006305
2390 016534 006305
2391 016536 006003
2392 016540 006305
2393 016542 006103
2394 016544 006305
2395 016546 006103
2396 016548 060405
2397 016552 005503
2398 016554 006305
2399 016556 006103
2400 016560 110337 016232
2401 016564 062737 000060 016232
2402 016572 012704 016233
2403 016576 012737 178401 016230
2404 016604 012603
2405 016606 000137 016114
2406
2407 016612 172340
2408 016614 172340
2409 016616 172340

```

```

.SBTTL          STYPEA - 18 BIT ADDRESS TYPER

;THIS ROUTINE TAKES 2 ARGUMENTS OFF THE STACK (OLD
;SP AND ADDRESS) AND, USING THE MEMORY MANAGEMENT REGISTERS, TYPES
;THE ADDRESS SUPPLIED IN 18 BIT FORM. THIS ROUTINE IS LINKED
;VIA THE 'TYPADR' MACRO.

.STYPEA:
MOV      R4,-(6)          ;PUSH R4 ON STACK
MOV      R5,-(6)          ;PUSH R5 ON STACK
MOV      12(6),R5        ;R5 - OLD PS WITH PREVIOUS MODE
MOV      10(6),R4        ;R4 - ADDRESS TO BE DECODED AND TYPED
MOV      6(6),10(6)      ;MOVE
MOV      4(6),6(6)       ;DOWN
MOV      2(6),4(6)       ;FOUR
MOV      (6)+,(6)        ;WORDS
MOV      R3,-(6)         ;PUSH R3 ON STACK
SWAB     R5              ;GET THE
ROR      R5              ;2 PREVIOUS
ROR      R5              ;MODE BITS
ROR      R5              ;INTO POSITION
BIC      0177771,R5      ;TO USE AS AN OFFSET
MOV      .SATAB(5),R5    ;R5 - SPACE ADDRESS FOR MM
MOV      R4,R3           ;R3 - REGISTER OFFSET
BIC      0160000,R4      ;CLEAR THE MM REG SELECT BITS
SWAB     R3              ;NOW MAKE
ROR      R3              ;MM REG
ROR      R3              ;SELECT BITS
ROR      R3              ;INTO AN
ROR      R3              ;OFFSET
BIC      0177761,R3      ;CLEAR THE JUNK BITS
ADD      R3,R5           ;ADD THE OFFSET TO THE TABLE
MOV      (5),R5         ;GET THE ISAR DATA
ASL      R5              ;THIS IS
ASL      R5              ;TO SHIFT
ASL      R5              ;THE SEGMENT
ASL      R5              ;ADDRESS
CLR      R3              ;INTO AN
ASL      R5              ;AN 18 BIT
ROL      R3              ;ADDRESS
ASL      R5              ;POSITION
ROL      R3              ;WITH R3 CONTAINING
ADD      R4,R5          ;THE UPPER 2 BITS
ADC      R3              ;AND R5 CONTAINING
ASL      R5              ;THE 16 BIT ADDRESS
ROL      R3              ;THEN SHIFT FOR TYPING
MOVB     R3,.PR+2        ;GET THE FIRST NUMBER FROM R3
ADD      0'0,.PR+2      ;MAKE IT INTO A NUMBER
MOV      0,PR+3,R4      ;PUDGE IN THE POINTER
MOV      0178401,.PR    ;AND THE FLAGS (FILL & 5 BYTES)
MOV      (6)+,R3        ;POP STACK INTO R3
JMP      .PRL           ;DECODE AND TYPE THE REST

.SATAB: 172340          ;KISAR0
        172340          ;SISAR0
        172340          ;KISAR0 - NEVER USED

```

MAINDEC-11-DERSC-E
DERSC.E.P11

RH11-R803-R803/LA-R804 DATA AND RELIABILITY TEST
STYPERA - 10 BIT ADDRESS TYPED

MACY11 37(732) 26-MAY-76 13:08 PAGE 36 SEQ 0071

2410 016620 177640

177640

;UISARD

2411
2412
2413
2414
2415
2416

.SBTTL STRAP - TRAP HANDLER

;THIS ROUTINE DECODES A TRAP CALL AND JUMPS TO THE APROPRATE
;SUBROUTINE. THE CALL IS A "TRAP+N" WHERE N IS A MULTIPLE OF 2.
;THE "SET" MACRO WILL CREATE THE TABLE NEEDED. IT HAS TO
;FOLLOW THIS MACRO.

2417

2418 016622 011646
2419 016624 162716 000002
2420 016630 017616 000000
2421 016634 062716 112242
2422 016640 013607
2423
2424 016642 015542
2425 016644 015404
2426 016646 016052
2427 016650 016062
2428 016652 021226
2429 016654 016414
2430 016656 006120
2431 016660 006142
2432 016662 017264
2433 016664 016710
2434 016666 021172
2435 016670 000316
2436 016672 014106
2437 016674 014116
2438 016676 014124
2439 016700 014136
2440 016702 017174
2441 016704 017112
2442 016706 020000

```
.TRAP:  MOV      (6),-(6)      ;GET ADDRESS OF TRAP +2
        SUB      02,(6)      ;MAKE IT ADDRESS OF TRAP
        MOV      0(6),(6)    ;GET TRAP INSTRUCTION
        ADD      0,TRP+2-TRAP,(6);GET DATA AND MAKE IT AN OFFSET
.TRP:   MOV      0(6)+,PC    ;GO TO PROPER SUBROUTINE
```

```
.SCOPE      ;SCOPE      = TRAP+0      (104400)
.TYPE       ;TYPE       = TRAP+2      (104402)
.TYPE0     ;TYPE0     = TRAP+4      (104404)
.TYPES     ;TYPES     = TRAP+6      (104406)
.TYPED     ;TYPED     = TRAP+10     (104410)
.TYPEA     ;TYPEA     = TRAP+12     (104412)
.ERCLR     ;ERCLR     = TRAP+14     (104414)
.DKCMD     ;DKCMD     = TRAP+16     (104416)
.RDOCT     ;RDOCT     = TRAP+20     (104420)
.RDLIN     ;RDLIN     = TRAP+22     (104422)
.UPDAT     ;UPDAT     = TRAP+24     (104424)
.CLRDV     ;CLRDV     = TRAP+26     (104426)
.LOGM      ;LOGM      = TRAP+30     (104430)
.LOGR      ;LOGR      = TRAP+32     (104432)
.LOGMC     ;LOGMC     = TRAP+34     (104434)
.LOGC      ;LOGC      = TRAP+36     (104436)
.CNTLU     ;CNTLU     = TRAP+40     (104440)
.KBDIN     ;KBDIN     = TRAP+42     (104442)
.SUSWR     ;SUSWR     = TRAP+44     (104444)
```

```

2443          .SBTTL          BRDLIN - TTY INPUT ROUTINE
2444
2445          ;THIS ROUTINE INPUTS A LINE TERMINATED BY A RETURN INTO ADDRESS
2446          ;INPUT AND RETURNS A LINE FEED. THE BUFFER HAS A NULL TERMINATOR
2447          ;INSTEAD OF THE RETURN, RUBOUTS ARE HANDLED BY RETYPING
2448          ;THE LINE. BUFFER OVERFLOW ERRORS LIKE A RUBOUT.
2449
2450 016710 010546          .RDLIN: MOV      R5,-(6)          ;SAVE R5
2451 016712 012705 017032 10:      MOV      @INPUT,R5          ;GET ADDRESS
2452 016716 022705 017052 20:      CMP      @INPUT+16,,R5          ;BUFFER FULL?
2453 016722 001423          BEQ      40          ;YES - TYPE "?"
2454 016724 105737 177560          TSTB   @0177560          ;WAIT FOR
2455 016730 100375          BPL     .-4          ;A CHARACTER
2456 016732 113715 177562          MOVB   @0177562,(5)          ;GET CHARACTER
2457 016736 142715 000200          BICB   @200,(5)          ;GET RID OF JUNK
2458 016742 122715 000025          CNPB   @25,(5)          ;IS IT A "U
2459 016746 001006          BNE     50          ;BRANCH IF NOT
2460 016750 104402 016754          TYPE   ,.+2          ;.ASCIZ "U"<15><12>
2461 016762 000753          BR      10          ;START OVER
2462 016764 122715 000177          50:    CNPB   @177,(5)          ;IS IT A RUBOUT
2463 016770 001005          BNE     30          ;SKIP IF NOT
2464 016772          40:
2465 016772 104402 016776          TYPE   ,.+2          ;.ASCIZ "?"<15><12>
2466 017002 000743          BR      10          ;ZAP THE BUFFER AND LOOP
2467 017004 111527 000000          30:    MOVB   (5),@0          ;SET UP FOR TYPING
2468 017010 104402 017006          TYPE   ,30+2          ;ECHO IT
2469 017014 122725 000015          CNPB   @15,(5)+          ;CHECK FOR RETURN
2470 017020 001336          BNE     20          ;LOOP IF NOT RETURN
2471 017022 104402 000012          TYPE   ,12          ;TYPE A LINE FEED
2472 017026 012605          MOV     (6)+,R5          ;RESTORE R5
2473 017030 000002          RTI
2474
2475 017032 000020          INPUT: .BLKB 16.          ;TTY INPUT AREA
2476 017052 000020          ERT/0: .BLKW 16.
2477
2478 017112 005737 000042          .KBDIN: TST      42          ;GOT XXDP OR ACT
2479 017116 001057          BNE OKT          ;YES,GET OUT
2480 017120 022737 000176 001026          CMP      @BUREG,BUR          ;GOT SWITCH-LESS MACHINE?
2481 017126 001053          BNE OKT          ;NO GET OUT
2482 017130 105777 161664          TSTB   @TKB          ;HAVE A CHARACTER
2483 017134 100050          BPL     OKT          ;NO GET OUT
2484 017136 017737 161660 017260          MOV     @TKB,,MSG          ;STRIP OFF GARBAGE
2485 017144 042737 177600 017260          BIC     @177600,,MSG          ;DO WE HAVE A "G
2486 017152 122737 000007 017260          CNPB   @7,,MSG          ;NO,GET OUT
2487 017160 001036          BNE OKT          ;.ASCIZ <15><12>"G"
2488 017162 104402 017166          TYPE   ,.+2
2489 017174          .CNTLUI:
2490 017174 104402 017200          TYPE   ,.+2          ;.ASCIZ <15><12>"BUR"
2491 017210 013746 000176          MOV     BUR,-(6)          ;PUT BUREG ON STACK
2492 017214 104404          TYPEO          ;TYPE STACK IN OCTAL
2493 017216 104402 017222          TYPE   ,.+2          ;.ASCIZ "  NEW"
2494 017234 104420          RDOCT
2495 017236 012637 017260          MOV     (BP)+,,MSG          ;GET NEW VALUE OFF STACK
2496 017242 005737 017262          TST     CTN          ;DID HE TYPE <CR> OF 000000?
2497 017246 001403          BEQ     OKT          ;DONT CHANGE IF <CR>
2498 017250 013737 017260 000176          MOV     .MSG,BUREG          ;CHANGE VALUE OF BUREG

```

2499 017256 000002
 2500
 2501 017260 000000
 2502 017262 000000
 2503
 2504

OKT: RTI ;ALL DONE-EXIT
 .MSG: 0
 CTN: 0
 .SBTTL BRDOCT - OCTAL INPUT ROUTINE

2505
 2506
 2507

;THIS ROUTINE CALLS RDLIN, INPUTS A LINE FROM THE TTY AND CONVERTS
 ;IT INTO AN OCTAL NUMBER WHICH IS THE FIRST WORD ON THE STACK.

2508 017264 011646
 2509 017266 016666 000004 000002
 2510 017274 010146
 2511 017276 010246
 2512 017300 010346
 2513 017302 104422
 2514 017304 005001
 2515 017306 005037 017262
 2516 017312 012703 017032
 2517 017316 112302
 2518 017320 122702 000015
 2519 017324 001421
 2520 017326 122702 000060
 2521 017332 003024
 2522 017334 122702 000067
 2523 017340 002421
 2524 017342 006002
 2525 017344 006002
 2526 017346 006002
 2527 017350 006101
 2528 017352 006102
 2529 017354 006101
 2530 017356 006102
 2531 017360 006101
 2532 017362 005237 017262
 2533 017366 000753
 2534 017370 010166 000012
 2535 017374 012603
 2536 017376 012602
 2537 017400 012601
 2538 017402 000002
 2539

```

.RDOCT: MOV      (6),-(6)      ;MOVE THE PC
        MOV      4(6),2(6)    ;MOVE THE PS
        MOV      R1,-(6)      ;PUSH R1 ON STACK
        MOV      R2,-(6)      ;PUSH R2 ON STACK
        MOV      R3,-(6)      ;PUSH R3 ON STACK
40:     RDLIN                    ;READ A LINE INTO INPUT
        CLR      R1            ;INIT DATA WORD
        CLR      CTN          ;CLEAR COUNT WORD
        MOV      0INPUT,R3    ;INIT POINTER
10:     MOV      (3)+,R2       ;GET A BYTE
        CMPB    010,R2        ;WAS IT A ,CR?
        BEQ     20            ;GET OUT IF YES
        CMPB    0'0,R2        ;CHECK FOR 0 OR GREATER
        BGT     30            ;ERROR - LESS THAN 0
        CMPB    0'7,R2        ;CHECK FOR 7 OR LESS
        BLT     30            ;ERROR - GREATER THAN 7
        ROR     R2            ;GET
        ROR     R2            ;INTO
        ROR     R2            ;POSITION
        ROL     R1            ;FIRST BIT
        ROL     R2            ;GET
        ROL     R1            ;SECOND BIT
        ROL     R2            ;GET
        ROL     R1            ;THIRD BIT
        INC     CTN          ;YES HE TYPED SOMETHING
        BR      10           ;LOOP
20:     MOV      R1,12(6)     ;SAVE THE RESULT
        MOV      (6)+,R3     ;POP STACK INTO R3
        MOV      (6)+,R2     ;POP STACK INTO R2
        MOV      (6)+,R1     ;POP STACK INTO R1
        RTI                    ;RETURN
30:
        TYPE    ,,+2        ;.ASCII '0'<15><12>
        BR      40          ;TRY AGAIN
  
```

2540 017404
 2541 017404 104402 017410
 2542 017414 000732
 2543 017416 000000
 2544
 2545

OUTBUF: 0
 ;NOTE FOR PROGRAMMER***** PROGRAM AT THIS POINT CAN NOT EXCEED A PC OF 174660000

```

2546          020000          .S 20000
2547          ;NOTE ALL THIS CODE GETS DESTROYED WHEN PATTERN IS WRITTEN
2548
2549 020000 032737 000001 020116 .SUSWR: BIT 0BIT0,SWI
2550 020006 001037          BNE XXX
2551 020010 013746 000006          MOV 6,-(SP) ;SAVE 6 ON STACK
2552 020014 013746 000004          MOV 4,-(SP) ;SAVE 4 ON STACK
2553 020020 012737 020040 000004          MOV 010,4 ;SET UP TRAP ADDRESS
2554 020026 022777 177777 160772          CMP 0-1,0SWR ;TEST 177570
2555 020034 001402          BEQ 20 ;FAKE OUT
2556 020036 000407          BR 30 ;HARDWARE AVAILABLE
2557 020040 022626          10: CMP (SP)+,(SP)+ ;ADJUST STACK
2558 020042 012737 000176 001026 20: MOV 0SWREG,SWR ;SET UP SOFTWARE REGISTERS
2559 020050 012737 000174 001030          MOV 0DISPREG,DISPLAY
2560 020056 022737 000176 001026 30: CMP 0SWREG,SWR ;1ST TIME THRU
2561 020064 001004          BNE 40 ;NO CHANGE STILL 177570
2562 020066 005737 000042          TST 42 ;ANY XDP OR ACT
2563 020072 001001          BNE 40 ;SWR000000
2564 020074 104440          CNTLU ;GET INITIAL SETTINGS
2565 020076 012637 000004          40: MOV (SP)+,4 ;REPLACE 4 FROM STACK
2566 020102 012637 000006          MOV (SP)+,6 ;REPLACE 6 FROM STACK
2567 020106 052737 000001 020116 XXX: BIS 0BIT0,SWI ;SET THE BEENHEREBIT
2568 020114 000002          RTI ;ALL DONE
2569
2570 020116 000000          SWI: 0
2571
2572
2573
2574          ;ROUTINE TO SAVE ASS LOADER
2575 020120 012700 017776          LDR: MOV 017776,R0
2576 020124 012737 020144 000004          MOV 020,4 ;SET TIME OUT TRAP VECTOR
2577 020132 012737 000340 000006          MOV 0340,6
2578 020140 005720          TST (R0)+
2579 020142 000776          BR 20
2580 020144 022626          20: CMP (SP)+,(SP)+
2581 020146 012737 000006 000004          MOV 06,4
2582 020154 005037 000006          CLR 6
2583 020160 162700 000334          SUB 0334,R0 ;POINT R0 BACK TO LOADER
2584 020164 010037 015200          MOV R0,LDR1 ;SAVE FOR RESTORE ROUTINE
2585 020170 012702 000155          MOV 0155,R2 ;WORD COUNT
2586 020174 012703 017446          MOV 017446,R3 ;WHERE LOADER IS TO BE STORED
2587 020200 012023          10: MOV (R0)+,(R3)+ ;STORE LOADER
2588 020202 005302          DEC R2
2589 020204 001375          BNE 10
2590 020206 000207          RTS PC ;RETURN
2591
2592
2593          ; -A- PORT SIZE
2594
2595 020210 052737 020000 001122 SIZZAP: BIS 0BIT13,FLAG2 ;SET MAPPING BIT
2596 020216 004737 001624          JBR PC,DRVEN0 ;FIND DRIVE
2597 020222 012737 000002 001224          MOV 02,WORX1 ;START WITH ONE 4K BUFFER
2598 020230 012737 000001 001070          MOV 01,STANEM ;FIRST 4K BANK
2599 020236 012737 057476 001140          MOV 057476,BUF ;GET STARTING ADDR. BK
2600 020244 012737 000001 001130          MOV 01,WRDCT ;LOAD WC
2601 020252 005037 001134          CLR DNA ;LOAD DA

```

2602	020256	012777	000040	160550		MOV	040,0RSCB2	;CLEAR ALL R8 REG
2603	020264	013777	001160	160542		MOV	UNNUM,0RSCB2	;GET DRIVE 0
2604	020272	012737	000071	001172		MOV	071,CMD	;DO A READ
2605	020300	104416			40:	DKCMD		;NOW
2606	020302	105777	160524		10:	TSTB	0RSCB1	;DONE YET?
2607	020306	100375				BPL	10	;NO
2608	020310	032777	004000	160516		BIT	04000,0RSCB2	;DID MEM SET?
2609	020316	001012				BNE	0121	;YES
2610	020320	005777	160506			TST	0RSCB1	;ANY ERRORS?
2611	020324	100005				BPL	10	;NO
2612	020326	012737	000006	001106		MOV	06,SIZEAP	;GET SIZE OF BUFFER
2613	020334	000137	020526			JMP	008IZERR	;FOR USER IF HE WISHES IT
2614	020340	104424			30:	UPDAT		;GET NEXT 4K BANK
2615	020342	000756				BR	40	;TEST BANK
2616	020344	005337	001224		0121:	DEC	WORK1	;DEC SIZE OF BUFFER
2617	020350	013737	001224	001106		MOV	WORK1,SIZEAP	;LOAD SIZE OF A BUFFER
2618	020356	104402	020362			TYPE	,,+2	;.ASCII <15><12> "PORT -A- DATA BUFFER
2619	020424	004737	021132			JSR	PC,SIZEPR	4K TO "

```

2620          ; -B- PORT SIZE
2621
2622 020430 012737 000001 001224 SIZEBP: NOV 01,WORK1 ;START WITH ONE 4K BUFFER
2623 020436 012737 037476 001140          NOV 037476,BUF ;GET STARTING ADDR. 4K
2624 020444 012737 000001 001130          NOV 01,WRDCT ;LOAD WC
2625 020452 000037 001134          CLR DWA ;LOAD DA
2626 020456 012777 000040 160350          NOV 040,ORCS2 ;CLEAR ALL RS REG
2627 020464 013777 001160 160342          NOV UNNUM,ORCS2 ;GET DRIVE 0
2628 020472 012737 002071 001172          NOV 02071,CMD ;DO A READ
2629 020500 104416          SIZE1: DKCMD ;NOW
2630 020502 103777 160324 100          TSTB 0RCS1 ;DONE YET?
2631 020506 100375          BPL 10 ;NO
2632 020510 032777 004000 160316          BIT 04000,ORCS2 ;DID MEN SET?
2633 020516 001072          BNE SIZE1 ;YES
2634 020520 000777 160306          TST 0RCS1 ;ANY ERRORS?
2635 020524 100047          BPL SIZE1 ;NO
2636 020526          SIZEERR:
2637 020526 104402 020532          TYPE 0,02 ;,ACTS <10><12> WILL NOT CONTINUE TO SIZE MEMORY BECAUS
2638 020616 012737 000006 001110          NOV 06,SIZEBP ;GIVE PROGRAM A BUFFER
2639 020624 104060          HLT 10A10 ;YOU CAN ENTER CONVERSATION MODE
2640 020626 052737 000001 001122          BIS 0BIT0,FLAG2 ;BEEN HERE BEFORE FLAG
2641 020634 042737 020000 001122          BIS 0BIT13,FLAG2 ;CLEAR MAPPING FLAG
2642 020642 000000          HALT ;OR GO TO DERAD
2643 020644 032737 000400 001122 SIZE3: BIT 0BIT0,FLAG2 ;FOUND MEMORY YET?
2644 020652 001011          BNE SIZE3 ;YES
2645 020654 052737 000400 001122          BIS 0BIT0,FLAG2 ;SET FOUND MEN FLAG
2646 020662 013737 001224 001074          NOV WORK1,STDCOM ;GET 1ST BANK
2647 020670 012737 000001 001224          NOV 01,WORK1
  
```


2704	021244	010546			MOV	R5,-(6)	;PUSH R5 ON STACK
2705	021246	012737	100040	021454	MOV	0100040,,DSIGN	;SET BLANK SWITCH AND SIGN
2706	021254	016605	000016		MOV	16(6),R5	;GET DATA TO BE TYPED
2707	021260	100004			BPL	10	;BR IF INPUT IS POS.
2708	021262	005405			NEG	R5	;MAKE THE BINARY NUMBER POS.
2709	021264	112737	000055	021454	MOVB	0'-,,DSIGN	;MAKE THE ASCII NUMBER NEG.
2710	021272	005000		101	CLR	R0	;ZERO THE CONSTANTS INDEX
2711	021274	012703	021444		MOV	0,DBLK,R3	;SETUP THE OUTPUT POINTER
2712	021300	112723	000040		MOVB	0',(R3)+	;SET THE FIRST CHARACTER TO A BLANK
2713	021304	005002		201	CLR	R2	;CLEAR THE BCD NUMBER
2714	021306	016001	021434		MOV	,DTBL(R0),R1	;GET THE CONSTANT
2715	021312	160105		301	SUB	R1,R5	;FORM THIS BCD DIGIT
2716	021314	002402			BLT	40	;BR IF DONE
2717	021316	005202			INC	R2	;INCREASE THE BCD DIGIT BY 1
2718	021320	000774			BP	30	
2719	021322	060105		401	ADD	R1,R5	;ADD BACK THE CONSTANT
2720	021324	005702			TST	R2	;CHECK IF BCD DIGIT=0
2721	021326	001003			BNE	50	;FALL THROUGH IF 0
2722	021330	105737	021455		TSTB	,DSIGN+1	;STILL DOING LEADING 0'S?
2723	021334	100410			BMI	70	;BR IF YES
2724	021336	106337	021455	501	ASLB	,DSIGN+1	;MSD?
2725	021342	103003			BCC	60	;BR IF NO
2726	021344	113763	021454	177777	MOVB	,DSIGN,-1(R3)	;YES--SET THE SIGN
2727	021352	052702	000060	601	BIS	0'0,R2	;MAKE THE BCD DIGIT ASCII
2728	021356	052702	000040	701	BIS	0',R2	;MAKE IT A SPACE IF NOT ALREADY A DIGIT
2729	021362	110223			MOVB	R2,(R3)+	;PUT THIS CHARACTER IN THE OUTPUT BUFFER
2730	021364	005720			TST	(R0)+	;JUST INCREMENTING
2731	021366	020027	000010		CMP	R0,010	;CHECK THE TABLE INDEX
2732	021372	002744			BLT	20	;GO DO THE NEXT DIGIT
2733	021374	003002			BGT	00	;GO TO EXIT
2734	021376	010502			MOV	R5,R2	;GET THE LSD
2735	021400	000764			BR	60	;GO CHANGE TO ASCII
2736	021402	105013		001	CLRB	(R3)	;SET THE TERMINATOR
2737	021404	012605			MOV	(6)+,R5	;POP STACK INTO R5
2738	021406	012603			MOV	(6)+,R3	;POP STACK INTO R3
2739	021410	012602			MOV	(6)+,R2	;POP STACK INTO R2
2740	021412	012601			MOV	(6)+,R1	;POP STACK INTO R1
2741	021414	012600			MOV	(6)+,R0	;POP STACK INTO R0
2742	021416	016666	000002	000004	MOV	2(6),4(6)	;FUDGE DATA
2743	021424	012616			MOV	(6)+,(6)	;OFF STACK
2744	021426	104402	021444		TYPE	,DBLK	;NOW TYPE THE NUMBER
2745	021432	000002			RTI		;RETURN
2746							
2747	021434	023420	001750	000144	.DTBL:	10000,,1000,,100,,10.	
2748	021442	000012					
2749	021444	000004			.DBLK:	.BLKW 4	
2750	021454	000000			.DSIGN:	0	
2751							
2752		000001				.END	

ADAM	010676	CMDAE	007334	FLAG2	001122	LDR	020120	PAT17	000312
ADDR	014144	CNPLP	010866	FLAG3	001216	LDR1	018200	PAT2	000260
ADERR	003624	CNPLP1	010632	FNDTYP	006540	LOADSW	000510	PAT20	000314
ADHGT	003562	CMPY	003300	GETERR	014012	LOGC	104436	PAT3	000262
ADDR	004732	CNTLU	104440	GOOD	0000001	LOGR	104432	PAT4	000264
ADRI	004746	CONDAR	007340	HINUM	010206	LOGM	104430	PAT5	000266
ADTL	003316	CONERR	001210	HINUM1	010350	LOGMC	104434	PAT6	000270
ADTST	003224	COMPAR	010446	HISAV	010212	LONUM	010204	PAT7	000272
ADT1	003324	CONN	002220	HLT	104000	LONUM1	010346	PC	0000007
ADT1A	003326	CRLPLP	000636	HLTADR	001012	LOPCNT	001200	PCNT	001004
AKH	007352	CTN	017362	HRDR	001182	LOSAY	010210	PDOWN	000742
APORT	011350	DA	000004	ICNT	001000	MDON	012304	PFT1	013466
AS	000100	DATA	000954	INCSEC	007214	MEN	010352	PFT2	013014
ASKWC	002544	DATAT	003710	INPUT	017032	MHABTS	012306	PFNAT	012522
ASD1	001114	DATTES	002454	INTEXT	006444	MHAYA	001212	PFNATT	012514
A1	002374	DB	000002	INTFLG	001176	MHSET	011376	PHADDR	001120
BA	000020	DISBUF	007050	KBDIN	104442	MHVEC	000250	PHYCOV	006626
BAD	000000	DISPLA	001030	KDPAR0	172360	MR	000220	POWFAL	013272
BEGIN	001234	DISPRE	000174	KDPAR1	172362	MSTR	004754	PRIORI	001066
BELL	000007	DKCMD	104416	KDPAR2	172364	NYBYNR	012542	PRNT	014204
BIT0	000001	DKINT	000354	KDPAR3	172366	N	000005	PS	177776
BIT1	000002	DNA	001134	KDPAR4	172370	NOPORT	002362	PSW	177776
BIT10	002000	DONE	014044	KDPAR5	172372	NOREC	006520	PTDONE	014720
BIT11	004000	DONEE	002204	KDPAR6	172374	NONCO	002210	PURDN	013222
BIT12	010000	DOWN	012750	KDPAR7	172376	NPRCNT	012426	PURFL	013052
BIT13	020000	DROP	001124	KDPAR8	172320	NPRRET	012410	PURFL2	013042
BIT14	040000	DRP	014772	KDPDR1	172322	NPR1	012430	PURF1	013050
BIT15	100000	DRVENO	001624	KDPDR2	172324	NUM8	001170	PURUP	013222
BIT2	000004	DS	000040	KDPDR3	172326	OKT	017256	QG	000001
BIT3	000010	DSKRD	004570	KDPDR4	172330	OPDAR	002710	RAND	010240
BIT4	000020	DT	000240	KDPDR5	172332	OPDSEL	006500	RANDM	000716
BIT5	000040	DYNUN	001664	KDPDR6	172334	OPPAT	003020	RANDOM	010040
BIT6	000100	ELN	004034	KDPDR7	172336	OPRD	003142	RAND1	010044
BIT7	000200	ENCLR	104414	KIPAR0	172340	OPNCK	003172	RANEL	000000
BIT8	000400	ERCOUN	001140	KIPAR1	172342	OPWRT	003112	RANEX	000000
BIT9	001000	ERRCL	012422	KIPAR2	172344	OUT	013446	RDERR	000007
BLOCK	001154	ERRORS	001002	KIPAR3	172346	OUTP	017410	RDLIN	010001
BLSE	007556	ERTAB	017052	KIPAR4	172350	PARCAR	172100	RDOCT	104000
BPORT	011416	ESH	004024	KIPAR5	172352	PAREER	000760	RDRCT	000000
BUF	001140	ESH1	004020	KIPAR6	172354	PARVEC	000114	REACT	000000
BUFEXI	007342	EXGEN	010200	KIPAR7	172356	PASBL	007716	READER	001000
BUFINX	007426	EXGEN1	010244	KIPDR0	172300	PASEX	010024	RECOV	000000
BUFSIZ	000674	EXPLG	003240	KIPDR1	172302	PASAC	001156	RESTOR	010214
CALM	001474	EXRAX	006010	KIPDR2	172304	PATNU	001136	RETT	010002
CALM1	001500	EXRXI	006022	KIPDR3	172306	PAT0	000254	RLDR	010004
CHKDV	002150	EXTDR	007054	KIPDR4	172310	PAT1	000256	ROBLK	007640
CHKADT	003650	EXTWEN	011472	KIPDR5	172312	PAT10	000274	RNDSEC	003016
CHKDAT	012626	EXTPR	000114	KIPDR6	172314	PAT11	000276	RREAD	000002
CHKDSK	013072	EXTPR2	006066	KIPDR7	172316	PAT12	000300	RRR2	011730
CLEAR	011302	EXTT	011414	LA	000204	PAT13	000302	REAS	001050
CLIND	014112	FILCHR	001014	LAD	001010	PAT14	000304	RBA	001040
CLRDV	104426	FILDAT	010014	LDAT	004022	PAT15	000306	RCS1	001022
CMD	001172	FLAG	001126	LDAT1	004016	PAT16	000310	RCS2	001024

RSDA	001042	SIXERR	020526
RSDB	001054	SIXP	021140
RSDS	001044	SIXPR	021132
RSDT	001060	SIXEAP	020210
RSER	001046	SIXZBP	020430
RSLA	001052	SIXI	020344
RSMP	001056	SIXZ	020500
RSREG	014214	SIX3	020644
RSVEC	001062	SLN	004174
RSWC	001036	SLN2	004176
RS04DT	001166	SLN2A	004564
RW	000006	SP	0000006
RWRED	005706	SR0	177572
R0	0000000	SR1	177574
R1	0000001	SR2	177576
R2	0000002	SR3	172516
R3	0000003	STABUF	000493
R4	0000004	STAMEN	001070
R5	0000005	STATUS	001064
SANHT	003606	STBCON	001074
SAVAST	001072	STNMS	012020
SAVCPU	001076	STTEST	001736
SAVE	001150	SUSWR	104444
SAVMGA	001100	SWI	020116
SAVMGB	001102	SWITCH	001174
SAVMGC	001104	SWR	001026
SAVMC	001214	SWRDCY	001144
SAVMCB	001220	SWREG	000176
SCOPE	104400	SW0	000001
SEABUF	003420	SW1	000002
SEEC	014602	SW10	002000
SETIND	014130	SW11	004000
SETSWI	001230	SW12	010000
SHIFT	010072	SW13	020000
SHIFT1	010256	SW14	040000
SIZB1	020704	SW15	100000
SIZB2	020714	SW2	000004
SIZB3	020676	SW3	000010
SIZEAP	001106	SW4	000020
SIZEBP	001110	SW5	000040
.	021456		

SW6	000100
SW7	000200
SW8	000400
SW9	001000
TAG	004630
TAG1	005702
TDNA	001142
TIMES	015714
TINUP	007012
TK0	001022
TK5	001020
TPB	001034
TPS	001016
TRACK	001132
TRUERR	004436
TRY	001044
TRYX	002134
TSTNG	000730
TST1	003324
TST2	003710
TST3	005050
TST4	006064
TYPE	104402
TYPEA	104412
TYPEP	104446
TYPEO	104404
YPES	104406
TYPREC	011772
UNCMP	001164
UNITST	001162
UNWUN	001160
UNRECO	000322
UNYTP	001746
UP	000000
UPCHK	012612
UPDAT	104424
UPP	012760
YADDR	001116
VECTRR	006774
WATT	011750

WC	000010
WCCON	002600
WCERR	001204
WCKERR	000574
WDCTB	001112
WDERR	010706
WHTHU	006502
WORK	001222
WORK1	001224
WORK2	001226
WRDCMP	010642
WRDCT	001130
WRDINC	010650
WRDNW	013366
WRERR	005270
WRITER	001202
WRLG1	005166
WRXKB	003506
WRACK	000430
WRACK1	005410
WRTEAR	000564
WRXBL	004160
WRX1	004162
WTNO	011454
XEAM	004242
XINCSE	007436
XINCSE	007462
XSEASU	003432
XWAIT	012312
XXX	020106
YORN	000641
SENDAD	014070
SEND1	014100
.CLRDV	000316
.CNTLU	017174
.DBLK	021444
.DKCHD	006142
.DSIGN	021454
.DTBL	021434
.ENCLR	006120

.HLT	015716
.HLTCT	010040
.ILLUP	016402
.KBDIN	017112
.KIT	015666
.LOGC	014136
.LOGR	014116
.LOGN	014106
.LOGWC	014124
.MANK	015202
.MAG	017200
.OPDR	000035
.OVER	015672
.PARSR	015274
.POWER	016354
.POWUP	016320
.PR	016230
.PRF	016136
.PRL	016114
.PRTT	016074
.PUVEC	016410
.QQ	000050
.RDLIN	016710
.RDOCT	017244
.SATAB	016612
.SAVRS	016406
.SCOPE	015542
.SUSWR	020000
.SVLAD	015646
.SNOPT	121000
.TBIT	014104
.TRAP	016022
.TRP	016046
.TYPE	015604
.TYPEA	016414
.TYPEB	016042
.TYPEP	021224
.TYPEO	016002
.YPES	016002
.UPDAT	021172

ERRORS DETECTED: 0
DEFAULT GLOBALS GENERATED: 0

*,RSCE/SOL_DERSCE.P11
RUN-TIME: 22 22 1 SECONDS
RUN-TIME RATIO: 07/4601.0
CORE USED: 12K (23 PAGES)