

PDP-11 FORTRAN-77

Installation Guide/Release Notes

Order No. AA-K503B-TC

September 1981

This guide describes the procedures for installing PDP-11 FORTRAN-77 on the RSX-11M/M-PLUS, RSTS/E, and IAS operating systems.

SUPERSESSION/UPDATE INFORMATION: This document supersedes the *FORTRAN IV-PLUS Installation Guide*, Order No. AA-1873D-TC

OPERATING SYSTEM AND VERSION: RSX-11M V3.2
RSX-11M-PLUS V1.0
IAS V3.1

SOFTWARE VERSION: FORTRAN-77 V4.0

First Printing, March 1975
Revised, December 1975
Revised, January 1977
Revised, December 1979
Revised, September 1981

The information in this document is subject to change without notice and should not be construed as a commitment by Digital Equipment Corporation. Digital Equipment Corporation assumes no responsibility for any errors that may appear in this document.

The software described in this document is furnished under a license and may be used or copied only in accordance with the terms of such license.

No responsibility is assumed for the use or reliability of software on equipment that is not supplied by DIGITAL or its affiliated companies.

Copyright © 1975, 1977, 1979, 1981 by Digital Equipment Corporation
All Rights Reserved.

Printed in U.S.A.

The postage-paid READER'S COMMENTS form on the last page of this document requests the user's critical evaluation to assist us in preparing future documentation.

The following are trademarks of Digital Equipment Corporation:

DEC	DECsystem-10	PDT
DECUS	DECSYSTEM-20	RSTS
DIGITAL	DECwriter	RSX
PDP	DIBOL	VMS
UNIBUS	Edusystem	VT
VAX	IAS	digital
DECnet	MASSBUS	

ZK2034-81

CONTENTS

	Page
PREFACE	vii
CHAPTER 1	INTRODUCTION
1.1	SYSTEM REQUIREMENTS 1-1
1.1.1	RSX-11M 1-1
1.1.2	RSX-11M-PLUS 1-2
1.1.3	RSTS/E 1-2
1.1.4	IAS 1-2
1.2	DISTRIBUTION FILES 1-3
1.2.1	UFD [1,2] 1-3
1.2.2	UFD [11,36] 1-3
1.2.3	UFD [11,37] 1-3
1.2.4	UFD [11,40] 1-4
CHAPTER 2	INSTALLATION PLANNING
2.1	SELECTING THE DEFAULT FORTRAN 2-1
2.1.1	Selecting F77 as the Default FORTRAN 2-1
2.1.2	Selecting FOR as the Default FORTRAN 2-2
2.2	SELECTING F77 COMPILER OPTIONS 2-2
2.3	SELECTING F77 OTS OPTIONS 2-2
2.4	PRELIMINARY INSTALLATION PROCEDURES 2-3
2.4.1	RSX-11M/M-PLUS 2-4
2.4.2	RSTS/E 2-5
2.4.3	IAS using MCR or DCL 2-5
2.5	MAKING THE COMPILER TASK AVAILABLE 2-5
2.5.1	RSX-11M/M-PLUS 2-5
2.5.2	RSTS/E 2-6
2.5.3	IAS using MCR 2-6
2.5.4	IAS using DCL 2-6
CHAPTER 3	SYSTEM TAILORING
3.1	OPTIONS AFFECTING COMPILE-TIME PERFORMANCE 3-1
3.1.1	Additional Temporary Files 3-1
3.1.2	Selecting the Size of the Dynamic Storage Area 3-2
3.1.2.1	Operating Systems Supporting Dynamic Memory Allocation 3-2
3.1.2.2	RSX-11M Without Dynamic Memory Allocation 3-4
3.2	OTS OPTIONS 3-4
3.2.1	F4P11S 3-4
3.2.2	Short Error Text - RSX-11M/M-PLUS and RSTS/E Only 3-5
3.2.3	F4PMAP 3-6
3.2.4	F4PEIS 3-7
3.2.5	F4PCVF 3-7
3.2.6	F4PNER 3-8

CONTENTS

Page

3.2.7	F4PNIO	3-8
3.2.8	F4PRAN	3-8
3.2.9	F4PRES	3-8
3.2.10	OTS Overlay Description Files	3-8

CHAPTER 4 RSX-11M/M-PLUS INSTALLATION

4.1	INSTALLATION FROM MAGNETIC TAPE DISTRIBUTION . . .	4-1
4.1.1	Preparations	4-1
4.1.2	Building the Compiler	4-2
4.1.3	Building the OTS	4-2
4.1.4	Copying the Message File	4-3
4.2	INSTALLATION FROM DISK CARTRIDGE DISTRIBUTION . .	4-3
4.2.1	Preparations	4-3
4.2.2	Building the Compiler	4-4
4.2.3	Building the OTS	4-4
4.2.4	Copying the Message File	4-5
4.3	INVOKING THE COMPILER	4-5

CHAPTER 5 RSTS/E INSTALLATION

5.1	MOUNTING (AND COPYING) THE AUTOPATCH KIT	5-1
5.1.1	Mounting and Copying a Magnetic-Tape Kit	5-1
5.1.2	Mounting (and Copying) a Disk Kit	5-2
5.2	MOUNTING THE F77 DISTRIBUTION KIT	5-2
5.3	BUILDING THE COMPILER AND THE OTS	5-2

CHAPTER 6 INSTALLATION ON IAS USING MCR

6.1	INSTALLATION FROM MAGNETIC TAPE DISTRIBUTION . . .	6-1
6.1.1	Preparations	6-1
6.1.2	Building the Compiler	6-2
6.1.3	Building the OTS	6-2
6.1.4	Copying the Message Files	6-3
6.2	INSTALLATION FROM DISK CARTRIDGE DISTRIBUTION . .	6-3
6.2.1	Preparations	6-3
6.2.2	Building the Compiler	6-3
6.2.3	Building the OTS	6-4
6.2.4	Copying the Message Files	6-4
6.3	INVOKING THE COMPILER	6-5

CHAPTER 7 INSTALLATION ON IAS USING DCL

7.1	INSTALLATION FROM MAGNETIC TAPE DISTRIBUTION . . .	7-1
7.1.1	Preparations	7-1
7.1.2	Building the Compiler	7-2
7.1.3	Building the OTS	7-2
7.1.4	Copying the Message Files	7-3
7.2	INSTALLATION FROM DISK CARTRIDGE DISTRIBUTION . .	7-3
7.2.1	Preparations	7-3
7.2.2	Building the Compiler	7-4
7.2.3	Building the OTS	7-4
7.2.4	Copying the Message Files	7-5
7.3	INVOKING THE COMPILER	7-5

CONTENTS

Page

CHAPTER 8	SYSTEM BUILD VERIFICATION	
8.1	TEST PROGRAM	8-1
8.2	TEST RESULTS	8-2
8.3	VERIFICATION PROCEDURE FAILURE	8-2
CHAPTER 9	RELEASE NOTES	
9.1	USING F4PNER WITH F4P11S OR F4PNIO	9-1
9.2	INCORRECT FATAL 03 ERROR	9-1
9.3	TASK SIZE INCREASES	9-2
9.4	RESTRICTION ON OUTPUT OF 0	9-2
9.5	F77 OTS INSTALLATION	9-2
APPENDIX A	ALTERNATIVE RSTS/E INSTALLATION	
A.1	INSTALLATION FROM MAGNETIC TAPE DISTRIBUTION . . .	A-1
A.1.1	Preparations	A-1
A.1.2	Building the Compiler	A-2
A.1.3	Building the OTS	A-2
A.1.4	Copying the Message File	A-3
A.2	INSTALLATION FROM DISK CARTRIDGE DISTRIBUTION . .	A-3
A.2.1	Preparations	A-4
A.2.2	Building the Compiler	A-4
A.2.3	Building the OTS	A-4
A.2.4	Copying the Message File	A-6
A.3	INVOKING THE COMPILER	A-6
APPENDIX B	COMPILER TASK-BUILD FILES	
B.1	PDP-11 FORTRAN-77 COMPILER TASK-BUILD FILE FOR RSX-11M/M-PLUS (F7711M.CMD)	B-1
B.2	PDP-11 FORTRAN-77 COMPILER TASK-BUILD FILE FOR RSTS/E (F77RST.CMD)	B-4
B.3	PDP-11 FORTRAN-77 COMPILER TASK BUILD FILE FOR IAS USING MCR (F7711D.CMD)	B-7
B.4	PDP-11 FORTRAN-77 COMPILER TASK BUILD FILE FOR IAS USING DCL (F77IAS.CMD)	B-10

FIGURES

FIGURE 3-1	Compiler Performance	3-3
------------	--------------------------------	-----

PREFACE

MANUAL OBJECTIVES

This manual describes the procedures used to install PDP-11 FORTRAN-77 on any PDP-11 system under an RSX-11M, RSX-11M-PLUS, RSTS/E, or IAS operating system, from magnetic-tape or disk-cartridge distribution kits. PDP-11 FORTRAN-77 can operate on any PDP-11 processor with a Floating-Point Processor (FP11) or floating-point microcode option.

INTENDED AUDIENCE

This manual is intended for the PDP-11 system manager. The reader should be thoroughly familiar with the host operating system before installing the PDP-11 FORTRAN-77 software.

STRUCTURE OF THIS DOCUMENT

This manual is organized as follows:

- Chapter 1 presents the minimum system requirements for PDP-11 FORTRAN-77 installation on each of the host operating systems and lists the software files supplied in the distribution kits.
- Chapter 2 presents various system options and planning alternatives that must be considered before starting the actual installation process.
- Chapter 3 explains the effect of selecting certain compiler options described in Chapter 2 and details the optional Object Time System (OTS) modules distributed on the release media.
- Chapter 4 describes the installation procedures relevant to the RSX-11M and RSX-11M-PLUS operating systems.
- Chapter 5 describes the installation procedures on a RSTS/E operating system.
- Chapter 6 describes the installation procedures on an IAS operating system that uses the MCR command language.
- Chapter 7 describes the installation procedures on an IAS operating system that uses the DCL command language.
- Chapter 8 explains the testing procedure used to verify that your system is correctly installed.
- Chapter 9 contains release notes.

- Appendix A presents an alternative installation procedure for RSTS/E operating systems.
- Appendix B presents listings of the compiler task-build files for each system.

ASSOCIATED DOCUMENTS

The PDP-11 FORTRAN-77 User's Guide provides detailed information on using the FORTRAN-77 system. The PDP-11 FORTRAN-77 Language Reference Manual describes the elements of the FORTRAN language as implemented in FORTRAN-77. For information on the Object Time System, consult the PDP-11 FORTRAN-77 Object Time System Reference Manual. For a complete list of software documents, see your host operating-system documentation directory.

CONVENTIONS USED IN THIS MANUAL

The following documentation conventions are used throughout this manual:

\$	ALTMODE	The symbol \$ represents the nonprinting ALTMODE key. This key is called the escape (ESC) key on many terminals. This key is pressed in place of the RETURN key when specified. Unless otherwise specified (that is, with the \$), all commands terminate with a carriage return.
CTRL/X		The notation CTRL/X indicates that you must press the CTRL (control) key while simultaneously typing a letter key (for example, CTRL/C, CTRL/Y, CTRL/O).
UPPERCASE lowercase		In examples, text printed in UPPERCASE characters indicates literal information that must be entered as shown. Text printed in lowercase characters indicates that you are to substitute a word or value of your choice (for example, MTn:).

CHAPTER 1

INTRODUCTION

Section 1.1 of this chapter lists, by operating system, the PDP-11 features and components necessary for successfully building a PDP-11 FORTRAN-77 system. Section 1.2 lists the files contained in the PDP-11 FORTRAN-77 distribution kits.

1.1 SYSTEM REQUIREMENTS

The following sections list, by operating system, the minimum PDP-11 system requirements for installing PDP-11 FORTRAN-77. You need read only the section relevant to your host operating system.

NOTE

The term floating-point processor (lowercase) is used in this manual as a generic term to encompass any device or system for processing floating-point data.

1.1.1 RSX-11M

The software included in the PDP-11 FORTRAN-77 distribution media requires the following PDP-11 system components for normal use on an RSX-11M operating system:

- A PDP-11 processor capable of running RSX-11M and equipped with a floating-point processor
- A minimal 22K word partition for compilation
- A minimum of 365 blocks of contiguous online disk storage for the compiler task
- A minimum of 150 to 250 blocks of online disk storage for the Object Time System library
- A KT-11 memory management unit, if you use virtual arrays

Consult Chapter 4 for RSX-11M installation instructions.

INTRODUCTION

1.1.2 RSX-11M-PLUS

The software included in the PDP-11 FORTRAN-77 distribution media requires the following PDP-11 system components for normal use on an RSX-11M-PLUS operating system:

- A PDP-11 processor capable of running RSX-11M-PLUS and equipped with a floating-point processor
- A minimal 22K word partition for compilation
- A minimum of 365 blocks of contiguous online disk storage for the compiler task
- A minimum of 150 to 250 blocks of online disk storage for the Object Time System library

Consult Chapter 4 for RSX-11M-PLUS installation instructions.

1.1.3 RSTS/E

The software included in the PDP-11 FORTRAN-77 distribution media requires the following PDP-11 system components for normal use on an RSTS/E operating system:

- A PDP-11 processor capable of running RSTS/E and equipped with a floating-point processor
- A minimum of 22K words of user space (swap maximum) for installation and compilation
- RT-11 and RSX run-time system support
- A minimum of 365 blocks of contiguous online disk storage for the compiler task
- A minimum of 150 to 250 blocks of online disk storage for the Object Time System library

Consult Chapter 5 for RSTS/E installation instructions.

1.1.4 IAS

The software included in the PDP-11 FORTRAN-77 distribution media requires the following PDP-11 system components for normal use on an IAS operating system:

- A PDP-11 processor capable of running IAS and equipped with a floating-point processor
- A minimal 23K word partition for compilation when I/O services are provided by the standard IAS shared library SYSRES
- A minimum of 365 blocks of contiguous online disk storage for the compiler task
- A minimum of 150 to 250 blocks of online disk storage for the Object Time System library
- A KT-11 memory management unit

INTRODUCTION

1.2 DISTRIBUTION FILES

The software necessary for building a PDP-11 FORTRAN-77 system for an RSX-11M, RSX-11M-PLUS, RSTS/E, or IAS operating system is distributed on magnetic-tape and disk-cartridge media. These media contain the files described in the following sections. The files are listed under the user file directory (UFD) on which they reside in the kit.

1.2.1 UFD [1,2]

<u>File Name</u>	<u>Description</u>
F77COM.MSG	Compiler diagnostic messages file
F77OTS.MSG	Object Time System (OTS) diagnostic messages file
F77.CTL	RSTS/E Build command file

1.2.2 UFD [11,36]

<u>File Name</u>	<u>Description</u>
F77.OLB	PDP-11 Fortran-77 compiler object-module library
F7711M.CMD	PDP-11 FORTRAN-77 compiler-build command files for
F7711M.ODL	RSX-11M/M-PLUS
F77RST.CMD	PDP-11 FORTRAN-77 compiler-build command files for
F77RST.ODL	RSTS/E
F7711D.CMD	PDP-11 FORTRAN-77 compiler-build command files for
F7711D.ODL	IAS using MCR
F77IAS.CMD	PDP-11 FORTRAN-77 compiler-build command files for
F77IAS.ODL	IAS using DCL

1.2.3 UFD [11,37]

<u>File Name</u>	<u>Description</u>
F4POTS.OBJ	Object Time System concatenated object modules
FCS11M.OBJ	Specific OTS modules for RSX-11M/M-PLUS and RSTS/E using FCS-11
FCS11D.OBJ	Specific OTS modules for IAS with MCR using FCS-11
FCSIAS.OBJ	Specific OTS modules for IAS with DCL using FCS-11
RMS11M.OBJ	Specific OTS modules for RSX-11M/M-PLUS and RSTS/E using RMS-11
RMS11D.OBJ	Specific OTS modules for IAS with MCR using RMS-11
RMSIAS.OBJ	Specific OTS modules for IAS with DCL using RMS-11
SHORT.OBJ	OTS short-error text module for RSX-11M/M-PLUS and RSTS/E

INTRODUCTION

1.2.4 UFD [11,40]

<u>File Name</u>	<u>Description</u>
F4P11S.OBJ	Specific OTS modules for RSX-11S subset
F4PMAP.OBJ	PDF name-mapping concatenated object module
F4PCVF.OBJ	Optional OTS floating-point formatted output conversion routine
F4PEIS.OBJ	EIS replacements for OTS integer functions that make use of the FPP
F4PNIO.OBJ	Optional OTS modules without FORTRAN I/O capability
F4PNER.OBJ	Optional OTS error-reporting module
F4PRAN.OBJ	Optional random-number generator

OTS Assembly Parameter Files

F77.MAC
FPP.MAC
FPPDP.MAC
FCS.MAC
RMS.MAC
RSXD.MAC
RSXM.MAC
RSXS.MAC

<u>File Name</u>	<u>Description</u>
F77TST.FTN	System installation-verification test program
F4PRES.MAC	OTS shared-library source file
FCS11M.ODL	OTS overlay-description file for RSX-11M/M-PLUS and RSTS/E using FCS-11
FCSIAS.ODL	OTS overlay-description file for IAS using FCS-11
RMS11M.ODL	OTS overlay-description file for RSX-11M/M-PLUS and RSTS/E using RMS-11
RMSIAS.ODL	OTS overlay-description file for IAS using RMS-11

CHAPTER 2

INSTALLATION PLANNING

This chapter discusses some alternatives you must consider before you start the installation process.

2.1 SELECTING THE DEFAULT FORTRAN

This section is applicable only to systems that use either RSX-11M/M-PLUS or IAS. If you wish to run both FORTRAN IV (FOR) and PDP-11 FORTRAN-77 (F77) on the same system, you must decide whether FOR or F77 is to be the default FORTRAN. You must make this decision because:

- When building a task, object modules produced by the FOR compiler or from the FOR Object Time System (OTS) must not be combined with object modules produced by the F77 compiler or from the F77 OTS.
- The F77 OTS and the FOR OTS cannot be in the same object-module library. (The F77 OTS module is named F4POTS.)

Normally, the default FORTRAN OTS is part of system object-module library LB:[1,1]SYSLIB.OLB. The Task Builder searches this library automatically when linking a task. Either the FOR OTS or the F77 OTS can be located in this library.

If you choose to use both FORTRAN systems, you must build a separate library to contain whichever FORTRAN OTS you do not put in LB:[1,1]SYSLIB.OLB. To use this separate library, you must explicitly name it in a Task Builder command line. (The Task Builder always searches the library named in the invoking command line before searching SYSLIB.)

Before selecting a default FORTRAN, consider which of the two FORTRANs you would like to be easier to use. The FORTRAN whose OTS is in SYSLIB will not require an explicit OTS library reference at task-build time, and therefore will consistently save you time and effort.

2.1.1 Selecting F77 as the Default FORTRAN

If you select F77 as the default FORTRAN, you can continue to use the FOR OTS in one of two ways: by building a separate library containing only FOR OTS modules, or by renaming the current SYSLIB, if it contains FOR OTS modules, to LB:[1,1]FOROTS.OLB.

INSTALLATION PLANNING

2.1.2 Selecting FOR as the Default FORTRAN

If you select FOR as the default FORTRAN, follow the instructions in the IAS/RSX FORTRAN IV Installation Guide for including the FOR OTS in SYSLIB. Then build a separate F77 OTS library as described in "Building the OTS" in the installation chapter pertaining to your operating system (Chapter 4, 6, or 7).

2.2 SELECTING F77 COMPILER OPTIONS

The following options are available when you build the F77 compiler:

- You can assign the compiler work file to a device other than the system device, to enhance compiler performance.
- You can specify the number of pages that are to make up the dynamic storage area to be used by the compiler. A larger paging memory decreases work-file paging activity and enhances compiler performance.
- You can specify the lines per page and line width for listing devices that will be using non-U.S.-standard paper stock.
- You can specify compiler command-switch default settings that differ from the DIGITAL-provided defaults.
- You can alter the values of the following compiler limits:
 - Number of actual arguments per CALL or function reference
 - Number of named COMMON blocks
 - Number of OPEN statement keywords
 - DO and block IF statement nesting depth
- You can choose the default setting for the /F77 compiler switch to be either /F77 or /NOF77.

You can edit the compiler-build file to select any of the above options. Documentation within the file describes the options available and any limitations on choices (see Appendix A). Chapter 3 describes the magnitude of the performance improvements that result from various combinations of the first two options.

2.3 SELECTING F77 OTS OPTIONS

The F77 Object Time System supports one of the following file systems for I/O processing:

- File Control Services (FCS-11), which supports sequential and direct access to sequential files
- Record Management Services (RMS-11), which supports sequential, direct, and keyed access to sequential, relative, and indexed files

When you build the OTS, you must choose either the FCS-11 file system or the RMS-11 file system; the F77 OTS does not support both file systems at one time.

INSTALLATION PLANNING

The distribution kit contains alternate files for incorporating either FCS-11 or RMS-11.

The files for FCS-11 support are:

```
FCS11M.OBJ (used on RSTS/E as well as RSX-11M/M-PLUS)
FCS11D.OBJ
FCSIAS.OBJ
```

The files for RMS-11 support are:

```
RMS11M.OBJ (used on RSTS/E as well as RSX-11M/M-PLUS)
RMS11D.OBJ
RMSIAS.OBJ
```

The "Building the OTS" sections in Chapters 4, 6, and 7 (Sections 4.1.3, 4.2.3, 6.1.3, 6.2.3, 7.1.3, 7.2.3, A.1.3, and A.2.3) include a choice of commands that determines whether your system supports RMS-11 or FCS-11.

Section 3.2 describes OTS options that you can add after you install the basic system.

2.4 PRELIMINARY INSTALLATION PROCEDURES

The following utility programs are required for systems using MCR. If your system uses MCR, install these programs before you proceed with the rest of the installation:

```
PIP
FLX  (if using a magnetic-tape distribution)
TKB
LBR
```

For systems using RSTS/E, the RT-11 and RSX run-time systems must be added. The following utility programs are required on a RSTS/E system:

```
PIP.SAV
TKB.TSK
LBR.TSK
```

The RT-11 run-time system is required for the installation process--specifically to enable the use of PIP. The RT-11 run-time support is not required for the use of PDP-11 FORTRAN-77.

If you are replacing any version of FORTRAN IV-PLUS, the following preliminary steps are required:

1. If the FORTRAN IV-PLUS compiler is installed in the system and you are installing the F77 compiler as F4P, remove it with the following code:

```
REM ...F4P (for RSX-11M/M-PLUS, IAS)
RUN $UTILTY (FOR RSTS/E) #CCL F4P==
```

INSTALLATION PLANNING

2. If you currently have FORTRAN IV-PLUS, the following files will be on the system disk:

[1,2] F4PCOM.MSG	(All operating systems)
[1,2] F4POTS.MSG	(IAS)
[11,1] F4P.TSK	(IAS)
[libuic] F4P.TSK	(RSX-11M/M-PLUS)
[1,2] F4P.TSK	(RSTS/E)

After PDP-11 FORTRAN-77 has been successfully installed, the following files will be on the system disks:

[1,2] F77COM.MSG	(All operating systems)
[1,2] F77OTS.MSG	(IAS)
[11,1] F77.TSK	(IAS)
[libuic] F77.TSK	(RSX-11M/M-PLUS)
[1,2] F77.TSK	(RSTS/E)

3. After PDP-11 FORTRAN-77 has been successfully installed and if you no longer intend to use FORTRAN IV-PLUS, you can delete the following files:

[1,2] F4PCOM.MSG	(All operating systems)
[1,2] F4POTS.MSG	(IAS)
[11,1] F4P.TSK	(IAS)
[libuic] F4P.TSK	(RSX-11M/M-PLUS)
[1,2] F4P.TSK	(RSTS/E)

4. Delete all files in reserved UFD [11,36], or, in the case of RSTS/E, the particular UFD on which FORTRAN IV-PLUS resides.
5. If you want to incorporate the F77 OTS into SYSLIB.OLB, obtain a copy of SYSLIB. You must either obtain a copy of SYSLIB that contains everything currently in SYSLIB except the PDP-11 FORTRAN OTS and incorporate the PDP-11 FORTRAN-77 OTS into it, or obtain a fresh copy of SYSLIB from the operating system distribution kit and reincorporate all optional software modules. OTS modules cannot be added to a library containing a previous version of the OTS.
6. If you want to incorporate the F77 OTS into an existing library, make sure that the library-module name table and the entry-point name table can accommodate the OTS.

Module names: 200
Entry points: 450

If necessary, compress the existing library using the librarian compress command.

2.4.1 RSX-11M/M-PLUS

On an RSX-11M or RSX-11M-PLUS system, use a privileged user account--for example, the account with UIC [1,1]--for all operations used in building the FORTRAN-77 system.

During the build process, always run a program that is to create a file, under the UIC that corresponds to the UFD in which the file will be created. You can use the SET command to set the UIC as required.

The F77 compiler is built into a system UIC called LIBUIC, which is reserved for DIGITAL products.

INSTALLATION PLANNING

On RSX-11M systems, LIBUIC is equivalent to SYSUIC. You can find the value of SYSUIC by using the SET command as follows:

```
>SET /SYSUIC  
SYSUIC = [x,y]
```

On RSX-11M-PLUS systems, you can find the value of LIBUIC by using the SET command as follows:

```
>SET /LIBUIC  
LIBUIC = [x,y]
```

Use the value [x,y] as required during the installation.

2.4.2 RSTS/E

On a RSTS/E system, use a privileged user account--for example, the account with UIC [1,1], but preferably not the account with UIC[1,2]--for all operations used in building the PDP-11 FORTRAN-77 system.

2.4.3 IAS using MCR or DCL

On an IAS system using MCR or DCL, use a privileged account -- for example, the account with UIC [1,1] -- for all operations used in building the FORTRAN-77 system.

2.5 MAKING THE COMPILER TASK AVAILABLE

After the compiler task has been created, the task-image file must be made available for use (installed). The following sections tell how to install the FORTRAN-77 compiler under each operating system.

2.5.1 RSX-11M/M-PLUS

On an RSX-11M or RSX-11M-PLUS system, you install the F77 compiler from the library area LIBUIC as follows:

```
>INS [libuic]F77
```

You can install the F77 compiler either in the saved system image or as part of system startup procedures. To install F77 during system startup, include the appropriate INS command (above) in system startup file [1,2]STARTUP.CMD. To install F77 in the saved system image, consult the RSX-11M System Generation and Management Guide or the RSX-11M-PLUS System Generation and Management Guide.

To install PDP-11 FORTRAN-77 as F4P, which may be desirable if your site has existing command files that call the F4P compiler, use the following command:

```
>INS [libuic] F77/TASK= ...F4P
```


INSTALLATION PLANNING

2.5.2 RSTS/E

On a RSTS/E system, you may install the F77 compiler as a CCL command, as follows:

```
RUN $UTILTY
#CCL F77--SY:[1,2]F77.TSK
```

To install F77 during system startup, include the above CCL command in system startup file [1,2]CCL.CMD.

To install PDP-11 FORTRAN-77 as F4P, which may be desirable if your site has existing command files that may call the F4P compiler, use the following commands:

```
RUN $UTILTY
#CCL F4P--SY:[1,2]F77.TSK
```

2.5.3 IAS using MCR

On an IAS system with MCR, you install the F77 compiler as follows:

```
MCR> INS [11,1]F77
```

Consult the IAS System Generation Startup Guide for the procedures you must follow to save the system image with the F77 compiler installed.

To install PDP-11 FORTRAN-77 as F4P, which may be desirable if your site has existing command files that call the F4P compiler, use the following command:

```
MCR> INS [11,1]F77/TASK= ...F4P
```

2.5.4 IAS using DCL

On an IAS system with DCL, you install the F77 compiler as follows:

```
PDS>INSTALL [11,1]F77
```

If the F77 compiler is installed as F77, you can invoke it only with MCR. The DCL command FORTRAN/F77 is not supported.

To install PDP-11 FORTRAN-77 as the system default FORTRAN, but named FOR instead of F77, use the following command:

```
PDS>INSTALL/TASK:...FOR [11,1]F77
```

To install PDP-11 FORTRAN-77 as F4P, which may be desirable if your site has existing command files that call the F4P compiler, use the following command:

```
PDS> INSTALL/TASK:...F4P [11,1]F77
```

Consult the IAS System Generation Startup Guide for the procedures required to save the system image with the F77 compiler installed.

CHAPTER 3

SYSTEM TAILORING

This chapter describes options you may choose when building PDP-11 FORTRAN-77 into your system. It includes factors affecting compiler performance and information about optional OTS modules that you can use to tailor PDP-11 FORTRAN-77 to your particular applications.

3.1 OPTIONS AFFECTING COMPILE-TIME PERFORMANCE

There are three options open to you that affect compile-time performance:

- You may choose one or two additional temporary disk files for the compiler to use for storing information during the compilation process.
- You may alter the size of the dynamic storage area in the compiler.
- You may place the compiler work file on a fixed-head disk.

The PDP-11 FORTRAN-77 compiler uses temporary disk files for storing information during the compilation process. The compiler requires at least one temporary file, called the work file.

The work file contains information that the compiler normally accesses at random (for example, the symbol table and the constants table). The dynamic storage area within the compiler is used to manipulate this information. (Only part of the work file is in memory at any given time. Software paging techniques move information back and forth between the dynamic storage area and the work file.)

Information must be moved into the dynamic storage area when needed by the compiler. Therefore, increasing the size of the dynamic storage area increases compilation speed, by reducing the number of disk I/O operations (see Section 3.1.3). Similarly, speeding up the average disk I/O operation, by placing the work file on a fixed-head disk instead of a moving-head disk, also improves the compilation rate (see Section 3.1.6).

3.1.1 Additional Temporary Files

The `/WF:w` compiler switch specifies the number of temporary disk files that are to be available to the compiler. If you specify `/WF:1`, the compiler stores internal representations of optimized source code and PDP-11 code in just one file, the work file. However, if you specify `/WF:2` (or `/WF:3`), the compiler stores some (or all) of these representations in the one or two other temporary files. (The `/WF:2` option is the default.)

SYSTEM TAILORING

Using additional temporary files slows the compilation process, but it significantly increases the capacity of the compiler. For instance, with three temporary files (/WF:3) available to it, the compiler can compile a program that is approximately three times larger than any it can compile with only one temporary file (/WF:1).

No significant change occurs in the compilation rate if you place the temporary files on a fixed-head disk, because these files are written and read sequentially.

3.1.2 Selecting the Size of the Dynamic Storage Area

Increasing the size of the dynamic storage area increases the rate of compilation. Experimental data indicates that using 14 pages of dynamic storage results in optimal improvement in compilation speed.

Figure 3-1 illustrates the correlation between compile time and the size of the dynamic storage area. The compile time of four different FORTRAN programs, varying in length from 90 to 450 statements, was measured on a PDP-11/60. The compiler used two temporary files (/WF:2), with the work file residing on the system moving-head disk (RP04). The dynamic storage area varied in size from 4 to 26 pages.

No output listing was produced.

The measurements at the end points of each curve denote approximate compilation rate measured in statements compiled per minute. Continuation and comment lines were not counted.

As the figure shows, compilation speed is approximately three times greater when 26 pages of dynamic storage are used than it is when only 4 pages are used. However, using 14 pages results in optimal compiler performance. Building the compiler with more than 14 pages of dynamic storage achieves minimal improvement in the rate of compilation. The default size of the dynamic storage area is 12 pages.

3.1.2.1 Operating Systems Supporting Dynamic Memory Allocation - Under a RSTS/E, IAS, RSX-11M-PLUS, or RSX-11M system, with dynamic memory allocation, you specify the size of the PDP-11 FORTRAN-77 compiler's dynamic storage area by using the EXTTSK option in the task-build command file. The value specified by EXTTSK is the size of the dynamic storage area in decimal words. The size of the dynamic storage area is computed as follows:

$$256*(n+w+1)$$

where:

n is the number of pages for the dynamic storage area.

w is the value specified in the /WF:w switch.

You can override the dynamic storage area specified by EXTTSK at installation by means of the INC switch on the INSTALL (INS) command. The task extension size is specified in decimal words.

SYSTEM TAILORING

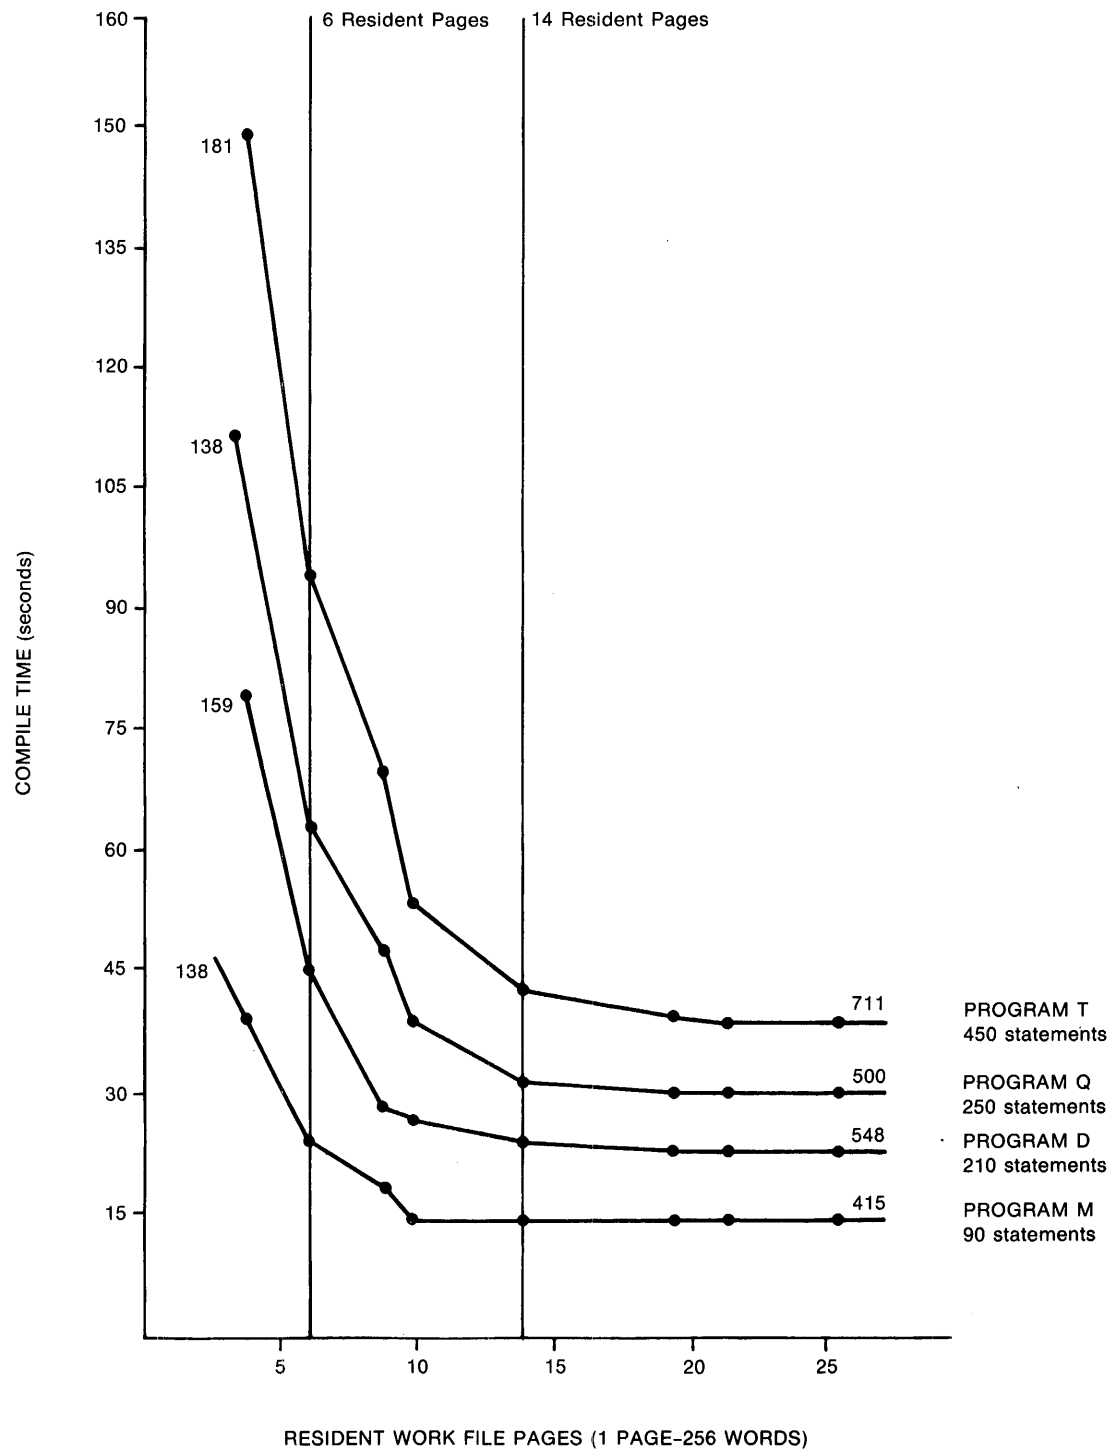


Figure 3-1 Compiler Performance

ZK-209-81

SYSTEM TAILORING

The following table shows the correlation between the compiler task size, the EXTTSK value, and the number of pages for the dynamic storage area under /WF:2.

Number of Pages	EXTTSK = Value INS/INC Value	Size of Compiler Task (words)
4	1792	22K
8	2816	23K
12	3840	24K
16	4864	25K

For RSX-11M/M-PLUS installations that use by default the ANSI magnetic-tape version of FCS-11 (LB:[1,1]ANSLIB.OLB), the compiler task size increases by approximately 500 words.

3.1.2.2 RSX-11M Without Dynamic Memory Allocation - On an RSX-11M system without dynamic memory allocation, the PDP-11 FORTRAN-77 compiler determines the size of the partition in which it is operating and uses all of the memory in that partition. Install the compiler in a partition large enough for the compiler to run with the desired number of pages of dynamic storage.

3.2 OTS OPTIONS

The distribution kit includes a number of optional OTS modules under UFD [11,40]. After building the OTS library, you can add one or more of these optional modules to the library, or you can maintain these modules separately and refer to them only as needed. To add the modules to the library, refer to procedures in the following sections:

- Sections 4.1.3 and 4.2.3 for RSX-11M/M-PLUS
- Sections A.1.3 and A.2.3 for RSTS/E
- Sections 6.1.3 and 6.2.3 for IAS using MCR
- Sections 7.1.3 and 7.2.3 for IAS using DCL

The installation procedures copy these modules to LB:[1,1] (LB: under RSTS/E). The PDP-11 FORTRAN-77 system does not require any of the optional modules for normal use.

3.2.1 F4P11S

F4P11S.OBJ is a concatenated object module containing alternate versions of FORTRAN sequential I/O support modules. These I/O support modules, designed for use with RSX-11S, provide sequential I/O to non-file-structured devices (for example, terminals, nonspooled card readers, and line printers). These modules do not use the file system but perform direct QIO operations; they reduce task size by approximately 2500 words.

NOTE

In the following sections, if you are using the RSTS/E system, replace all occurrences of LB:[1,1] with LB:..

SYSTEM TAILORING

You can use F4P11S.OBJ in two ways:

- You can include it as an object module at task-build time, as follows:

```
TKB>MAIN/FP=MAIN, LB:[1,1]F4P11S.OBJ
```

- Or you can build a separate F77 OTS library for RSX-11S use, LB:[1,1]F4P11S.OLB, in addition to the host operating system's OTS library. To do this, when building the OTS substitute module LB:[1,1]F4P11S.OBJ (or, for RSTS/E, LB:F4P11S.OBJ) for the file-system module selected in Section 2.3. For example, replace the reference to FCS11M.OBJ with LB:[1,1]F4P11S.OBJ.

Use this OTS library, rather than the host operating system's OTS library, when building tasks for RSX-11S, as follows:

```
TKB>MAIN/FP=MAIN, LB:[1,1]F4P11S/LB
```

3.2.2 Short Error Text - RSX-11M/M-PLUS and RSTS/E Only

For error messages, the FORTRAN-77 OTS references an error-text module containing ASCII text. If your operating system is RSX-11M, RSX-11M-PLUS, or RSTS/E, you can use a long or a short error-text module. The long error-text module requires approximately 1000 words of memory, whereas the alternate version (SHORT.OBJ) requires only one word of memory.

A task with the short error-text module built into it generates complete error reports, but omits the one-line description of the error condition. The PDP-11 FORTRAN-77 User's Guide contains a complete list of OTS error numbers and message text.

The F77 OTS, as built in the following chapters, uses the long error-text by default. You can build a task using the short error-text module by loading module \$SHORT from the library. Therefore, for example, if the F77 OTS is part of SYSLIB, you use the following command to build the short error-text module into a task, if your operating system is RSX-11M or RSX-11M-PLUS:

```
TKB>MAIN/FP=MAIN, LB:[1,1]SYSLIB/LB:$SHORT
```

If your operating system is RSTS/E, and F4POTS is resident in SYSLIB, you may use the short error-text module by typing the following command:

```
TKB MAIN/FP=MAIN, LB:SYSLIB/LB:$SHORT
```

You may prefer to use the short error-text as the system default. If so, reorder the steps in the OTS build procedures so that insertion of SHORT.OBJ into the library is the last step rather than first; if you are using the BUILD procedure for a RSTS/E installation, simply answer the relevant interactive question by typing SHORT.

SYSTEM TAILORING

For example, instead of using the sequence of commands given in Sections 4.1.3 and A.1.3 for installing the F77 OTS into SYSLIB, order the commands as follows. (If you are using a RSTS/E system, replace all occurrences of [11,36] with the account where the object modules were copied during installation.)

```
LBR>LB:SYSLIB.OLB=[11,36]FCS11M.OBJ
or
LBR>LB:SYSLIB.OLB=[11,36]RMS11M.OBJ

LBR>LB:SYSLIB.OLB/DG:$ERTXT
LBR>LB:SYSLIB.OLB=[11,36]F4POTS.OBJ
LBR>LB:SYSLIB.OLB=[11,36]SHORT.OBJ/RP
```

Reorder the commands in Section 4.2.3 and A.2.3 as follows:

```
LBR>LB:SYSLIB.OLB=FP:[11,37]FCS11M.OBJ
or
LBR>LB:SYSLIB.OLB=FP:[11,37]RMS11M.OBJ

LBR>LB:SYSLIB.OLB/DG:$ERTXT
LBR>LB:SYSLIB.OLB=FP:[11,37]F4POTS.OBJ
LBR>LB:SYSLIB.OLB=FP:[11,37]SHORT.OBJ/RP
```

If the short error-text is the system default, you can use the complete error-text by explicitly loading module \$ERTXT from the library. The following command loads the \$ERTXT module for RSX-11M/M-PLUS:

```
TKB>MAIN/FP=MAIN, LB:[1,1]SYSLIB/LB:$ERTXT
```

For RSTS/E, the command to the task builder takes the following form:

```
TKB> MAIN/FP=MAIN, LB:SYSLIB/LB:$ERTXT
```

3.2.3 F4PMAP

Module F4PMAP.OBJ consists of a set of concatenated object modules that can be used to transform intrinsic-function names into internal names at task-build time. (The PDP-11 FORTRAN-77 compiler transforms intrinsic-function names into internal names at compile time.)

Without F4PMAP.OBJ, if a program written in MACRO-11 attempts to reference a PDP-11 FORTRAN-77 intrinsic function with the FORTRAN name of the function instead of the internal name, an unresolved reference will occur during task build.

For example, F4PMAP.OBJ maps the FORTRAN name SIN by means of the following module:

```
          .TITLE      $MSIN
SIN::    JMP          $SIN
          .END
```

F4PMAP.OBJ contains an object module similar to the above module for each of the PDP-11 FORTRAN-77 intrinsic functions.

SYSTEM TAILORING

You can build an F4PMAP library as follows:

```
(MCR command format)
LBR>LB:[1,1]F4PMAP.OLB/CR:40.=LB:[1,1]F4PMAP.OBJ

(IAS PDS command format)
PDS>LIBR CREATE/SIZE:40 LB:[1,1]F4PMAP LB:[1,1]F4PMAP

(RSTS/E command format)
LBR>LB:F4PMAP.OLB/CR:40=LB:F4PMAP.OBJ
```

3.2.4 F4PEIS

F4PEIS.OBJ is a concatenated object module containing extended instruction set (EIS) versions of certain integer functions that normally use a floating-point processor. This module allows FORTRAN programs that do not do floating-point arithmetic to run on a machine that has the extended instruction set but not a floating-point processor. The modules provided in the F77 OTS use a floating-point processor for maximum efficiency in certain INTEGER*4 computations.

Use one of the following commands to replace at task-build time the normal modules in file INTEGER with their EIS versions:

```
(MCR command format)
TKB>INTEGER/--FP=INTEGER, LB:[1,1]F4PEIS.OBJ

(IAS PDS command format)
PDS>LINK/NOFLOATING INTEGER, LB:[1,1]F4PEIS

(RSTS/E command format)
TKB>INTEGER/--FP=INTEGER, LB:F4PEIS.OBJ
```

3.2.5 F4PCVF

Object module F4PCVF.OBJ is an alternative module for performing formatted output of floating-point values under control of the D, E, F, and G field specifiers. The standard module provided as part of the F77 OTS uses multiple-precision, fixed-point integer techniques to maintain maximum accuracy during the conversion of data (FPP hardware is not used). The alternative module performs the same functions using the FPP hardware. It is approximately twice as fast as, but in some cases slightly less accurate than, the standard module.

You can substitute the F4PCVF module for the default conversion module as follows:

```
(MCR command format)
LBR>LB:[1,1]SYSLIB=LB:[1,1]F4PCVF/RP

(IAS PDS command format)
PDS>LIBR REPLACE LB:[1,1]SYSLIB LB:[1,1]F4PCVF

(RSTS/E command format)
LBR>LB:SYSLIB=LB:F4PCVF/RP
```


SYSTEM TAILORING

3.2.6 F4PNER

Object module F4PNER.OBJ is an alternative module for reporting run-time errors. If you use this module, the error-message text report is suppressed. However, error processing and calls to ERRSET, ERRSNS, and ERRST continue to operate normally; only the logging of the message on the user's terminal is suppressed. The STOP and PAUSE statement messages are also suppressed. F4PNER.OBJ reduces task size by about 375 words over the standard module.

3.2.7 F4PNIO

F4PNIO.OBJ is a concatenated object module containing alternative versions of certain OTS routines that are always present in the user task and that provide support for FORTRAN I/O operations. The alternate routines in F4PNIO.OBJ do not support FORTRAN I/O, and reduce task size by approximately 1000 words for programs that do not require FORTRAN I/O (such as process control).

3.2.8 F4PRAN

F4PRAN.OBJ is a concatenated object module containing an alternative random-number generator that is compatible with previous releases of PDP-11 FORTRAN. If you require this random-number generator for compatibility purposes, include file LB:[1,1]F4PRAN.OBJ at task-build time.

3.2.9 F4PRES

F4PRES.MAC is a MACRO-11 source file containing global references to all modules of the OTS. An OTS resident library (shared global area, or SGA) is an option available to installations that have many FORTRAN-77 programs as well as PDP-11 FORTRAN-77 development. F4PRES.MAC contains the global references to the OTS and documentation on logical groups of OTS modules. This feature aids in the building of an OTS resident library that is tailored to the needs of a particular installation.

The RMS version of the OTS cannot be built into a shareable library that includes any RMS modules.

Consult the task builder and system generation manuals for your operating system for more information on shareable libraries.

3.2.10 OTS Overlay Description Files

The four OTS overlay-description files are:

- FCS11M.ODL - FCS-11 support for RSX-11M/M-PLUS and RSTS/E
- FCSIAS.ODL - FCS-11 support for IAS
- RMS11M.ODL - RMS-11(K) support for RSX-11M/M-PLUS, and RSTS/E
- RMSIAS.ODL - RMS-11(K) support for IAS

SYSTEM TAILORING

Each file is an ODL fragment file that you can use for overlaying the PDP-11 FORTRAN-77 OTS modules. Each file contains documentation that describes OTS options as well as procedures for using the file.

NOTE

If you are using the RSTS/E system, files FCS11M.ODL and RMS11M.ODL contain references to LB:[1,1]. All occurrences of LB:[1,1] should be changed to LB:.

CHAPTER 4

RSX-11M/M-PLUS INSTALLATION

This chapter describes the procedures for installing PDP-11 FORTRAN-77 on the RSX-11M and RSX-11M-PLUS operating systems. Read the sections relevant to the type of distribution kit you are using (Section 4.1 for the magnetic-tape distribution and Section 4.2 for the disk-cartridge distribution). Section 4.3 presents instructions for invoking the compiler.

The basic installation procedure for PDP-11 FORTRAN-77 consists of:

- Building the F77 compiler task from an object-module library
- Building an F77 OTS library from object modules
- Copying the compiler diagnostic-message file from the distribution medium to the system disk

4.1 INSTALLATION FROM MAGNETIC TAPE DISTRIBUTION

The following sections explain how to build PDP-11 FORTRAN-77 from a magnetic-tape distribution kit.

4.1.1 Preparations

UFD [11,36] is used in building the PDP-11 FORTRAN-77 system; therefore, if this user file directory is not already present on your system, create it on the system disk with the following command:

```
.. >UFD SY:[11,36]
```

Once UFD [11,36] is present (or if already present), assign FP: as the logical name for the system device as follows:

```
>ASN SY:=FP:
```

Now place the distribution magnetic tape, write-locked, on drive 0, and load the magnetic tape handler, if not already resident, as follows (Note that the device name for some magnetic tape units is MM: or MS:. If you are using such a device, substitute MM: or MS: for MT: in the following commands):

```
>LOA MT:
```

Now mount the magnetic tape. If you are using RSX-11M, allocate the magnetic tape as follows:

```
>ALL MT:
```

RSX-11M/M-PLUS INSTALLATION

On RSX-11M-PLUS, the magnetic tape must be mounted as a foreign device, as follows:

```
>MOU MT:/FOR
```

4.1.2 Building the Compiler

You build the compiler from the object-module library supplied on the distribution medium. First, set the UIC to [11,36] and copy the required files from the magnetic tape to the system disk, as follows:

```
>SET /UIC=[11,36]
>FLX SY:=MT0:F77.OLB
>FLX SY:=MT0:F7711M.*
```

Now edit compiler task-build command file [11,36]F7711M.CMD to select installation options, as described in Section 2.2 and Appendix B.

Then set the UIC to the system-library area LIBUIC as follows:

```
>SET /UIC=[libuic]
```

Now build the compiler as follows:

```
>TKB @[11,36]F7711M
```

Retain the edited command files in [11,36] for reference.

4.1.3 Building the OTS

To build the OTS, first set the UIC to [11,36] and copy the required OTS files from the magnetic tape to the system disk, as follows:

```
>SET /UIC=[11,36]
>FLX SY:[11,36]=MT0:[11,37]*.OBJ
```

You can now build the F77 OTS in either of two ways:

1. One way to build the OTS is to merge the OTS concatenated object modules into an existing library: (for example, LB:[1,1]SYSLIB.OLB). If you plan to use the RMS-11 file system and RMSLIB.OLB has already been incorporated into SYSLIB.OLB, you cannot place F4POTS.OLB in SYSLIB.OLB.

First, invoke and use the LBR utility program as follows:

```
LBR>LB:SYSLIB.OLB=[11,36]SHORT.OBJ/RP
LBR>LB:SYSLIB.OLB/DG:$ERTXT
LBR>LB:SYSLIB.OLB=[11,36]F4POTS.OBJ
```

Now use one of the following commands to incorporate either RMS-11 support or FCS-11 support, but not both (see Section 2.3) as follows:

```
LBR>LB:SYSLIB.OLB=[11,36]FCS11M.OBJ
or
LBR>LB:SYSLIB.OLB=[11,36]RMS11M.OBJ
```

RSX-11M/M-PLUS INSTALLATION

2. The second way to build the OTS is to generate a separate library using the OTS concatenated object modules, as follows: (If you build a separate library, you must designate file LB:[1,1]F4POTS.OLB when building a task from modules produced by the PDP-11 FORTRAN-77 compiler.)

That is, set the UIC to that of the new library, for example
>SET/UIC=[1,1], and invoke the LBR utility program as follows:

```
LBR>LB:F4POTS.OLB/CR:150.=[11,36]SHORT.OBJ
LBR>LB:F4POTS.OLB/DG:$ERTXT
LBR>LB:F4POTS.OLB=[11,36]F4POTS.OBJ
```

Now use one of the following commands to incorporate either RMS-11 support or FCS-11 support, but **not** both:

```
LBR>LB:F4POTS.OLB=[11,36]FCS11M.OBJ
or
LBR>LB:F4POTS.OLB=[11,36]RMS11M.OBJ
```

After completing one of the above, copy the optional OTS modules to the system disk as follows:

```
>FLX LB:[1,1]=MT0:[11,40]*.OBJ,*.ODL,*.MAC,*.FTN
```

4.1.4 Copying the Message File

At this point, set the UIC to [1,2] and copy the compiler message file to the system disk as follows:

```
>SET /UIC=[1,2]
>FLX LB:[1,2]=MT0:[1,2]F77COM.MSG/IM:64./BL:14.
```

4.2 INSTALLATION FROM DISK CARTRIDGE DISTRIBUTION

The following sections explain how to build FORTRAN-77 from a disk-cartridge distribution kit. If the system disk is not the same device type as that of the distribution disk, place the distribution disk in drive 0. If the system disk is the same device type as that of the distribution disk, use drive 0 for the system disk and drive 1 for the distribution disk.

In the directions that follow, logical-unit assignment Dxn:=FP: assigns the logical-device name FP: to the drive of the distribution disk. In this assignment, x can take the value K, M, or L, and n can take the value 0 or 1 (on the basis of the type of the system device). Use DK0 or DK1 for the RK05 distribution; use DM0 or DM1 for the RK06 or RK07 distribution; and use DL0 or DL1 for the RL01 or RL02 distribution.

4.2.1 Preparations

UFD [11,36] is used in building the PDP-11 FORTRAN-77 system; therefore, if this user file directory is not already present on your system, create it on the system disk with the following command:

```
>UFD SY:[11,36]
```

RSX-11M/M-PLUS INSTALLATION

Once UFD[11,36] is present (or if already present), load the disk handler, if not already resident, as follows:

```
>LOA Dx:                (not needed if the system device is the
                        same device type as that of the
                        distribution disk)
```

Now place the distribution disk cartridge in drive n (write-locked), and make the logical assignment and mount the volume as follows:

```
>ASN Dxn:=FP:
>MOU FP:F77
```

4.2.2 Building the Compiler

You build the compiler from the object-module library on the distribution disk. First, set the UIC to [11,36] and copy the compiler-build files from the distribution disk to the system disk, as follows:

```
>SET /UIC=[11,36]
>PIP SY:=FP:F77.OLB
>PIP SY:=FP:F7711M.*
```

Now edit compiler task-build command file [11,36]F7711M.CMD to select installation options, as described in Section 2.2 and in Appendix B.

Then set the UIC to system-library area LIBUIC as follows:

```
>SET /UIC=[libuic]
```

Now build the compiler with the following command:

```
>TKB @[11,36]F7711M
```

Retain the edited command files in [11,36] for reference.

4.2.3 Building the OTS

You can build the F77 OTS in either of two ways:

1. One way to build the OTS is to merge the OTS concatenated object modules into an existing library: (for example, LB:[1,1]SYSLIB.OLB). If you plan to use the RMS-11 file system and RMSLIB.OLB has already been incorporated into SYSLIB.OLB, you cannot place F4POTS.OLB in SYSLIB.OLB.

First, invoke and use the LBR utility program as follows:

```
LBR>LB:SYSLIB.OLB=FP:[11,37]SHORT.OBJ/RP
LBR>LB:SYSLIB.OLB/DG:$ERTXT
LBR>LB:SYSLIB.OLB=FP:[11,37]F4POTS.OBJ
```

Now use one of the following commands to incorporate either RMS-11 support or FCS-11 support, but **not** both:

```
LBR>LB:SYSLIB.OLB=FP:[11,37]FCS11M.OBJ
or
LBR>LB:SYSLIB.OLB=FP:[11,37]RMS11M.OBJ
```

(See Section 2.3 for an explanation of the RMS-11 and the FCS-11 file systems.)

RSX-11M/M-PLUS INSTALLATION

2. The second way to build the OTS is to generate a separate library using the OTS concatenated object modules. (If you build a separate library, you must designate file LB:[1,1]F4POTS.OLB when building a task from modules produced by the PDP-11 FORTRAN-77 compiler.)

That is, set the UIC to that of the new library and invoke the LBR utility program, as follows:

```
LBR>LB:F4POTS.OLB/CR:150.=FP:[11,37]SHORT.OBJ
LBR>LB:F4POTS.OLB/DG:$ERTXT
LBR>LB:F4POTS.OLB=FP:[11,37]F4POTS.OBJ
```

Now use one of the following commands to incorporate either RMS-11 support or FCS-11 support, but **not** both:

```
LBR>LB:F4POTS.OLB=FP:[11,37]FCS11M.OBJ
or
LBR>LB:F4POTS.OLB=FP:[11,37]RMS11M.OBJ
```

After completing one of the above, copy the optional OTS modules to the system disk as follows:

```
>PIP LB:[1,1]=FP:[11,40]*.OBJ,*.ODL,*.MAC,*.FTN
```

4.2.4 Copying the Message File

At this point, set the UIC to [1,2] and copy the F77 compiler message file to the system disk, as follows:

```
>SET /UIC=[1,2]
>PIP LB:[1,2]=FP:[1,2]F77COM.MSG
```

4.3 INVOKING THE COMPILER

You invoke the F77 compiler in either of two ways:

- If the compiler is installed as an MCR function (see Section 2.5.1), you invoke the compiler with the following command:

```
>F77
```

- If the compiler is not installed, you invoke the compiler as follows:

```
>RUN $F77
```

CHAPTER 5

RSTS/E INSTALLATION

This chapter describes the procedures for installing FORTRAN-77 on the RSTS/E operating system, using the RSTS/E BUILD procedure. If you are more familiar with RSX-11 installations and command language than you are with RSTS/E installations and command language, refer to Appendix A for an alternative installation of PDP-11 FORTRAN-77 on a RSTS/E system.

The basic installation procedure consists of:

1. Mounting (and in some cases copying to the system disk) the Autopatch Kit
2. Mounting the PDP-11 FORTRAN-77 distribution kit
3. Building the compiler and the Object Time System (OTS) with the BUILD program

The RSTS/E Autopatch Kit contains any patches that must be made to the PDP-11 FORTRAN-77 compiler and/or the Object Time System.

The Autopatch Kit and the distribution kit are contained on magnetic tapes or disk cartridges.

5.1 MOUNTING (AND COPYING) THE AUTOPATCH KIT

If your Autopatch Kit is on magnetic tape, follow the instructions in Section 5.1.1; if it is on disk, follow the instructions in Section 5.1.2.

5.1.1 Mounting and Copying a Magnetic-Tape Kit

Place the tape containing the Autopatch Kit, write-locked, on a tape drive; then place the tape online. It is not necessary to specify the MOUNT command for magnetic tape.

Now use the PATCPY program to copy the Autopatch Kit to the system disk. Refer to the RSTS/E System Generation Manual for instructions on how to use the PATCPY program.

After the Autopatch Kit has been copied to the system disk, dismount the tape and refer to Section 5.2.

RSTS/E INSTALLATION

5.1.2 Mounting (and Copying) a Disk Kit

Place the disk cartridge containing the Autopatch Kit on an available disk drive, write-locked; then enter the command:

```
MOUNT Dxn:PATCHE/RO
```

where x is the value K, M, or L, and n is the number of the disk drive.

If a second disk drive is available, refer to Section 5.2; otherwise, follow the remaining instructions in this section.

If only one disk drive is available (the one on which the Autopatch Kit is mounted), you must now copy the Autopatch Kit to the system disk, using the RSTS/E PATCPY program. Refer to the RSTS/E System Generation Manual for instruction on how to use the PATCPY program.

After the Autopatch Kit has been copied to the system disk, dismount the disk and refer to Section 5.2

5.2 MOUNTING THE F77 DISTRIBUTION KIT

To mount a magnetic-tape distribution kit, place the tape, write-locked, on a tape drive; then place the tape online. It is not necessary to specify the mount command.

To mount a disk distribution kit, place the disk cartridge on drive n, write-locked, and enter the command:

```
MOUNT Dxn:F77/RO
```

where x is the value K, M, or L, and n is the number of the disk drive.

5.3 BUILDING THE COMPILER AND THE OTS

You use the RSTS/E BUILD program to build (install) the compiler and the OTS.

First, log into a privileged account (for example, the one with PPN [1,0], but preferably not the one with PPN [1,2]); then type the following command and press RETURN:

```
RUN $BUILD
```

After you press RETURN, BUILD prints the following message:

```
BUILD V7.0-07 RSTS V7.0-07 Time Sharing
```

BUILD then prompts you for information by asking you a series of questions. These questions are given and discussed below:

```
SYSTEM BUILD <NO> ?
```

Press RETURN to accept the NO default.

```
SOURCE INPUT DEVICE <SY:> ?
```

RSTS/E INSTALLATION

Enter the mnemonic and unit number of the device on which you placed the FORTRAN-77 distribution medium, followed by a colon (:). For example, if you received your software on magnetic tape and mounted it on tape drive 0, you type MT0:.

LIBRARY OUTPUT DEVICE <SY:> ?

BUILD asks for the mnemonic name and unit number of the device containing the system library. Because the FORTRAN-77 compiler assumes the library is on SY: in account [1,2], it is more convenient to have the system library on that device. If your library is on SY:, press RETURN. If not, specify the name of the device that contains your system library.

TARGET SYSTEM DEVICE <SY0:> ?

Press RETURN to accept the SY0: default.

LIBRARY ACCOUNT <[1,2]> ?

The system library account contains programs that BUILD uses during the installation. BUILD must know the location of these programs. If the account number for your system library is [1,2], accept the default by pressing RETURN. If the library is in another account, type this account number in the form, [p,pn].

CONTROL FILE IS ?

The control file, F77.CTL, contains the commands needed to install FORTRAN-77. To tell BUILD which file to use, type F77, then press RETURN.

BUILD then prints the following message on your terminal, telling you it is copying the F77.CTL file from the distribution medium to temporary file BLD01.TMP.

___ COPYING FILE dev: [1,2] F77.CTL TO BLD01.TMP ___

If you did NOT accept the SY: default to LIBRARY OUTPUT DEVICE, BUILD prints the question:

LOCATE LOGICAL 'LB:' ON <SY: [1,1]> ?

It is recommended that you place LB: in an account other than [1,1]. Storing these files in [1,1] clutters the Master File Directory and slows access to user accounts and files. Therefore, type the disk device mnemonic, the unit number of the disk drive, a colon, and the account number you have chosen. The account you specify becomes the location of the logical name LB:.

FUNCTION (BUILD/PATCH, PATCH, BUILD) <BUILD/PATCH> ?

If you mounted the RSTS/E Autopatch Kit or have patches on disk, press RETURN to accept the <BUILD/PATCH> default. You can now install and patch the software at the same time. BUILD installs FORTRAN-77 properly even if there are no patches to apply.

PATCH FILE INPUT LOCATION <SY:[200,200]> ?

Press RETURN if you transferred the patches from the distribution medium to account [200,200] on the public disk structure. If not, specify the device and account that contain the patches.

SAVE PATCHED SOURCES <NO> ?

RSTS/E INSTALLATION

Accept the NO default by pressing RETURN. The installation of FORTRAN-77 does not create patched sources. (BUILD may create patched sources when you patch other source code.)

You select features for the Object Time System by answering the following questions:

PUT THE F77OTS IN SYSLIB.OLB OR F4POTS.OLB <SYSLIB> ?

You can place the Object Time System in SYSLIB.OLB or F4POTS.OLB. Because the Task Builder assumes the OTS is in SYSLIB.OLB, placing it in SYSLIB.OLB is more convenient. With the OTS in F4POTS.OLB, however, you must explicitly specify this file when you task-build a program.

HAVE F77 USE FCS OR RMS BY DEFAULT <FCS> ?

The OTS cannot support both FCS and RMS at the same time; therefore, you must select either one or the other of these file systems. If you have need of indexed files, type RMS, then press RETURN. If you only need the features provided by FCS, accept the default. For more information on OTS options, see Chapters 2 and 3.

USE THE LONG OR SHORT ERROR TEXT MODULE BY DEFAULT <LONG> ?

If you choose the short error-text module, FORTRAN-77 creates complete error reports, but without the one-line English description of the error condition. The PDP-11 FORTRAN-77 User's Guide contains a complete list of OTS error numbers and message text. If you want the long error-text as the system default, press RETURN. Type SHORT if you prefer the short version.

ADDITIONAL CONTROL FILE IS <NONE> ?

Because there are no more control files to process, press RETURN. BUILD starts the installation. As BUILD processes the information from the distribution medium, it prints a log on your terminal, annotated by comment lines. These comments, prefixed by exclamation marks (!), give brief descriptions of each BUILD activity.

CHAPTER 6

INSTALLATION ON IAS USING MCR

This chapter describes the procedures for installing FORTRAN-77 on an IAS operating system using the MCR command language. Read the sections relevant to the type of distribution kit you are using (Section 6.1 for the magnetic-tape distribution; Section 6.2 for the disk-cartridge distribution). Section 6.3 gives instructions for invoking the compiler.

The basic installation procedure for PDP-11 FORTRAN-77 consists of:

1. Building the F77 compiler task from an object-module library
2. Building an F77 OTS library from object modules
3. Copying the diagnostic message files from the distribution medium to the system disk

6.1 INSTALLATION FROM MAGNETIC TAPE DISTRIBUTION

The following sections explain how to build PDP-11 FORTRAN-77 from a magnetic-tape distribution kit.

6.1.1 Preparations

UFD [11,36] is used in building the PDP-11 FORTRAN-77 system; therefore, if this user file directory is not already present on your system, create it on the system device as follows:

```
MCR>UFD SY:[11,36]
```

Now place the distribution magnetic tape, write-locked, on drive 0. and load the magnetic tape handler, if not already resident, as follows (Note that the device mnemonic for some magnetic tape units is MM:. If you are using such a device, substitute MM: for MT: in the following commands.):

```
MCR>LOA MT:
```

Finally, mount the magnetic tape as follows:

```
MCR>MOU MT0:/CHA=[FOR, ATCH]
```

INSTALLATION ON IAS USING MCR

6.1.2 Building the Compiler

You build the F77 compiler from the object-module library supplied on the distribution medium. First, copy the required files from the magnetic tape to the system disk as follows:

```
MCR>FLX SY:[11,36]=MT0:[11,36]F77.OLB
MCR>FLX SY:[11,36]=MT0:[11,36]F7711D.*
```

Then edit compiler task-build command file [11,36]F7711D.CMD to select installation options, as described in Section 2.2 and in Appendix B.

Now build the compiler as follows:

```
MCR>TKB @[11,36]F7711D
```

Retain the edited command files in [11,36] for reference.

6.1.3 Building the OTS

To build the OTS, first copy the required OTS files from the magnetic tape to the system disk as follows:

```
MCR>FLX SY:[11,36]=MT0:[11,37]*.OBJ
```

Now you can build the F77 OTS in either of two ways:

1. One way to build the OTS is to merge the OTS concatenated object modules into an existing library (for example, LB:[1,1]SYSLIB.OLB). If you plan to use the RMS-11 file system and RMSLIB.OLB has already been incorporated into SYSLIB.OLB, you cannot place F4POTS.OLB in SYSLIB.OLB.

First, use the LBR utility program as follows:

```
MCR>LBR LB:[1,1]SYSLIB.OLB/RP=[11,36]F4POTS.OBJ
```

Now use one of the following commands to incorporate either RMS-11 support or FCS-11 support, but not both (see Section 2.3):

```
MCR>LBR LB:[1,1]SYSLIB.OLB/RP=[11,36]FCS11D.OBJ
```

or

```
MCR>LBR LB:[1,1]SYSLIB.OLB/RP=[11,36]RMS11D.OBJ
```

2. The second way to build the OTS is to generate a separate library using the OTS concatenated object modules, as follows (If you build a separate library, you must designate file LB:[1,1]F4POTS.OLB when building a task from modules produced by the PDP-11 FORTRAN-77 compiler.):

```
MCR>LBR LB:[1,1]F4POTS.OLB/CR:150.=[11,36]F4POTS.OBJ
```

Now use one of the following commands to incorporate either RMS-11 support or FCS-11 support, but not both:

```
MCR>LBR LB:[1,1]F4POTS.OLB=[11,36]FCS11D.OBJ
```

or

```
MCR>LBR LB:[1,1]F4POTS.OLB=[11,36]RMS11D.OBJ
```

After completing one of the above, copy the optional OTS modules to the system disk as follows:

```
MCR>FLX LB:[1,1]=MT0:[11,40]*.OBJ,*.ODL,*.MAC,*.FTN
```

INSTALLATION ON IAS USING MCR

6.1.4 Copying the Message Files

At this point, copy the FORTRAN-77 compiler message files to the system disk as follows:

```
MCR>FLX LB:[1,2]=MT0:[1,2]F77COM.MSG/IM:64./BL:14.  
MCR>FLX LB:[1,2]=MT0:[1,2]F77OTS.MSG/IM:64./BL:16.
```

6.2 INSTALLATION FROM DISK CARTRIDGE DISTRIBUTION

The following sections explain how to build PDP-11 FORTRAN-77 from a disk-cartridge distribution kit. If the system disk is not the same device type as that of the distribution disk, place the distribution disk in drive 0. If the system disk is the same device type as that of the distribution disk, use drive 0 for the system disk and drive 1 for the distribution disk. Procedures for these two configurations are the same, except for the different unit assignments.

In the directions that follow, the notation "Dxn" refers to the disk drive unit on which the PDP-11 FORTRAN-77 distribution pack is placed. For this notation, x can take the value K, M, or L, and n can take the value 0 or 1 (on the basis of the system device type). Use DK0 or DK1 for the RK05 distribution; use DM0 or DM1 for the RK06 distribution; and use DL0 or DL1 for the RL01 OR RL02 distribution.

6.2.1 Preparations

UFD [11,36] is used in building the PDP-11 FORTRAN-77 system; therefore, if this user file directory is not already present on your system, create it on the system device as follows, using the following command:

```
MCR>UFD SY:[11,36]
```

Now load the disk handler, if not already resident, as follows:

```
MCR>LOA Dxn:      (not needed if the system device is the same  
                  device type as that of the distribution disk)
```

Finally, place the distribution disk cartridge in drive n, write-locked, and mount the volume as follows:

```
MCR>MOU Dxn:F77
```

6.2.2 Building the Compiler

You build the compiler from the object-module library supplied on the distribution disk. First, copy the compiler build files from the distribution disk to the system disk as follows:

```
MCR>PIP SY:[11,36]=Dxn:[11,36]F7711D.*  
MCR>PIP SY:[11,36]=Dxn:[11,36]F77.OLB
```

Now edit compiler task-build command file [11,36]F7711D.CMD to select installation options, as described in Section 2.2 and in Appendix B.

INSTALLATION ON IAS USING MCR

Edit the compiler overlay-description file [11,36]F7711D.ODL to specify the disk unit on which the distribution disk is mounted, as follows:

```
MCR>EDI SY:[11,36]F7711D.ODL
*PA/SY:/Dxn:/
*EX
```

Now build the compiler as follows:

```
MCR>TKB @[11,36]F7711D
```

Retain the edited command files in [11,36] for reference.

6.2.3 Building the OTS

You can build the F77 OTS in either of two ways:

1. One way to build the OTS is to merge the OTS concatenated object file into an existing library (for example, LB:[1,1]SYSLIB.OLB). If you plan to use the RMS-11 file system and RMSLIB.OLB has already been incorporated into SYSLIB.OLB, you cannot place F4POTS.OLB in SYSLIB.OLB.

First, use the LBR utility program as follows:

```
MCR>LBR LB:[1,1]SYSLIB.OLB/RP=Dxn:[11,37]F4POTS.OBJ
```

Now use one of the following commands to incorporate either RMS-11 support or FCS-11, but not both (see Section 2.3):

```
MCR>LBR LB:[1,1]SYSLIB.OLB/RP=Dxn:[11,37]FCS11D.OBJ
or
MCR>LBR LB:[1,1]SYSLIB.OLB/RP=Dxn:[11,37]RMS11D.OBJ
```

2. The second way to build the OTS is to generate a separate library using the OTS concatenated object modules, as follows: (If you build a separate library, you must designate file LB:[1,1]F4POTS.OLB when building a task from modules produced by the PDP-11 FORTRAN-77 compiler.)

```
MCR>LBR LB:[1,1]F4POTS.OLB/CR:150.=Dxn:[11,37]F4POTS.OBJ
```

Now use one of the following commands to incorporate either RMS-11 support or FCS-11 support, but not both:

```
MCR>LBR LB:[1,1]F4POTS.OLB=Dxn:[11,37]FCS11D.OBJ
or
MCR>LBR LB:[1,1]F4POTS.OLB=Dxn:[11,37]RMS11D.OBJ
```

After completing one of the above, copy the optional OTS modules to the system disk as follows:

```
MCR>PIP LB:[1,1]=Dxn:[11,40]*.OBJ,*.ODL,*.MAC,*.FTN
```

6.2.4 Copying the Message Files

At this point, copy the FORTRAN-77 compiler message files to the system disk as follows:

```
MCR>PIP LB:[1,2]=Dxn:[1,2]F77COM.MSG,F77OTS.MSG
```

6.3 INVOKING THE COMPILER

You invoke the FORTRAN-77 compiler as an MCR function, as follows:

MCR>F77

For more information on making the F77 compiler task available, see Section 2.5.3.

CHAPTER 7

INSTALLATION ON IAS USING DCL

This chapter describes the procedures for installing FORTRAN-77 on an IAS operating system using the DCL command language. Read the sections relevant to the type of distribution kit you are using (Section 7.1 for the magnetic-tape distribution; Section 7.2 for the disk-cartridge distribution). Section 7.3 gives instructions for invoking the compiler.

The basic installation procedure for PDP-11 FORTRAN-77 consists of:

1. Building the F77 compiler task from an object-module library
2. Building an F77 OTS library from object modules
3. Copying the diagnostic message files from the distribution medium to the system disk

7.1 INSTALLATION FROM MAGNETIC TAPE DISTRIBUTION

The following sections explain how to build PDP-11 FORTRAN-77 from a magnetic-tape distribution kit.

7.1.1 Preparations

UFD [11,36] is used in building the FORTRAN-77 system; therefore, if this user file directory is not already present on your system, create it on the system device as follows

```
PDS>CREATE/DIR [11,36]
```

Now place the distribution magnetic tape, write-locked, on drive 0 and load the magnetic tape handler, if not already resident, as follows (Note that the device mnemonic for some magnetic tape units is MM:. If you are using such a device, substitute MM: for MT: in the following commands.):

```
SCI>RUN/HANDLER MT
```

Finally, mount the magnetic tape as follows:

```
PDS>MOUNT/FOREIGN MT0: F77
```

INSTALLATION ON IAS USING DCL

7.1.2 Building the Compiler

You build the F77 compiler from the object-module library supplied on the distribution medium. First, copy the needed files from the magnetic tape to the system disk as follows:

```
PDS>COPY MT0:[11,36]F77.OLB/DO [11,36]*.*
PDS>COPY MT0:[11,36]F77IAS.*/DO [11,36]*.*
```

Now edit compiler task-build command file [11,36]F77IAS.CMD to select installation options, as described in Section 2.2 and in Appendix B.

Then build the compiler as follows:

```
PDS>LINK @[11,36]F77IAS
```

Retain the edited command files in [11,36] for reference.

7.1.3 Building the OTS

To build the OTS, first copy the required OTS files from the magnetic tape to the system disk as follows:

```
PDS>COPY MT0:[11,37]*.OBJ/DO [11,36]*.*
```

You can now build the F77 OTS in either of two ways:

1. One way to build the OTS is to merge the OTS concatenated object modules into an existing library (for example, LB:[1,1]SYSLIB.OLB). If you plan to use the RMS-11 file system and RMSLIB.OLB has already been incorporated into SYSLIB.OLB, you cannot place F4POTS.OLB in SYSLIB.OLB.

First, use the LIBR utility program as follows:

```
PDS>LIBR INSERT LB:[1,1]SYSLIB [11,36]F4POTS
```

Now use one of the following commands to incorporate either RMS-11 support or FCS-11 support, but **not** both (see Section 2.3):

```
PDS>LIBR INSERT LB:[1,1]SYSLIB [11,36]FCSIAS.OBJ
```

or

```
PDS>LIBR INSERT LB:[1,1]SYSLIB [11,36]RMSIAS.OBJ
```

2. The second way to build the OTS is to generate a separate library using the OTS concatenated object modules, as follows (If you build a separate library, you must designate file LB:[1,1]F4POTS.OLB when building a task from modules produced by the PDP-11 FORTRAN-77 compiler.):

```
PDS>LIBR CREATE/SIZE:150 LB:[1,1]F4POTS [11,36]F4POTS
```

Now use one of the following commands to incorporate either RMS-11 support or FCS-11 support, but **not** both:

```
PDS>LIBR INSERT LB:[1,1]F4POTS [11,36]FCSIAS.OBJ
```

or

```
PDS>LIBR INSERT LB:[1,1]F4POTS [11,36]RMSIAS.OBJ
```

INSTALLATION ON IAS USING DCL

After completing one of the above, copy the optional OTS modules to the system disk as follows:

```
PDS>COPY MT0:[11,40]*.OBJ/DO LB:[1,1]*.*
PDS>COPY MT0:[11,40]*.ODL/DO LB:[1,1]*.*
PDS>COPY MT0:[11,40]*.MAC/DO LB:[1,1]*.*
PDS>COPY MT0:[11,40]*.FTN/DO LB:[1,1]*.*
```

7.1.4 Copying the Message Files

At this point, copy the PDP-11 FORTRAN-77 compiler message files to the system disk as follows:

```
PDS>COPY/IMAGE:64 MT0:[1,2]F77COM.MSG/DO LB:[1,2]*.*
PDS>COPY/IMAGE:64 MT0:[1,2]F77OTS.MSG/DO LB:[1,2]*.*
```

7.2 INSTALLATION FROM DISK CARTRIDGE DISTRIBUTION

The following sections explain how to build FORTRAN-77 from a disk-cartridge distribution kit. If the system disk is not the same device type as that of the distribution disk, place the distribution disk in drive 0. If the system disk is the same device type as that of the distribution disk, use drive 0 for the system disk and drive 1 for the distribution disk. Procedures for the two configurations are the same, except for the different unit assignments.

In the directions that follow, the notation "Dxn" refers to the disk drive unit on which the FORTRAN-77 distribution disk is placed. In this notation, x can take the value K, M, or L, and n can take the value 0 or 1. Use DK0 or DK1 for the RK05 distribution; use DM0 or DM1 for the RK06 distribution; and use DL0 or DL1 for the RL01 or RL02 distribution.

7.2.1 Preparations

UFD [11,36] is used in building the PDP-11 FORTRAN-77 system; therefore, if this user file directory is not already present on your system, create it on the system device as follows::

```
PDS>CREATE/DIR [11,36]
```

Now load the disk handler, if not already resident, as follows:

```
SCI>RUN/HANDLER Dx:
```

Finally, place the distribution disk cartridge in drive n (write-locked), and mount the volume as follows:

```
PDS>MOUNT Dxn: F77
```

INSTALLATION ON IAS USING DCL

7.2.2 Building the Compiler

You build the compiler from the object-module library supplied on the distribution disk. First, copy the compiler build files from the distribution disk to the system disk as follows:

```
PDS>COPY Dxn:[11,36]F77IAS.* [11,36]*.*
PDS>COPY Dxn:[11,36]F77.OLB [11,36]*.*
```

Now edit compiler task-build command file [11,36]F77IAS.CMD to select installation options, as described in Section 2.2 and in Appendix B.

Edit the compiler overlay-description file [11,36]F77IAS.ODL to specify the disk unit on which the distribution disk is mounted, as follows:

```
PDS>EDIT [11,36]F77IAS.ODL
*PA/SY:/Dxn:/
*EX
```

Now build the compiler as follows:

```
PDS>LINK @[11,36]F77IAS
```

Retain the edited command files in [11,36] for reference.

7.2.3 Building the OTS

You can build the F77 OTS in either of two ways:

1. One way to build the OTS is to merge the OTS concatenated object modules into an existing library (for example, LB:[1,1]SYSLIB.OLB). If you plan to use the RMS-11 file system and RMSLIB.OLB has already been incorporated into SYSLIB.OLB, you cannot place F4POTS.OLB in SYSLIB.OLB.

First, use the LIBR utility program as follows:

```
PDS>LIBR INSERT LB:[1,1]SYSLIB Dxn:[11,37]F4POTS
```

Now use one of the following commands to incorporate either RMS-11 support or FCS-11 support, but **not** both (see Section 2.3):

```
PDS>LIBR INSERT LB:[1,1]SYSLIB Dxn:[11,37]FCSIAS.OBJ
or
PDS>LIBR INSERT LB:[1,1]SYSLIB Dxn:[11,37]RMSIAS.OBJ
```

2. The second way to build the OTS is to generate a separate library using the OTS concatenated object modules, as follows (If you use a separate library, you must designate file LB:[1,1]F4POTS.OLB when building a task from modules produced by the PDP-11 FORTRAN-77 compiler.)

```
PDS>LIBR CREATE/SIZE:150 LB:[1,1]F4POTS Dxn:[11,37]F4POTS
```

Now use one of the following commands to incorporate either RMS-11 support or FCS-11 support, but **not** both:

```
PDS>LIBR INSERT LB:[1,1]F4POTS Dxn:[11,37]FCSIAS.OBJ
or
PDS>LIBR INSERT LB:[1,1]F4POTS Dxn:[11,37]RMSIAS.OBJ
```

INSTALLATION ON IAS USING DCL

After completing one of the above, copy the optional OTS modules to the system disk as follows:

```
PDS>COPY Dxn:[11,40].OBJ LB:[1,1]*.*
PDS>COPY Dxn:[11,40]*.ODL LB:[1,1]*.*
PDS>COPY Dxn:[11,40]*.MAC LB:[1,1]*.*
PDS>COPY Dxn:[11,40]*.FTN LB:[1,1]*.*
```

7.2.4 Copying the Message Files

At this point, copy the PDP-11 FORTRAN-77 compiler the message files to the system disk as follows:

```
PDS>COPY Dxn:[1,2]*.MSG LB:[1,2]*.*
```

7.3 INVOKING THE COMPILER

You invoke the PDP-11 FORTRAN-77 compiler using the PDS FORTRAN command, if the system default is PDP-11 FORTRAN-77, as follows:

```
PDS>FORTRAN
```

If the compiler is installed as F4P, invoke it as follows:

```
PDS>FORTRAN/F4P
```

Otherwise, you must use MCR to invoke the PDP-11 FORTRAN-77 compiler, as follows:

```
PDS>MCR F77
```

For more information on making the F77 compiler task available, see Section 2.5.4.

CHAPTER 8

SYSTEM BUILD VERIFICATION

The PDP-11 FORTRAN-77 distribution kit includes a simple test program to verify that the system is correctly installed and ready for use.

The test program, F77TST, contains two intentional nonfatal errors: one occurs during compilation and one occurs during execution.

8.1 TEST PROGRAM

To use the test program, first copy file F77TST.FTN from UFD [11,40] of the distribution medium to a user account on the system disk. Then compile, link, and execute the test program as described in this section.

NOTE

If you are using a RSTS/E system, replace all occurrences of LB:[1,1] with LB: in the following commands.

MCR and RSTS/E Commands

The following command sequences show you how to compile, taskbuild, and execute the test program on RSX and RSTS/E systems.

Compile: F77 F77TST=F77TST/TR:ALL

Link: if using an OTS located in SYSLIB,

(if using FCS-11)

TKB F77TST/FP=F77TST

(if using RMS-11)

TKB F77TST/FP=F77TST,LB:[1,1]SYSLIB.OLB/LB,LB:[1,1]RMSLIB/LB

or, if a separate library is used,

(if using FCS-11)

TKB F77TST/FP=F77TST,LB:[1,1]F4POTS/LB

(if using RMS-11)

TKB F77TST/FP=F77TST,LB:[1,1]F4POTS/LB,LB:[1,1]RMSLIB/LB

Execute: RUN F77TST

SYSTEM BUILD VERIFICATION

DCL Commands (for use on IAS)

The following command sequences show you how to compile, taskbuild, and execute the test program on an IAS system using DCL.¹

Compile: FORT/LIST/SWIT: (/TR:ALL) F77TST

Link: if using an OTS located in SYSLIB

```
(if using FCS-11)
LINK/FLOATING F77TST
(if using RMS-11)
LINK/FLOATING F77TST, LB: [1,1]SYSLIB.OLB/LB, LB: [1,1]RMSLIB/LIB
```

or, if a separate library is used,

```
(if using FCS-11)
LINK/FLOATING F77TST LB: [1,1]F4POTS/LIB
(if using RMS-11)
LINK/FLOATING F77TST, LB: [1,1]F4POTS/LIB, LB: [1,1]RMSLIB/LIB
```

Execute: RUN F77TST

8.2 TEST RESULTS

During compilation, an overflow error should occur on source line 6. During execution, a floating zero-divide error should be reported at line 8.

8.3 VERIFICATION PROCEDURE FAILURE

The preceding verification procedure can fail if the FORTRAN-77 system is incorrectly installed. Possible failures include:

- The F77 compiler produces the message:

```
F77 -- FATAL 08 * COMPILER DYNAMIC MEMORY OVERFLOW
```

This message indicates that dynamic memory for the compiler was not correctly allocated by EXTTSK or INS/INC (see Section 3.1.4). Remove and reinstall the compiler with a correct INC value.

- If the compiler message file, LB: [1,2]F77COM.MSG (SY: [1,2]F77COM.MSG for RSTS/E), has not been transferred correctly, the compiler treats the compile-time overflow in F77TST as a fatal error. The compiler does not create object module F77TST.OBJ.

1. You may need an additional compilation switch, for example /F77, according to how FORTRAN-77 was installed.

SYSTEM BUILD VERIFICATION

- For IAS, if the OTS message file, LB:[1,2]F77OTS.MSG, has not been transferred correctly, or if the MO message-output task is not loaded, run-time subroutine traceback information is not produced.
- For RSX-11M and RSX-11M-PLUS, the task exits with OTS error 2, "Task Initialization Failure," if the task builder /FP switch was omitted, or if the operating system does not support a floating-point processor.

CHAPTER 9
RELEASE NOTES

9.1 USING F4PNER WITH F4P11S OR F4PNIO

If you use F4PNER, the optional OTS error-reporting module, with F4P11S or F4PNIO -- other optional OTS modules -- a multiply defined symbol error may result during task-build. Two correct ways to use F4PNER with F4P11S or F4PNIO follow:

- Build F4P11S (or F4PNIO) and F4PNER as separate libraries and use them as follows:

```
TKB>MAIN/FP=MAIN, LB:[1,1]F4PNER/LB: $NERRL,  
LB:[1,1]F4P11S/LB, LB:[1,1]F4POTS/LB
```

- Build an OTS by incorporating F4P11S.OBJ instead of FCS11M.OBJ into F4POTS. Name the resulting library F4P11S.OLB, and build F4PNER as a separate library. Use those libraries as follows:

```
TKB>MAIN/FP=MAIN, LB:[1,1]F4PNER/LB: $NERRL,  
LB:[1,1]F4P11S/LB
```

9.2 INCORRECT FATAL 03 ERROR

If you include in the range of an IMPLICIT CHARACTER statement both the function name and one of the formal parameters, you receive an incorrect error message during compilation. Instead of receiving Error 105 (function or entry name not numeric), you receive the following incorrect error message:

```
FATAL 03 * I/O error on workfile (LUN6)
```

The following program illustrates the illegal use of the IMPLICIT CHARACTER statement that produces the above incorrect error message:

```
FUNCTION FUNC (TIME)  
  IMPLICIT CHARACTER (A-T)  
  RETURN  
END
```

The incorrect error message results because both the function name FUNC and the formal parameter TIME are included in the range of the IMPLICIT CHARACTER statement.

This problem will be corrected in a future release of PDP-11 FORTRAN-77.

RELEASE NOTES

9.3 TASK SIZE INCREASES

The size of some of the OTS modules has been increased to accommodate new ANSI FORTRAN-77 features. The features affected and the amount of increase are listed below. The list indicates the expected increase in size of FORTRAN IV-PLUS V3.0 programs task built with the PDP-11 FORTRAN-77 OTS.

Feature	Task Size Increase
Formatted I/O	375 words
Logical conversion	4 words
Integer conversion	55 words
Real conversion	80 words
Octal conversion	320 words
List-directed input	250 words
List-directed output	40 words
OPEN statement	25 words
Other I/O and initialization modules	55 to 75 words

9.4 RESTRICTION ON OUTPUT OF 0

During output, if the format descriptor nIw.0, nOw.0, or nZw.0 is used and the internal datum is zero, the character 0 is output.

The output field should consist only of blank characters.

This incorrect behavior will be corrected in a future version of PDP-11 FORTRAN-77.

9.5 F77 OTS INSTALLATION

If you want to put the F77 OTS in SYSLIB.OLB, save the original SYSLIB.OLB by renaming it to SYSLIB.OLD. The renaming facilitates recovery of the original SYSLIB if the build is unsuccessful.

APPENDIX A

ALTERNATIVE RSTS/E INSTALLATION

This appendix describes an alternative procedure for installing PDP-11 FORTRAN-77 on a RSTS/E operating system. If you are familiar with RSTS/E command language, you may wish to use the procedure described in Chapter 5, which uses the RSTS/E BUILD program; if you are not, but are familiar with RSX-11M/M-PLUS and command language, the following installation procedure may be more suitable.

The basic installation procedure for PDP-11 FORTRAN-77 consists of:

1. Building the F77 compiler task from an object-module library
2. Building a F77 OTS library from object modules
3. Copying the compiler diagnostic-message file from the distribution medium to the system disk

If your distribution kit is on magnetic tape, refer to Section A.1; if it is on disk cartridge, refer to Section A.2.

A.1 INSTALLATION FROM MAGNETIC TAPE DISTRIBUTION

The following sections describe how to build PDP-11 FORTRAN-77 from a magnetic-tape distribution kit.

A.1.1 Preparations

Before proceeding, check to see if the RT-11 and RSX run-time systems have been added. If they have not been added, add them as follows:

```
RUN SY:[1,2]UTILITY
#ADD RT11
#ADD RSX
```

Now place the distribution tape, write-locked, on a tape drive. Note that the device name for some tape units is MM: or MS:. If you are using such a device, substitute MM: or MS: for MT: in the commands that follow. If you are using 1600 BPI magnetic tape, you must mount the tape as follows:

```
MOUNT MT0:/DENSITY:1600
```

If your magnetic tape distribution is 800 BPI, you do not need to issue a specific mount command.

ALTERNATIVE RSTS/E INSTALLATION

A.1.2 Building the Compiler

You build the compiler from object-module library F77.OLB supplied on the distribution medium.

First, using a privileged account (for example, the account with PPN [1,0]; but preferably not the account with PPN [1,2]), copy the required files from the tape to the system disk, as follows:

```
RUN SY:[1,2]PIP.SAV
*SY:*.*=MT0:[11,36]F77.OLB
*SY:*.*=MT0:[11,36]F77RST.*
```

You can now edit compiler task-build command file F77RST.CMD to select installation options, as described in Section 2.2 and Appendix B.

Now build the compiler as follows:

```
RUN SY:[1,2]TKB.TSK
TKB> @F77RST
```

Then copy the compiler to system library account [1,2], giving it protection code <104>:

```
RUN SY:[1,2]PIP.SAV
*SY:[1,2]F77.TSK<104>=F77.TSK
*SY:F77.TSK/DE (unless you are logged into [1,2])
```

Retain the edited command files for reference.

A.1.3 Building the OTS

To build the OTS, first copy the required OTS files from the tape to the system disk, as follows:

```
RUN SY:[1,2]PIP.SAV
*SY:*.*=MT0:[11,37]*.OBJ
```

You can now build the F77 OTS in either of two ways:

1. One way to build the OTS is to merge the OTS concatenated object modules into an existing library (for example, LB:SYSLIB.OLB). If you plan to use the RMS-11 file system and RMSLIB.OLB has already been incorporated into SYSLIB.OLB, you cannot place F4POTS.OLB in SYSLIB.OLB.

First, invoke and use the LBR utility program as follows, making sure the module name and entry-point tables can accommodate the OTS:

```
RUN SY:[1,2]LBR.TSK
LBR>LB:SYSLIB.OLB/CO:200.:2048.:512.=LB:SYSLIB.OLB
LBR>LB:SYSLIB.OLB=SHORT.OBJ/RP
LBR>LB:SYSLIB.OLB/DG:$ERTXT
LBR>LB:SYSLIB.OLB=F4POTS.OBJ
```

Now use one of the following commands to incorporate RMS-11 or FCS-11 support. You must select only one of these file management systems:

```
LBR>LB:SYSLIB.OLB=RMS11M.OBJ
or
LBR>LB:SYSLIB.OLB=FCS11M.OBJ
```

ALTERNATIVE RSTS/E INSTALLATION

However, you may wish to build two separate OTS libraries, one using FCS-11 and one using RMS-11. (See Section 2.3):

2. The second way to build the OTS is to generate a separate library using the OTS concatenated object modules, as follows (If you build a separate library, you must designate file LB:F4POTS.OLB when building a task from modules produced by the PDP-11 FORTRAN-77 compiler.):

```
RUN SY:[1,2]LBR.TSK
LBR>F4POTS.OLB/CR:150.=SHORT.OBJ
LBR>F4POTS.OLB/DG:$ERTXT
LBR>F4POTS.OLB=F4POTS.OBJ
```

Now use one of the following commands to incorporate RMS-11 or FCS-11 support, as follows:

```
LBR>F4POTS.OLB=RMS11M.OBJ
or
LBR>F4POTS.OLB=FCS11M.OBJ
```

You must select only one of these file management systems; however, you may wish to build two separate OTS libraries, one using FCS-11 and one using RMS-11. (See Section 2.3):

Copy the library to the library account LB:, giving it protection code <40>, as follows:

```
RUN SY:[1,2]PIP.SAV
*LB:F4POTS.OLB<40>=F4POTS.OLB
*F4POTS.OLB/DE
```

After completing one of the above, copy the optional OTS modules to the system disk, as follows:

```
RUN SY:[1,2]PIP.SAV
*LB:*.*=MT0:[11,40]*.OBJ,MT0:[11,40]*.ODL,MT0:[11,40]*.MAC/NO,
MT0:[11,40]*.FTN
```

A.1.4 Copying the Message File

At this point, copy the PDP-11 FORTRAN-77 compiler message file to the system disk, as follows:

```
RUN SY:[1,2]PIP.SAV
*SY:[1,2]*.=MT0:[1,2]F77COM.MSG
```

A.2 INSTALLATION FROM DISK CARTRIDGE DISTRIBUTION

The following section explains how to build PDP-11 FORTRAN-77 from a disk-cartridge distribution kit.

In the directions that follow, logical-unit assignment Dxn: to FP assigns the logical-device name FP: to the drive of the distribution disk. In the assignment, x can take the value K, M, or L, and n can take the value 0, 1 or any available drive. For example, use DK0 or DK1 for the RK05 distribution; use DM0 or DM1 for the RK06 or RK07 distribution; and use DL0 or DL1 for the RL01 or RL02 distribution.

ALTERNATIVE RSTS/E INSTALLATION

A.2.1 Preparations

Before proceeding, check to see if the RT-11 and RSX run-time systems have been added. If they have not been added, include the last two commands in the sequence below.

Now place the distribution disk cartridge in drive n (write-locked), mount the volume, and make the logical assignment shown below, as follows:

```
MOUNT Dxn:F77/RO
```

```
RUN SY:[1,2]UTILTY
#ADD LOGICAL Dxn: FP
#ADD RT11
#ADD RSX
```

A.2.2 Building the Compiler

You build the compiler from object-module library F77.OLB supplied on the distribution medium. First, using a privileged account (for example, the account with UIC[1,1]; but preferably **not** the one with UIC[1,2]), copy the required files from the distribution disk to the system disk, as follows:

```
RUN SY:[1,2]PIP.SAV
*SY:*.*=FP:[11,36]F77.OLB
*SY:*.*=FP:[11,36]F77RST.*
```

You can now edit compiler task-build command file F77RST.CMD to select installation options, as described in Section 2.2 and Appendix B.

Now build the compiler as follows:

```
RUN SY:[1,2]TKB.TSK
TKB> @F77RST
```

Then copy the compiler to system library account [1,2], giving it protection code <104>, as follows:

```
RUN SY:[1,2]PIP.SAV
*SY:[1,2]F77.TSK<104>=F77.TSK
*SY:F77.TSK/DE (unless you are logged into [1,2])
```

Retain the edited command files for reference.

A.2.3 Building the OTS

You can build the F77 OTS in either of two ways:

1. One way to build the OTS is to merge the OTS concatenated object modules into an existing library (for example LB:SYSLIB.OLB). If you plan to use the RMS-11 file system and RMSLIB.OLB has already been incorporated into SYSLIB.OLB, you cannot place F4POTS.OLB in SYSLIB.OLB.

ALTERNATIVE RSTS/E INSTALLATION

First, invoke and use the LBR utility program as follows, making sure the module name and entry-point tables can accommodate the OTS:

```
RUN SY:[1,2]LBR.TSK
LBR>LB:SYSLIB.OLB/CO:200.:2048.:512.=LB:SYSLIB.OLB
LBR>LB:SYSLIB.OLB=FP:[11,37]SHORT.OBJ/RP
LBR>LB:SYSLIB.OLB/DG:$ERTXT
LBR>LB:SYSLIB.OLB=FP:[11,37]F4POTS.OBJ
```

Now use one of the following commands to incorporate RMS-11 or FCS-11 support (see Section 2.3):

```
LBR>LB:SYSLIB.OLB=FP:[11,37]RMS11M.OBJ
```

or

```
LBR>LB:SYSLIB.OLB=FP:[11,37]FCS11M.OBJ
```

You must select only one of these file management systems; however, you may wish to build two separate OTS libraries, one using FCS-11 and one using RMS-11.

2. The second way to build the OTS is to generate a separate library using the OTS concatenated object modules, as follows. (If you build a separate library, you must designate the file LB:F4POTS.OLB when building a task from modules produced by the PDP-11 FORTRAN-77 compiler.)

```
RUN SY:[1,2]LBR.TSK
LBR>F4POTS.OLB/CR:150.=FP:[11,37]SHORT.OBJ
LBR>F4POTS.OLB/DG:$ERTXT
LBR>F4POTS.OLB=FP:[11,37]F4POTS.OBJ
```

Now use one of the following commands to incorporate RMS-11 or FCS-11 support. (See Section 2.3).

```
LBR>F4POTS.OLB=FP:[11,37]RMS11M.OBJ
```

or

```
LBR>F4POTS.OLB=FP:[11,37]FCS11M.OBJ
```

You must select only one of these file management systems; however, you may wish to build two separate OTS libraries, one using FCS-11 and one using RMS-11.

Copy the library to the library account LB:, giving it protection code <40>:

```
RUN SY:[1,2]PIP.SAV
*LB:F4POTS.OLB<40>=F4POTS.OLB
*F4POTS.OLB/DE
```

After completing one of the above, copy the optional OTS modules to the system disk, as follows:

```
RUN SY:[1,2]PIP.SAV
*LB:*.*=FP:[11,40]*.OBJ,FP:[11,40]*.ODL,FP:[11,40]*.MAC,
FP:[11,40]*.FTN
```

ALTERNATIVE RSTS/E INSTALLATION

A.2.4 Copying the Message File

At this point, copy the F77 compiler message files to the system disk, as follows:

```
RUN SY:[1,2]PIP.SAV
*SY:[1,2]*.*=FP:[1,2]F77COM.MSG
```

A.3 INVOKING THE COMPILER

You can invoke the F77 compiler in one of two ways:

- If installed as a CCL command (see Section 2.5.2), you invoke the compiler with:

```
F77
```

- If the compiler is not installed, you invoke it as follows:

```
RUN SY:[1,2]F77.TSK
```


APPENDIX B
COMPILER TASK-BUILD FILES

B.1 PDP-11 FORTRAN-77 COMPILER TASK-BUILD FILE FOR RSX-11M/M-PLUS
(F7711M.CMD)

```
F77/CP/-FP,[11,36]F77/SP=[11,36]F7711M.ODL/MP
;
; PDP-11 FORTRAN-77 COMPILER TASK BUILD FILE
;
; PDP-11 FORTRAN-77 VERSION 4
;     RSX-11M VERSION 3.2
;     RSX-11M-PLUS VERSION 1
;
; SUMMARY OF SYSTEM PARAMETERS:
;     REFERENCES PARTITION "GEN"
;     24k COMPILER TASK
;     512 WORD STACK
;     32 FRAMES IN EXPRESSION ANALYZER STACK
;     20 FRAMES IN DO/BLOCK IF STATEMENT STACK
;     45 COMMON BLOCKS, MAXIMUM
;     12 RESIDENT PAGES FOR WORKFILE SYSTEM
;
;
; OPTION INPUT
;
TASK      =...F77

; BUILD FOR PARTITION "GEN", MAPPED 11M SYSTEM
; PARTITION MUST BE AT LEAST 22K
;
PAR       =GEN

; SP STACK OF 512 WORDS
; STACK MUST NEVER BE LESS THAN 384 WORDS
;
STACK     =512

; F77 COMPILER LOGICAL UNIT ASSIGNMENTS
;
;     1  COMMAND INPUT
;     2  COMMAND OUTPUT
;     3  .OBJ OUTPUT
;     4  .LST OUTPUT
;     5  .FTN INPUT
;
;     6  COMPILER WORKFILE      (RANDOM ACCESS)
;     CAN BE REASSIGNED TO SWAPPING DISK IF AVAILABLE
;     DISK MUST BE MOUNTED AS WRITABLE FILES-11 VOLUME,
;     BUT THE WORKFILE DOES NOT REQUIRE A UFD ON THE VOLUME.
;
;     7  COMPILER TEMP FILES   (SEQUENTIAL ACCESS)
;     8  DISK MUST BE MOUNTED AS WRITABLE FILES-11 VOLUME,
;     BUT THE TEMP FILES DO NOT REQUIRE A UFD ON THE VOLUME.
;
;
```

COMPILER TASK-BUILD FILES

```

;          9  COMPILER MESSAGE TEXT FILE
;
UNITS      =9
ASG        =TI:1,TI:2
ASG        =SY0:6,SY0:7,SY0:8
ASG        =LB0:9

; RESIDENT MEMORY FOR WORKFILE VIRTUAL MEMORY SYSTEM
;
; UNDER RSX-11M/M-PLUS WORKFILE RESIDENT MEMORY IS DYNAMICALLY DETERMINED.
; IF THE OPERATING SYSTEM SUPPORTS DYNAMIC MEMORY ALLOCATION,
; THE SIZE OF THE COMPILER DYNAMIC STORAGE IS DETERMINED BY "EXTTSK".
; OTHERWISE, THE COMPILER WILL USE ALL MEMORY AVAILABLE IN THE PARTITION.
;
; INCREASING THE NUMBER OF RESIDENT WORKFILE PAGES WILL MAKE THE COMPILER
; RUN FASTER BY REDUCING PAGING I/O, BUT IT DOES NOT AFFECT THE SIZE
; OF THE MAXIMUM SOURCE PROGRAM WHICH CAN BE COMPILED.
;
EXTTSK     =3840

; F77 USES CONTROL SECTION "STACK1" FOR:
;     EXPRESSION ANALYZER STACK DURING PASS 1
;     NAMED COMMON BLOCK DEFINITIONS IN LATER PASSES
;
; AS DEFINED BELOW, STACK1 IS 312(10) WORDS, PROVIDING:
;     312/8   = 39 EXPRESSION ANALYZER STACK FRAMES
;     312/6   = 52 CONTROL SECTIONS
;             UP TO 7 CONTROL SECTIONS MAY BE USED FOR
;             COMPILER-GENERATED CODE AND DATA, LEAVING 45 COMMON BLOCKS.
;
EXTSCT     =STACK1:1160

; F77 USES CONTROL SECTION "DOSTK1" FOR:
;     DO STATEMENT NESTING STACK DURING PASS 1
;
; AS DEFINED BELOW, DOSTK1 IS 60(10) WORDS, PROVIDING:
;     60/3    = 20 NESTED DO/BLOCK IF STATEMENTS
;
EXTSCT     =DOSTK1:170

; DEFINE PRINTER WIDTH AND NUMBER OF SOURCE LINES PER LISTING PAGE
; F77 DEFAULT VALUES ARE:
;     55 SOURCE LINES PER PAGE (PLUS 3 LINES OF HEADING)
;     132 COLUMN LINE PRINTER
; NOTE:
;     55(10) = 67(8)
;     80(10) = 120(8)           132(10) = 204(8)
;
GBLPAT     =FORTRN:LPLINE:67
GBLPAT     =FORTRN:LPWIDTH:204

; DEFINE DEFAULT OUTPUT FILE SUPERCEDE BEHAVIOR: A VALUE OF 0 (DEFAULT)
; INDICATES THAT THE COMPILER SHOULD NOT SUPERCEDE OUTPUT LISTING AND
; OBJECT FILES; A VALUE OF 1 ALLOWS SUPERCEDING.
;
GBLPAT     =COMAND:SUP00:0

; DEFINITION OF COMPILER SWITCH OPTION VALUES
;
; A COMPLETE DESCRIPTION OF THE EFFECTS OF THE COMPILER OPTION SWITCHES
; IS CONTAINED IN SECTION 1.2 OF THE PDP-11 FORTRAN-77 USER'S GUIDE.
;

```

COMPILER TASK-BUILD FILES

SWITCH NAME -----	SWITCH SETTING -----	VALUE TO GBLPAT -----	
CK	/-CK	0	
	/CK	1	ARRAY SUBSCRIPT BOUNDS CHECKING
CO	/CO:19.	23	NUMBER OF CONTINUATION LINES
	/CO:N.	N	
DE	/-DE	0	
	/DE	1	INCLUDE DEBUG LINES
I4	/-I4	0	DEFAULT INTEGER*2
	/I4	1	DEFAULT INTEGER*4
LA	/-LA	0	REINITIALIZE SWITCHES
	/LA	1	
LI	/LI:0	0	
	/LI:1	1	SOURCE
	/LI:2	2	SOURCE, MAP
	/LI:3	3	SOURCE, MAP, GENERATED CODE
RO	/-RO	0	R/W CODE SECTIONS
	/RO	1	R/O CODE SECTIONS
SP	/-SP	0	NO SPOOLING
	/SP	1	SPOOLING
TR	/-TR	0	
	/TR:NONE	0	
	/TR:NAMES	1	
	/TR:BLOCKS	3	
	/TR:ALL	7	
	/TR	7	
WF	/WF:2	2	NUMBER OF TEMPORARY FILES
	/WF:N	1, 2, 3	
WR	/-WR	0	NO OPTIONAL WARNINGS
	/WR	1	
F77	/-F77	0	FORTTRAN 66 INTERPRETATION
	/F77	1	FORTTRAN 77 INTERPRETATION

THE FOLLOWING "GBLPAT" DEFINITIONS EFFECT DEFAULTS OF:
 /-CK/CO:19./-DE/-I4/-LA/LI:2/-RO/SP/TR:BLOCKS/WF:2/WR/F77
 DEFAULT VALUES FOR SWITCH "XX" ARE DEFINED
 BY A "GBLPAT" TO GLOBAL VARIABLE "XX000".

```

GBLPAT  =FORTRN:LA000:0
GBLPAT  =COMAND:CK000:0
GBLPAT  =COMAND:CO000:23
GBLPAT  =COMAND:DE000:0
GBLPAT  =COMAND:I4000:0
GBLPAT  =COMAND:LI000:2
GBLPAT  =COMAND:RO000:0
GBLPAT  =COMAND:SP000:1
GBLPAT  =COMAND:TR000:3
GBLPAT  =COMAND:WF000:2
GBLPAT  =COMAND:WR000:1
GBLPAT  =COMAND:F7700:1
/

```

COMPILER TASK-BUILD FILES

B.2 PDP-11 FORTRAN-77 COMPILER TASK-BUILD FILE FOR RSTS/E (F77RST.CMD)

```

F77/CP/-FP, F77= F77RST.ODL/MP
;
; PDP-11 FORTRAN-77 COMPILER TASK BUILD FILE
;
; PDP-11 FORTRAN-77 VERSION 4
;     RSTS/E VERSION 7.0
;
; SUMMARY OF SYSTEM PARAMETERS:
;     REFERENCES PARTITION "GEN"
;     24K COMPILER TASK
;     512 WORD STACK
;     39 FRAMES IN EXPRESSION ANALYZER STACK
;     20 FRAMES IN DO/BLOCK IF STATEMENT STACK
;     45 COMMON BLOCKS, MAXIMUM
;     12 RESIDENT PAGES FOR WORKFILE SYSTEM
;
;
; OPTION INPUT
;
TASK      =...F77

; The RSX-11M Emulator must
; BUILD FOR PARTITION "GEN", MAPPED 11M SYSTEM
; PARTITION MUST BE AT LEAST 28K
;
PAR        =GEN

; SP STACK OF 512 WORDS
; STACK MUST NEVER BE LESS THAN 384 WORDS
;
STACK      =512

; F77 COMPILER LOGICAL UNIT ASSIGNMENTS
;     1  COMMAND INPUT
;     2  COMMAND OUTPUT
;     3  .OBJ OUTPUT
;     4  .LST OUTPUT
;     5  .FTN INPUT
;
;     6  COMPILER WORKFILE      (RANDOM ACCESS)
;     CAN BE REASSIGNED TO SWAPPING DISK IF AVAILABLE
;     DISK MUST BE MOUNTED AS WRITABLE VOLUME,
;     BUT THE WORKFILE DOES NOT REQUIRE A UFD ON THE VOLUME.
;
;     7  COMPILER TEMP FILES   (SEQUENTIAL ACCESS)
;     8  DISK MUST BE MOUNTED AS WRITABLE FILES-11 VOLUME,
;     BUT THE TEMP FILES DO NOT REQUIRE A UFD ON THE VOLUME.
;
;     9  COMPILER MESSAGE TEXT FILE
;
UNITS      =9
ASG        =TI:1,TI:2
ASG        =SY0:6,SY0:7,SY0:8
ASG        =SY:9

; RESIDENT MEMORY FOR WORKFILE VIRTUAL MEMORY SYSTEM
;
;
; INCREASING THE NUMBER OF RESIDENT WORKFILE PAGES WILL MAKE THE COMPILER
; RUN FASTER BY REDUCING PAGING I/O, BUT IT DOES NOT AFFECT THE SIZE
; OF THE MAXIMUM SOURCE PROGRAM WHICH CAN BE COMPILED.

```

COMPILER TASK-BUILD FILES

```

;
EXTTSK  =3840

; F77 USES CONTROL SECTION "STACK1" FOR:
;     EXPRESSION ANALYZER STACK DURING PASS 1
;     NAMED COMMON BLOCK DEFINITIONS IN LATER PASSES
;
; AS DEFINED BELOW, STACK1 IS 312(10) WORDS, PROVIDING:
;     312/8   = 39 EXPRESSION ANALYZER STACK FRAMES
;     312/6   = 52 CONTROL SECTIONS
;             UP TO 7 CONTROL SECTIONS MAY BE USED FOR
;             COMPILER-GENERATED CODE AND DATA, LEAVING 45 COMMON BLOCKS.
;
EXTSCT  =STACK1:1160

; F77 USES CONTROL SECTION "DOSTK1" FOR:
;     DO STATEMENT NESTING STACK DURING PASS 1
;
; AS DEFINED BELOW, DOSTK1 IS 60(10) WORDS, PROVIDING:
;     60/3    = 20 NESTED DO/BLOCK IF STATEMENTS
;
EXTSCT  =DOSTK1:170

; DEFINE PRINTER WIDTH AND NUMBER OF SOURCE LINES PER LISTING PAGE
; F77 DEFAULT VALUES ARE:
;     55 SOURCE LINES PER PAGE (PLUS 3 LINES OF HEADING)
;     132 COLUMN LINE PRINTER
; NOTE:
;     55(10) = 67(8)
;     80(10) = 120(8)           132(10) = 204(8)
;
GBLPAT  =F0RTRN:LPLINE:67
GBLPAT  =F0RTRN:LPWDTH:204

; DEFINE DEFAULT OUTPUT FILE SUPERCEDE BEHAVIOR: A VALUE OF 0 (DEFAULT)
; INDICATES THAT THE COMPILER SHOULD NOT SUPERCEDE OUTPUT LISTING AND
; OBJECT FILES; A VALUE OF 1 ALLOWS SUPERCEDING.
;
GBLPAT  =COMAND:SUP00:0

; DEFINITION OF COMPILER SWITCH OPTION VALUES
;
; A COMPLETE DESCRIPTION OF THE EFFECTS OF THE COMPILER OPTION SWITCHES
; IS CONTAINED IN SECTION 1.2 OF THE PDP-11 FORTRAN-77 USER'S GUIDE.
;
; SWITCH          SWITCH          VALUE TO GBLPAT
; NAME           SETTING
; -----
;
; CK              /-CK            0
;                 /CK            1          ARRAY SUBSCRIPT BOUNDS CHECKING
;
; CO              /CO:19.         23          NUMBER OF CONTINUATION LINES
;                 /CO:N.         N
;
; DE              /-DE            0
;                 /DE            1          INCLUDE DEBUG LINES
;
; I4              /-I4            0          DEFAULT INTEGER*2
;                 /I4            1          DEFAULT INTEGER*4
;
; LA              /-LA            0          REINITIALIZE SWITCHES
;                 /LA            1
;

```

COMPILER TASK-BUILD FILES

```

; LI          /LI:0          0
;             /LI:1          1      SOURCE
;             /LI:2          2      SOURCE, MAP
;             /LI:3          3      SOURCE, MAP, GENERATED CODE
;
; RO          /-RO           0      R/W CODE SECTIONS
;             /RO            1      R/O CODE SECTIONS
;
; SP          /-SP           0      NO SPOOLING
;             /SP            1      SPOOLING
;
; TR          /-TR           0
;             /TR:NONE        0
;             /TR:NAMES       1
;             /TR:BLOCKS      3
;             /TR:ALL         7
;             /TR             7
;
; WF          /WF:2          2      NUMBER OF TEMPORARY FILES
;             /WF:N           1,2,3
;
; WR          /-WR           0      NO OPTIONAL WARNINGS
;             /WR            1
;
; F77         /-F77          0      FORTRAN 66 INTERPRETATION
;             /F77           1      FORTRAN 77 INTERPRETATION
;
;
; THE FOLOWING "GBLPAT" DEFINITIONS EFFECT DEFAULTS OF:
;
; /-CK/CO:19./-DE/-I4/-LA/LI:2/-RO/SP/TR:BLOCKS/WF:2/WR/F77
;
; DEFAULT VALUES FOR SWITCH "XX" ARE DEFINED
; BY A "GBLPAT" TO GLOBAL VARIABLE "XX000".

GBLPAT  =FORTRN:LA000:0
GBLPAT  =COMAND:CK000:0
GBLPAT  =COMAND:CO000:23
GBLPAT  =COMAND:DE000:0
GBLPAT  =COMAND:I4000:0
GBLPAT  =COMAND:LI000:2
GBLPAT  =COMAND:RO000:0
GBLPAT  =COMAND:SP000:1
GBLPAT  =COMAND:TR000:3
GBLPAT  =COMAND:WF000:2
GBLPAT  =COMAND:WR000:1
GBLPAT  =COMAND:F7700:1
//

```

COMPILER TASK-BUILD FILES

B.3 PDP-11 FORTRAN-77 COMPILER TASK BUILD FILE FOR IAS USING MCR (F7711D.CMD)

```
[11,1]F77/CP/-FP/RW/MU,[11,36]F77/SP=[11,36]F7711D.ODL/MP
;
; PDP-11 FORTRAN-77 COMPILER TASK BUILD FILE
;
; PDP-11 FORTRAN-77 VERSION 4
; IAS VERSION 3.1 USING MCR
;
; SUMMARY OF SYSTEM PARAMETERS:
;     USES SYSTEM RESIDENT LIBRARY "SYSRES"
;     24K COMPILER TASK
;     512 WORD STACK
;     39 FRAMES IN EXPRESSION ANALYZER STACK
;     20 FRAMES IN DO/BLOCK IF STATEMENT STACK
;     45 COMMON BLOCKS, MAXIMUM
;     12 RESIDENT PAGES FOR WORKFILE SYSTEM
;
;
; OPTION INPUT
;
TASK      =...F77
LIBR      =SYSRES:RO
POOL      =100

; SP STACK OF 512 WORDS
; STACK MUST NEVER BE LESS THAN 384 WORDS
;
STACK     =512

; F77 COMPILER LOGICAL UNIT ASSIGNMENTS
;
;     1  COMMAND INPUT
;     2  COMMAND OUTPUT
;     3  .OBJ OUTPUT
;     4  .LST OUTPUT
;     5  .FTN INPUT
;
;     6  COMPILER WORKFILE      (RANDOM ACCESS)
;     CAN BE REASSIGNED TO SWAPPING DISK IF AVAILABLE
;     DISK MUST BE MOUNTED AS WRITABLE FILES-11 VOLUME,
;     BUT THE WORKFILE DOES NOT REQUIRE A UFD ON THE VOLUME.
;
;     7  COMPILER TEMP FILES   (SEQUENTIAL ACCESS)
;     8  DISK MUST BE MOUNTED AS WRITABLE FILES-11 VOLUME,
;     BUT THE TEMP FILES DO NOT REQUIRE A UFD ON THE VOLUME.
;
;     9  COMPILER MESSAGE TEXT FILE
;
UNITS     =9
ASG       =TI:1,TI:2
ASG       =SY0:6,SY0:7,SY0:8
ASG       =LB0:9

; RESIDENT MEMORY FOR WORKFILE VIRTUAL MEMORY SYSTEM
;
; UNDER IAS WORKFILE RESIDENT MEMORY IS DYNAMICALLY ALLOCATED
; BY THE COMPILER BASED ON A PARAMETER SPECIFIED BY "EXTTSK".
; THIS VALUE MAY BE OVERRIDDEN AT INSTALL BY "INSTALL F77/INC=NNNN".
;
; INCREASING THE NUMBER OF RESIDENT WORKFILE PAGES WILL MAKE THE COMPILER
; RUN FASTER BY REDUCING PAGING I/O, BUT IT DOES NOT AFFECT THE SIZE
; OF THE MAXIMUM SOURCE PROGRAM WHICH CAN BE COMPILED.
;
EXTTSK    =3840
```

COMPILER TASK-BUILD FILES

```

; F77 USES CONTROL SECTION "STACK1" FOR:
;     EXPRESSION ANALYZER STACK DURING PASS 1
;     NAMED COMMON BLOCK DEFINITIONS IN LATER PASSES
;
; AS DEFINED BELOW, STACK1 IS 312(10) WORDS, PROVIDING:
;     312/8   = 39 EXPRESSION ANALYZER STACK FRAMES
;     312/6   = 52 CONTROL SECTIONS
;             UP TO 7 CONTROL SECTIONS MAY BE USED FOR
;             COMPILER-GENERATED CODE AND DATA, LEAVING 45 COMMON BLOCKS.
;

```

EXTSCT =STACK1:1160

```

; F77 USES CONTROL SECTION "DOSTK1" FOR:
;     DO STATEMENT NESTING STACK DURING PASS 1
;
; AS DEFINED BELOW, DOSTK1 IS 60(10) WORDS, PROVIDING:
;     60/3    = 20 NESTED DO/BLOCK IF STATEMENTS
;

```

EXTSCT =DOSTK1:170

```

; DEFINE PRINTER WIDTH AND NUMBER OF SOURCE LINES PER LISTING PAGE
; F77 DEFAULT VALUES ARE:
;     55 SOURCE LINES PER PAGE (PLUS 3 LINES OF HEADING)
;     132 COLUMN LINE PRINTER
; NOTE:
;     55(10) = 67(8)
;     80(10) = 120(8)      132(10) = 204(8)
;

```

```

GBLPAT =FORTRN:LPLINE:67
GBLPAT =FORTRN:LPWIDTH:204

```

```

; DEFINE DEFAULT OUTPUT FILE SUPERCEDE BEHAVIOR: A VALUE OF 0 (DEFAULT)
; INDICATES THAT THE COMPILER SHOULD NOT SUPERCEDE OUTPUT LISTING AND
; OBJECT FILES; A VALUE OF 1 ALLOWS SUPERCEDING.
;

```

GBLPAT =COMAND:SUP00:0

```

; DEFINITION OF COMPILER SWITCH OPTION VALUES
;
; A COMPLETE DESCRIPTION OF THE EFFECTS OF THE COMPILER OPTION SWITCHES
; IS CONTAINED IN SECTION 1.2 OF THE PDP-11 FORTRAN-77 USER'S GUIDE.
;

```

SWITCH NAME	SWITCH SETTING	VALUE TO GBLPAT	
-----	-----	-----	
CK	/-CK	0	
	/CK	1	ARRAY SUBSCRIPT BOUNDS CHECKING
CO	/CO:19.	23	NUMBER OF CONTINUATION LINES
	/CO:N.	N	
DE	/-DE	0	
	/DE	1	INCLUDE DEBUG LINES
I4	/-I4	0	DEFAULT INTEGER*2
	/I4	1	DEFAULT INTEGER*4
LA	/-LA	0	REINITIALIZE SWITCHES
	/LA	1	
LI	/LI:0	0	
	/LI:1	1	SOURCE
	/LI:2	2	SOURCE, MAP
	/LI:3	3	SOURCE, MAP, GENERATED CODE

COMPILER TASK-BUILD FILES

```

; RO          /-RO          0          R/W CODE SECTIONS
;             /RO           1          R/O CODE SECTIONS
;
; SP          /-SP          0          NO SPOOLING
;             /SP           1          SPOOLING
;
; TR          /-TR          0
;             /TR:NONE      0
;             /TR:NAMES     1
;             /TR:BLOCKS    3
;             /TR:ALL       7
;             /TR           7
;
; WF          /WF:2         2          NUMBER OF TEMPORARY FILES
;             /WF:N         1,2,3
;
; WR          /-WR          0          NO OPTIONAL WARNINGS
;             /WR           1
;
; F77         /-F77         0          FORTRAN 66 INTERPRETATION
;             /F77          1          FORTRAN 77 INTERPRETATION
;

```

; THE FOLOWING "GBLPAT" DEFINITIONS EFFECT DEFAULTS OF:

; /-CK/CO:19./-DE/-I4/-LA/LI:2/-RO/SP/TR:BLOCKS/WF:2/WR/F77

; DEFAULT VALUES FOR SWITCH "XX" ARE DEFINED
; BY A "GBLPAT" TO GLOBAL VARIABLE "XX000".

```

GBLPAT  =FORTRN:LA000:0
GBLPAT  =COMAND:CK000:0
GBLPAT  =COMAND:CO000:23
GBLPAT  =COMAND:DE000:0
GBLPAT  =COMAND:I4000:0
GBLPAT  =COMAND:LI000:2
GBLPAT  =COMAND:RO000:0
GBLPAT  =COMAND:SP000:1
GBLPAT  =COMAND:TR000:3
GBLPAT  =COMAND:WF000:2
GBLPAT  =COMAND:WR000:1
GBLPAT  =COMAND:F7700:1
/

```

B.4 PDP-11 FORTRAN-77 COMPILER TASK BUILD FILE FOR IAS USING DCL
(F77IAS.CMD)

```
/TASK:[11,1]F77/MAP:[11,36]F77/OVERLAY:[11,36]F77IAS-  
/OPTIONS/MULTIUSER/NOFLOATING/CHECKPOINT/READ_WRITE  
!  
! PDP-11 FORTRAN-77 COMPILER TASK BUILD FILE  
!  
! PDP-11 FORTRAN-77 VERSION 4.0  
! IAS VERSION 3.1 USING PDS  
!  
! SUMMARY OF SYSTEM PARAMETERS:  
!     USES SYSTEM RESIDENT LIBRARY "SYSRES"  
!     24K COMPILER TASK  
!     512 WORD STACK  
!     39 FRAMES IN EXPRESSION ANALYZER STACK  
!     20 FRAMES IN DO/BLOCK IF STATEMENT STACK  
!     45 COMMON BLOCKS, MAXIMUM  
!     12 RESIDENT PAGES FOR WORKFILE SYSTEM  
!  
!  
! OPTION INPUT  
!  
TASK      =...F77  
LIBR      =SYSRES:RO  
POOL      =100  
!  
! SP STACK OF 512 WORDS  
! STACK MUST NEVER BE LESS THAN 384 WORDS  
!  
STACK     =512  
!  
! F77 COMPILER LOGICAL UNIT ASSIGNMENTS  
!  
!     1  COMMAND INPUT  
!     2  COMMAND OUTPUT  
!     3  .OBJ OUTPUT  
!     4  .LST OUTPUT  
!     5  .FTN INPUT  
!  
!     6  COMPILER WORKFILE      (RANDOM ACCESS)  
!     CAN BE REASSIGNED TO SWAPPING DISK IF AVAILABLE  
!     DISK MUST BE MOUNTED AS WRITABLE FILES-11 VOLUME,  
!     BUT THE WORKFILE DOES NOT REQUIRE A UFD ON THE VOLUME.  
!  
!     7  COMPILER TEMP FILES   (SEQUENTIAL ACCESS)  
!     8  DISK MUST BE MOUNTED AS WRITABLE FILES-11 VOLUME,  
!     BUT THE TEMP FILES DO NOT REQUIRE A UFD ON THE VOLUME.  
!  
!     9  COMPILER MESSAGE TEXT FILE  
!  
UNITS     =9  
ASG       =TI:1,TI:2  
ASG       =SP0:6,SP0:7,SP0:8  
ASG       =LB0:9  
!  
! RESIDENT MEMORY FOR WORKFILE VIRTUAL MEMORY SYSTEM  
!  
! UNDER IAS WORKFILE RESIDENT MEMORY IS DYNAMICALLY ALLOCATED  
! BY THE COMPILER BASED ON A PARAMETER SPECIFIED BY "EXTTSK".  
! THIS VALUE MAY BE OVERRIDDEN AT INSTALL BY "INSTALL/INC:NNNN [11,1]F77".  
!  
! INCREASING THE NUMBER OF RESIDENT WORKFILE PAGES WILL MAKE THE COMPILER  
! RUN FASTER BY REDUCING PAGING I/O, BUT IT DOES NOT AFFECT THE SIZE  
! OF THE MAXIMUM SOURCE PROGRAM WHICH CAN BE COMPILED.
```

COMPILER TASK-BUILD FILES

```

!
EXTTSK  =3840
!
! F77 USES CONTROL SECTION "STACK1" FOR:
!     EXPRESSION ANALYZER STACK DURING PASS 1
!     NAMED COMMON BLOCK DEFINITIONS IN LATER PASSES
!
! AS DEFINED BELOW, STACK1 IS 312(10) WORDS, PROVIDING:
!     312/8   = 39 EXPRESSION ANALYZER STACK FRAMES
!     312/6   = 52 CONTROL SECTIONS
!             UP TO 7 CONTROL SECTIONS MAY BE USED FOR
!             COMPILER-GENERATED CODE AND DATA, LEAVING 45 COMMON BLOCKS.
!
EXTSCT  =STACK1:1160
!
! F77 USES CONTROL SECTION "DOSTK1" FOR:
!     DO STATEMENT NESTING STACK DURING PASS 1
!
! AS DEFINED BELOW, DOSTK1 IS 60(10) WORDS, PROVIDING:
!     60/3    = 20 NESTED DO/BLOCK IF STATEMENTS
!
EXTSCT  =DOSTK1:170
!
! DEFINE PRINTER WIDTH AND NUMBER OF SOURCE LINES PER LISTING PAGE
! F77 DEFAULT VALUES ARE:
!     55 SOURCE LINES PER PAGE (PLUS 3 LINES OF HEADING)
!     132 COLUMN LINE PRINTER
! NOTE:
!     55(10) = 67(8)
!     80(10) = 120(8)      132(10) = 204(8)
!
GBLPAT  =FORTRN:LPLINE:67
GBLPAT  =FORTRN:LPWIDTH:204
!
! DEFINE DEFAULT OUTPUT FILE SUPERCEDE BEHAVIOR: A VALUE OF 0 (DEFAULT)
! INDICATES THAT THE COMPILER SHOULD NOT SUPERCEDE OUTPUT LISTING AND
! OBJECT FILES! A VALUE OF 1 ALLOWS SUPERCEDING.
!
GBLPAT  =COMAND:SUP00:0
!
! DEFINITION OF COMPILER SWITCH OPTION VALUES
!
! A COMPLETE DESCRIPTION OF THE EFFECTS OF THE COMPILER OPTION SWITCHES
! IS CONTAINED IN SECTION 1.2 OF THE PDP-11 FORTRAN-77 USER'S GUIDE.
!
! SWITCH          SWITCH          VALUE TO GBLPAT
! NAME            SETTING
! -----
! CK              /-CK            0
!                /CK             1      ARRAY SUBSCRIPT BOUNDS CHECKING
!
! CO              /CO:19.         23     NUMBER OF CONTINUATION LINES
!                /CO:N.          N
!
! DE              /-DE            0
!                /DE             1      INCLUDE DEBUG LINES
!
! I4              /-I4            0      DEFAULT INTEGER*2
!                /I4             1      DEFAULT INTEGER*4
!
! LA              /-LA            0      REINITIALIZE SWITCHES
!                /LA             1
!

```

COMPILER TASK-BUILD FILES

```

! LI          /LI:0          0
!             /LI:1          1      SOURCE
!             /LI:2          2      SOURCE, MAP
!             /LI:3          3      SOURCE, MAP, GENERATED CODE
!
! RO          /-RO           0      R/W CODE SECTIONS
!             /RO            1      R/O CODE SECTIONS
!
! SP          /-SP           0      NO SPOOLING
!             /SP            1      SPOOLING
!
! TR          /-TR           0
!             /TR:NONE        0
!             /TR:NAMES       1
!             /TR:BLOCKS      3
!             /TR:ALL         7
!             /TR             7
!
! WF          /WF:2          2      NUMBER OF TEMPORARY FILES
!             /WF:N           1, 2, 3
!
! WR          /-WR           0      NO OPTIONAL WARNINGS
!             /WR            1
!
! F77         /-F77          0      FORTRAN 66 INTERPRETATION
!             /F77           1      FORTRAN 77 INTERPRETATION
!
! THE FOLOWING "GBLPAT" DEFINITIONS EFFECT DEFAULTS OF:
!
! /-CK/CO:19./-DE/-I4/-LA/LI:2/-RO/SP/TR:BLOCKS/WF:2/WR/F77
!
! DEFAULT VALUES FOR SWITCH "XX" ARE DEFINED
! BY A "GBLPAT" TO GLOBAL VARIABLE "XX000".
!
GBLPAT  =FORTRN:LA000:0
GBLPAT  =COMAND:CK000:0
GBLPAT  =COMAND:CO000:23
GBLPAT  =COMAND:DE000:0
GBLPAT  =COMAND:I4000:0
GBLPAT  =COMAND:LI000:2
GBLPAT  =COMAND:RO000:0
GBLPAT  =COMAND:SP000:1
GBLPAT  =COMAND:TR000:3
GBLPAT  =COMAND:WF000:2
GBLPAT  =COMAND:WR000:1
GBLPAT  =COMAND:F7700:1
/

```

INDEX

A

Additional temporary files, 3-1
Altering values of compiler limits, 2-2
Area, dynamic storage, 3-1

B

Building the F77 compiler,
 IAS using DCL, 7-2 to 7-3
 IAS using MCR, 6-2 to 6-3
 RSTS/E, 5-2 to 5-4
 RSX-11M/M-PLUS, 4-2 to 4-3
Building the F77 OTS,
 IAS using DCL, 7-2 to 7-3
 IAS using MCR, 6-2 to 6-3
 RSX-11M/M-PLUS, 4-2 to 4-3

C

Compilation rate,
 effects of dynamic storage area size and device type on, 3-1 to 3-4
 improving, 3-1 to 3-2
Compiler,
 command switch default settings, 2-2
 limits, altering values of, 2-2
 options, 2-2, 3-1 to 3-4
 performance, options affecting, 3-1 to 3-2
 /WF:w switch, 3-1 to 3-2
Compiler, building the,
 IAS using DCL, 7-2
 IAS using MCR, 6-2
 RSTS/E, 5-2, A-2
 RSX-11M/M-PLUS, 4-2
Compiler task, minimum disk storage for, 1-1 to 1-2
Compiler task-build files,
 IAS using DCL, B-10 to B-12
 IAS using MCR, B-7 to B-9
 RSTS/E, B-4 to B-6
 RSX-11M/M-PLUS, B-1 to B-3
Computing the size of the dynamic storage area, 3-2

D

Default FORTRAN, 2-1
 selecting F77 as the, 2-1
 selecting FOR as the, 2-2

Disk cartridge installation,
 IAS using DCL, 7-3
 IAS using MCR, 6-3
 RSTS/E, 5-3, A-3 to A-6
 RSX-11M/M-PLUS, 4-3
Disk storage,
 minimum for compiler task, 1-1 to 1-2
 minimum for Object Time System Library, 1-1 to 1-2
Distribution files, 1-3 to 1-4
Distribution media,
 files on the, 1-3
 types of, 1-3
Dynamic memory allocation, 3-2
 RSX-11M without, 3-4
Dynamic storage area, 3-1
 size of, 2-2, 3-1 to 3-4

E

EIS (extended instruction set), 3-7
Error messages,
 default version, 3-5
 OTS short version, 3-5 to 3-6
 suppressing run-time, 3-8
\$ERTXT module, 3-6
Experimental data: compiler performance, 3-3
Extended instruction set (EIS), 3-7
EXTTSK option, 3-2

F

F4PCVF.OBJ module, 3-7
F4PEIS.OBJ module, 3-7
F4PMAP.OBJ module, 3-6
F4PNER.OBJ module, 3-8
F4PNIO.OBJ module, 3-8
F4PRAN.OBJ module, 3-8
F4PRES.MAC module, 3-8
F4P11S.OBJ module, 3-4 to 3-5
F77IAS.CMD (IAS using DCL compiler build file), B-10
F77RST.CMD (RSTS/E compiler build file), B-4 to B-6
F77TST.FIN test program, 8-1
F7711D.CMD (IAS using MCR compiler build file), B-7 to B-9
F7711M.CMD (RSX-11M/M-PLUS compiler build file), B-1 to B-3

INDEX

F77 OTS options, 2-2 to 2-3
Failure of system verification
 procedure, 8-2 to 8-3
FCS-11, 2-2
 file names, 2-3
 incorporating, 4-2, 4-4, 6-2,
 6-4, 7-2, 7-4
File, compiler work, 2-2, 3-1
File systems,
 FCS-11, 2-2
 incorporating FCS-11 or RMS-11,
 2-2, 4-2, 4-4, 5-3, 5-5, 6-2
 to 6-3, 7-2, 7-4
 RMS-11, 2-2
Files on the distribution media,
 1-3

I

IAS,
 system requirements, 1-2
IAS using DCL,
 compiler build file B-10
IAS using DCL installation, 7-1
 disk cartridge distribution, 7-3
 building the compiler, 7-4
 building the OTS, 7-4
 copying the message files,
 7-5
 preparations, 7-3
 selecting compiler options,
 7-3
 invoking the compiler, 7-5
 magtape distribution,
 building the compiler, 7-2
 building the OTS, 7-2
 copying the message files, 7-3
 preparations, 7-1
 selecting compiler options, 7-2
IAS using MCR,
 compiler build file B-7
IAS using MCR installation, 6-1
 disk cartridge distribution,
 6-3
 building the compiler, 6-3
 building the OTS, 6-4
 copying the message files, 6-4
 preparations, 6-3
 selecting compiler options,
 6-3
 invoking the compiler, 6-5
 magtape distribution, 6-1
 building the compiler, 6-2
 building the OTS, 6-2
 copying the message files, 6-3
 preparations, 6-1
 selecting compiler options,
 6-2

INSTALL command,
 IAS using DCL, 2-6
 IAS using MCR, 2-6
 RSTS/E, 2-6
 RSX-11M/M-PLUS, 2-5

L

Library,
 F4PMAP, 3-6 to 3-7
 object module, 2-1
Library storage, Object Time
 System, 1-1, 1-2

M

Magtape installation,
 IAS using DCL, 7-1 to 7-3
 IAS using MCR, 6-1 to 6-3
 RSTS/E, 5-1, A-1 to A-3
 RSX-11M/M-PLUS, 4-1 to 4-3
Message file(s), copying,
 IAS using DCL, 7-3, 7-5
 IAS using MCR, 6-3, 6-4
 RSTS/E, 5-3, 5-5
 RSX-11M/M-PLUS, 4-3, 4-5
Modules, optional OTS, 3-4

N

Notes, release, 9-1

O

Object module,
 library, 2-1
 optional OTS, 3-4
 copying to system disk, IAS
 using DCL, 7-2, 7-3
 copying to system disk, IAS
 using MCR, 6-3, 6-4
 copying to system disk, RSTS/E,
 5-3, 5-5
 copying to system disk,
 RSX-11M/M-PLUS, 4-3, 4-5
Options,
 compiler, 2-2, 3-1 to 3-43,
 OTS, 2-2, 3-4
OTS,
 building the,
 IAS using DCL, 7-2, 7-4
 IAS using MCR, 6-2, 6-4
 RSTS/E, 5-2, 5-4
 RSX-11M/M-PLUS, 4-2, 4-4
 FORTRAN IV, 2-1
 FORTRAN-77, 2-1

INDEX

OTS, (Cont.)
 optional object modules, 3-4
 options, selecting F-77, 2-2
 overlay description files, 3-8
 resident library, 3-8
Overlay description files, OTS,
 3-8

P

Pages for dynamic storage area,
 3-2
Paging activity, decreasing work
 file, 3-1
Partitions for compilation, min-
 imum, 1-1, 1-2
Performance, enhancing compiler,
 3-1, 3-2
 IAS using DCL, 2-5
 IAS using MCR, 2-5
 RSTS/E, 2-4
 RSX-11M/M-PLUS, 2-4
Processor-defined functions, 3-6

R

Random number generator alternate
 module, 3-8
Release notes, 9-1
Resident library, OTS, 3-8
RMS-11, 2-2
 file names, 2-3
 incorporating, 4-2, 4-4, 5-2,
 5-5, 6-2, 6-4, 7-2, 7-4,
 8-3
RMS-OTS shared library, 3-8
RSTS/E,
 compiler build file, B-4
 system requirements, 1-2
RSTS/E installation, 5-1
 disk cartridge distribution, 5-2,
 A-3
 building the compiler, 5-2, A-4
 building the OTS, 5-2, A-4
 magnetic tape installation, 5-1,
 A-1
 building the compiler, 5-2, A-2
 building the OTS, 5-2, A-2
RSX-11M,
 system requirements, 1-1
 without dynamic memory allo-
 cation, 3-4
RSX-11M/M-PLUS,
 compiler build file, B-1
 system requirements, 1-1
RSX-11M/M-PLUS installation,
 4-1
 disk cartridge distribution, 4-3

RSX-11M/M-PLUS installation, (Cont.)
 building the compiler, 4-4
 building the OTS, 4-4
 copying the message file, 4-5
 preparations, 4-3
 selecting compiler options,
 4-4
 invoking the compiler, 4-5
 magtape distribution, 4-1
 building the compiler, 4-2
 building the OTS, 4-2
 copying the message file, 4-3
 preparations, 4-1
 selecting compiler options,
 4-2
RSX-11S, 3-5
Run-time error messages,
 reporting, 3-5
 suppressing, 3-5

S

Shareable library, 3-8
Shared global area, 3-8
\$SHORT, 3-5
Short error-text module, 3-5 to
 3-6
SHORT.OBJ module, 3-5 to 3-6
Storage,
 compiler task, 1-1, 1-2
 Object Time System, 1-1, 1-2
Storage area, dynamic, 3-1
Switch default settings, compiler
 command, 2-2
System build verification, 8-1
System requirements,
 IAS, 1-2
 RSTS/E, 1-2
 RSX-11M, 1-1
 RSX-11M-PLUS, 1-1
System tailoring, 3-1

T

Temporary file,
 additional, 3-2
 work file, 3-1
Test program, system build, 8-1

U

UFD files,
 [1,2], 1-3
 [11,36], 1-3
 [11,37], 1-3
 [11,40], 1-4

INDEX

V

Verification,
 system build, 8-1
Version, previous, 2-3

W

/WF:w compiler switch, 3-1, 3-2
Work file, 2-2, 3-1
 device, 2-2, 3-1, 3-4

READER'S COMMENTS

NOTE: This form is for document comments only. DIGITAL will use comments submitted on this form at the company's discretion. If you require a written reply and are eligible to receive one under Software Performance Report (SPR) service, submit your comments on an SPR form.

Did you find this manual understandable, usable, and well-organized? Please make suggestions for improvement.

Did you find errors in this manual? If so, specify the error and the page number.

Please indicate the type of user/reader that you most nearly represent.

- ☐ Assembly language programmer
- ☐ Higher-level language programmer
- ☐ Occasional programmer (experienced)
- ☐ User with little programming experience
- ☐ Student programmer
- ☐ Other (please specify) _____

Name _____ Date _____

Organization _____

Street _____

City _____ State _____ Zip Code _____
or Country

Do Not Tear - Fold Here and Tape

digital



No Postage
Necessary
if Mailed in the
United States

BUSINESS REPLY MAIL

FIRST CLASS PERMIT NO.33 MAYNARD MASS.

POSTAGE WILL BE PAID BY ADDRESSEE

BSSG PUBLICATIONS ZK1-3/J3-5
DIGITAL EQUIPMENT CORPORATION
110 SPIT BROOK ROAD
NASHUA, NEW HAMPSHIRE 03061

Do Not Tear - Fold Here

Cut Along Dotted Line