

6. Pull mounting box all the way out to its locked position.
7. Remove top cover of mounting box (Figure 2-1).
8. Select any backplane slot with grant continuity card in place (Figure 2-2) for adapter module installation. Remove the card.
9. Pull pawl retractors on each side of mounting box fully forward (Figure 2-1).
10. Carefully rotate mounting box to servicing (vertical) position. Release pawl retractors.
11. Remove bottom cover of mounting box (Figure 2-1).

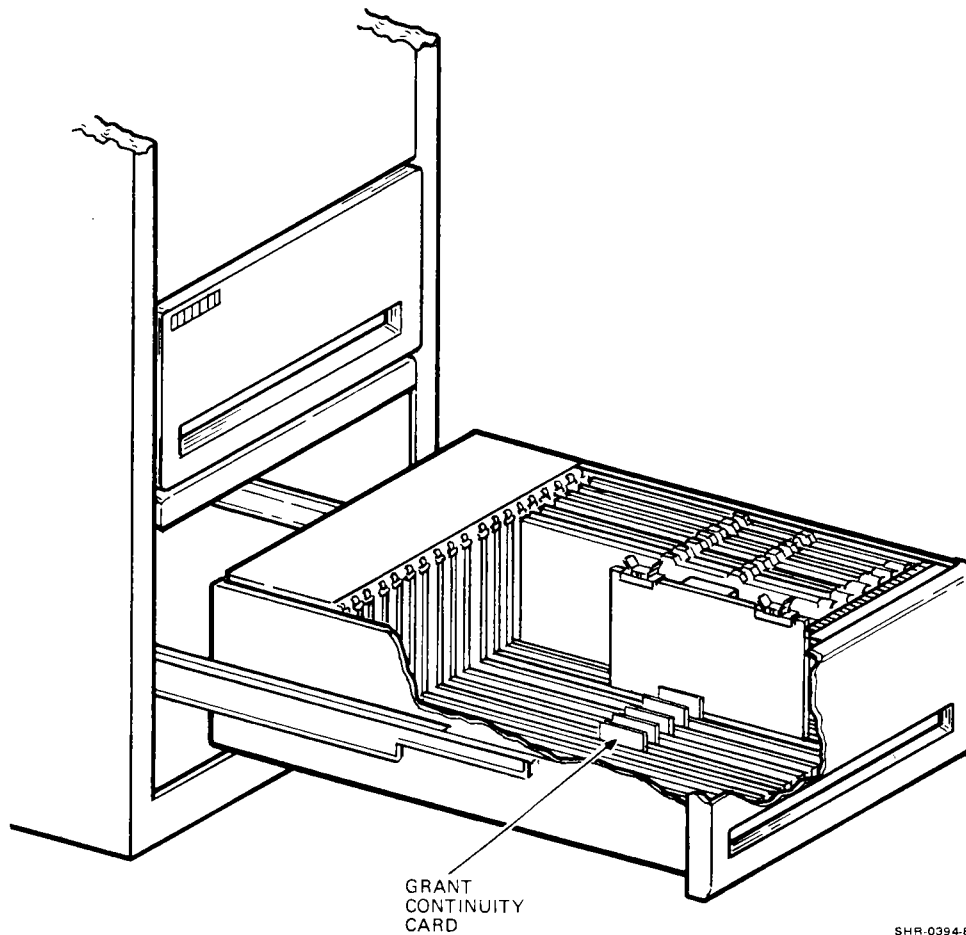


Figure 2-2 Grant Continuity Card Location

SHR-0394-85